
B2_Python_SDK

Release 2.2.1

Backblaze

May 13, 2024

CONTENTS

1 Why use b2sdk?	3
2 Documentation index	5
2.1 Installation Guide	5
2.2 Tutorial	5
2.3 Quick Start Guide	8
2.4 Server-Side Encryption	18
2.5 Advanced usage patterns	19
2.6 Glossary	27
2.7 About API interfaces	27
2.8 API Reference	30
2.9 Contributors Guide	185
3 Indices and tables	189
Python Module Index	191
Index	193

Note: **Event Notifications** feature is now in **Private Preview**. See <https://www.backblaze.com/blog/announcing-event-notifications/> for details.

b2sdk is a client library for easy access to all of the capabilities of B2 Cloud Storage.

B2 command-line tool is an example of how it can be used to provide command-line access to the B2 service, but there are many possible applications (including **FUSE filesystems**, storage backend drivers for backup applications etc).

CHAPTER
ONE

WHY USE B2SDK?

When building an application which uses B2 cloud, it is possible to implement an independent B2 API client, but using **b2sdk** allows for:

- reuse of code that is already written, with hundreds of unit tests
- use of **Synchronizer**, a high-performance, parallel rsync-like utility
- developer-friendly library *api version policy* which guards your program against incompatible changes
- **B2 integration checklist** is passed automatically
- **raw_simulator** makes it easy to mock the B2 cloud for unit testing purposes
- reporting progress of operations to an object of your choice
- exception hierarchy makes it easy to display informative messages to users
- interrupted transfers are automatically continued
- **b2sdk** has been developed for 3 years before it version 1.0.0 was released. It's stable and mature.

DOCUMENTATION INDEX

2.1 Installation Guide

2.1.1 Installing as a dependency

b2sdk can simply be added to `requirements.txt` (or equivalent such as `setup.py`, `.pipfile` etc). In order to properly set a dependency, see [versioning chapter](#) for details.

Note: The stability of your application depends on correct *pinning of versions*.

2.1.2 Installing a development version

To install **b2sdk**, checkout the repository and run:

```
pip install b2sdk
```

in your python environment.

2.2 Tutorial

2.2.1 AccountInfo

`AccountInfo` object holds information about access keys, tokens, upload urls, as well as a bucket id-name map.

It is the first object that you need to create to use **b2sdk**. Using `AccountInfo`, we'll be able to create a `B2Api` object to manage a B2 account.

In the tutorial we will use `b2sdk.v2.InMemoryAccountInfo`:

```
>>> from b2sdk.v2 import InMemoryAccountInfo
>>> info = InMemoryAccountInfo() # store credentials, tokens and cache in memory
```

With the `info` object in hand, we can now proceed to create a `B2Api` object.

Note: [AccountInfo](#) section provides guidance for choosing the correct `AccountInfo` class for your application.

2.2.2 Account authorization

```
>>> from b2sdk.v2 import B2Api  
>>> b2_api = B2Api(info)  
>>> application_key_id = '4a5b6c7d8e9f'  
>>> application_key = '001b8e23c26ff6efb941e237deb182b9599a84bef7'  
>>> b2_api.authorize_account("production", application_key_id, application_key)
```

Tip: Get credentials from B2 website

To find out more about account authorization, see [*b2sdk.v2.B2Api.authorize_account\(\)*](#)

2.2.3 B2Api

B2Api allows for account-level operations on a B2 account.

Typical B2Api operations

<code>authorize_account</code>	Perform account authorization.
<code>create_bucket</code>	Create a bucket.
<code>delete_bucket</code>	Delete a chosen bucket.
<code>list_buckets</code>	Call <code>b2_list_buckets</code> and return a list of buckets.
<code>get_bucket_by_name</code>	Return the Bucket matching the given <code>bucket_name</code> .
<code>get_bucket_by_id</code>	Return the Bucket matching the given <code>bucket_id</code> .
<code>create_key</code>	Create a new <i>application key</i> .
<code>list_keys</code>	List application keys.
<code>delete_key</code>	Delete <i>application key</i> .
<code>download_file_by_id</code>	Download a file with the given ID.
<code>list_parts</code>	Generator that yields a <i>b2sdk.v2.Part</i> for each of the parts that have been uploaded.
<code>cancel_large_file</code>	Cancel a large file upload.

```
>>> b2_api = B2Api(info)
```

to find out more, see [*b2sdk.v2.B2Api*](#).

The most practical operation on B2Api object is [*b2sdk.v2.B2Api.get_bucket_by_name\(\)*](#).

Bucket allows for operations such as listing a remote bucket or transferring files.

2.2.4 Bucket

Initializing a Bucket

Retrieve an existing Bucket

To get a Bucket object for an existing B2 Bucket:

```
>>> b2_api.get_bucket_by_name("example-mybucket-b2-1")
Bucket<346501784642eb3e60980d10,example-mybucket-b2-1,allPublic>
```

Create a new Bucket

To create a bucket:

```
>>> bucket_name = 'example-mybucket-b2-1'
>>> bucket_type = 'allPublic' # or 'allPrivate'

>>> b2_api.create_bucket(bucket_name, bucket_type)
Bucket<346501784642eb3e60980d10,example-mybucket-b2-1,allPublic>
```

You can optionally store bucket info, CORS rules and lifecycle rules with the bucket. See [b2sdk.v2.B2Api.create_bucket\(\)](#) for more details.

Note: Bucket name must be unique in B2 (across all accounts!). Your application should be able to cope with a bucket name collision with another B2 user.

Typical Bucket operations

<code>download_file_by_name</code>	Download a file by name.
<code>upload_local_file</code>	Upload a file on local disk to a B2 file.
<code>upload_bytes</code>	Upload bytes in memory to a B2 file.
<code>ls</code>	Pretend that folders exist and yields the information about the files in a folder.
<code>hide_file</code>	Hide a file.
<code>delete_file_version</code>	Delete a file version.
<code>get_download_authorization</code>	Return an authorization token that is valid only for downloading files from the given bucket.
<code>get_download_url</code>	Get file download URL.
<code>update</code>	Update various bucket parameters.
<code>set_type</code>	Update bucket type.
<code>set_info</code>	Update bucket info.

To find out more, see [b2sdk.v2.Bucket](#).

2.2.5 Summary

You now know how to use `AccountInfo`, `B2Api` and `Bucket` objects.

To see examples of some of the methods presented above, visit the *quick start guide* section.

2.3 Quick Start Guide

2.3.1 Prepare b2sdk

```
>>> from b2sdk.v2 import *
>>> info = InMemoryAccountInfo()
>>> b2_api = B2Api(info)
>>> application_key_id = '4a5b6c7d8e9f'
>>> application_key = '001b8e23c26ff6efb941e237deb182b9599a84bef7'
>>> b2_api.authorize_account("production", application_key_id, application_key)
```

Tip: Get credentials from B2 website

2.3.2 Synchronization

```
>>> from b2sdk.v2 import ScanPoliciesManager
>>> from b2sdk.v2 import parse_folder
>>> from b2sdk.v2 import Synchronizer
>>> from b2sdk.v2 import SyncReport
>>> import time
>>> import sys

>>> source = '/home/user1/b2_example'
>>> destination = 'b2://example-mybucket-b2'

>>> source = parse_folder(source, b2_api)
>>> destination = parse_folder(destination, b2_api)

>>> policies_manager = ScanPoliciesManager(exclude_all_symlinks=True)

>>> synchronizer = Synchronizer(
    max_workers=10,
    policies_manager=policies_manager,
    dry_run=False,
    allow_empty_source=True,
)

>>> no_progress = False
>>> encryption_settings_provider = BasicSyncEncryptionSettingsProvider({
    'bucket1': EncryptionSettings(mode=EncryptionMode.SSE_B2),
    'bucket2': EncryptionSettings(
        mode=EncryptionMode.SSE_C,
```

(continues on next page)

(continued from previous page)

```

        key=EncryptionKey(secret=b'VkYp3s6v9y$B&E)H@McQfTjWmZq4t7w!', id=
        ↪'user-generated-key-id')
        ),
    'bucket3': None,
})
>>> with SyncReport(sys.stdout, no_progress) as reporter:
    synchronizer.sync_folders(
        source_folder=source,
        dest_folder=destination,
        now_millis=int(round(time.time() * 1000)),
        reporter=reporter,
        encryption_settings_provider=encryption_settings_provider,
    )
upload some.pdf
upload som2.pdf

```

Tip: Sync is the preferred way of getting data into and out of B2 cloud, because it can achieve *highest performance* due to parallelization of scanning and data transfer operations.

To learn more about sync, see [Synchronizer](#).

Sync uses an encryption provider. In principle, it's a mapping between file metadata (bucket_name, file_info, etc) and *EncryptionSetting*. The reason for employing such a mapping, rather than a single *EncryptionSetting*, is the fact that users of Sync do not necessarily know up front what files it's going to upload and download. This approach enables using unique keys, or key identifiers, across files. This is covered in greater detail in [Server-Side Encryption](#).

In the example above, Sync will assume *SSE-B2* for all files in *bucket1*, *SSE-C* with the key provided for *bucket2* and rely on bucket default for *bucket3*. Should developers need to provide keys per file (and not per bucket), they need to implement their own [*b2sdk.v2.AbstractSyncEncryptionSettingsProvider*](#).

2.3.3 Bucket actions

List buckets

```

>>> b2_api.list_buckets()
[Bucket<346501784642eb3e60980d10,example-mybucket-b2-1,allPublic>]
>>> for b in b2_api.list_buckets():
    print('%s %-10s %s' % (b.id_, b.type_, b.name))
346501784642eb3e60980d10  allPublic  example-mybucket-b2-1

```

Create a bucket

```
>>> bucket_name = 'example-mybucket-b2-1' # must be unique in B2 (across all accounts!)
>>> bucket_type = 'allPublic' # or 'allPrivate'

>>> b2_api.create_bucket(bucket_name, bucket_type)
Bucket<346501784642eb3e60980d10,example-mybucket-b2-1,allPublic>
```

You can optionally store bucket info, CORS rules and lifecycle rules with the bucket. See [*b2sdk.v2.B2Api.create_bucket\(\)*](#).

Delete a bucket

```
>>> bucket_name = 'example-mybucket-b2-to-delete'
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> b2_api.delete_bucket(bucket)
```

returns *None* if successful, raises an exception in case of error.

Update bucket info

```
>>> new_bucket_type = 'allPrivate'
>>> bucket_name = 'example-mybucket-b2'

>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> new_bucket = bucket.update(
    bucket_type=new_bucket_type,
    default_server_side_encryption=EncryptionSetting(mode=EncryptionMode.SSE_B2)
)
>>> new_bucket.as_dict()
{'accountId': '451862be08d0',
 'bucketId': '5485a1682662eb3e60980d10',
 'bucketInfo': {},
 'bucketName': 'example-mybucket-b2',
 'bucketType': 'allPrivate',
 'corsRules': [],
 'lifecycleRules': [],
 'revision': 3,
 'defaultServerSideEncryption': {'isClientAuthorizedToRead': True,
                                 'value': {'algorithm': 'AES256', 'mode': 'SSE-B2'}}}
```

For more information see [*b2sdk.v2.Bucket.update\(\)*](#).

2.3.4 File actions

Tip: Sync is the preferred way of getting files into and out of B2 cloud, because it can achieve *highest performance* due to parallelization of scanning and data transfer operations.

To learn more about sync, see [Synchronizer](#).

Use the functions described below only if you *really* need to transfer a single file.

Upload file

```
>>> local_file_path = '/home/user1/b2_example/new.pdf'
>>> b2_file_name = 'dummy_new.pdf'
>>> file_info = {'how': 'good-file'}

>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> bucket.upload_local_file(
    local_file=local_file_path,
    file_name=b2_file_name,
    file_infos=file_info,
)
<b2sdk._internal.file_versionFileVersion at 0x7fc8cd560550>
```

This will work regardless of the size of the file - `upload_local_file` automatically uses large file upload API when necessary.

For more information see [b2sdk.v2.Bucket.upload_local_file\(\)](#).

Upload file encrypted with SSE-C

```
>>> local_file_path = '/home/user1/b2_example/new.pdf'
>>> b2_file_name = 'dummy_new.pdf'
>>> file_info = {'how': 'good-file'}
>>> encryption_setting = EncryptionSetting(
    mode=EncryptionMode.SSE_C,
    key=EncryptionKey(secret=b'VkYp3s6v9y$B&E)H@McQfTjWmZq4t7w!', id='user-generated-
->key-id'),
)

>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> bucket.upload_local_file(
    local_file=local_file_path,
    file_name=b2_file_name,
    file_infos=file_info,
    encryption=encryption_setting,
)
```

Download file

By id

```
>>> from b2sdk.v2 import DoNothingProgressListener

>>> local_file_path = '/home/user1/b2_example/new2.pdf'
>>> file_id = '4_z5485a1682662eb3e60980d10_f1195145f42952533_d20190403_m130258_c002_
->v0001111_t0002'
>>> progress_listener = DoNothingProgressListener()

>>> downloaded_file = b2_api.download_file_by_id(file_id, progress_listener) # only the_
->headers
    # and the beginning of the file is downloaded at this stage

>>> print('File name: ', downloaded_file.download_version.file_name)
File name: som2.pdf
>>> print('File id: ', downloaded_file.download_version.id_)
File id: 4_z5485a1682662eb3e60980d10_f1195145f42952533_d20190403_m130258_c002_
->v0001111_t0002
>>> print('File size: ', downloaded_file.download_version.size)
File size: 1870579
>>> print('Content type:', downloaded_file.download_version.content_type)
Content type: application/pdf
>>> print('Content sha1:', downloaded_file.download_version.content_sha1)
Content sha1: d821849a70922e87c2b0786c0be7266b89d87df0

>>> downloaded_file.save_to(local_file_path) # this downloads the whole file
```

By name

```
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> b2_file_name = 'dummy_new.pdf'
>>> local_file_name = '/home/user1/b2_example/new3.pdf'
>>> downloaded_file = bucket.download_file_by_name(b2_file_name)
>>> downloaded_file.save_to(local_file_path)
```

Downloading encrypted files

Both methods (*By name* and *By id*) accept an optional *encryption* argument, similarly to *Upload file*. This parameter is necessary for downloading files encrypted with *SSE-C*.

List files

```
>>> bucket_name = 'example-mybucket-b2'
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> for file_version, folder_name in bucket.ls(latest_only=True):
>>>     print(file_version.file_name, file_version.upload_timestamp, folder_name)
f2.txt 1560927489000 None
som2.pdf 1554296578000 None
some.pdf 1554296579000 None
test-folder/.bzEmpty 1561005295000 test-folder/

# Recursive
>>> bucket_name = 'example-mybucket-b2'
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> for file_version, folder_name in bucket.ls(latest_only=True, recursive=True):
>>>     print(file_version.file_name, file_version.upload_timestamp, folder_name)
f2.txt 1560927489000 None
som2.pdf 1554296578000 None
some.pdf 1554296579000 None
test-folder/.bzEmpty 1561005295000 test-folder/
test-folder/folder_file.txt 1561005349000 None
```

Note: The files are returned recursively and in order so all files in a folder are printed one after another. The *folder_name* is returned only for the first file in the folder.

```
# Within folder
>>> bucket_name = 'example-mybucket-b2'
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> for file_version, folder_name in bucket.ls(folder_to_list='test-folder', latest_
only=True):
>>>     print(file_version.file_name, file_version.upload_timestamp, folder_name)
test-folder/.bzEmpty 1561005295000 None
test-folder/folder_file.txt 1561005349000 None

# list file versions
>>> for file_version, folder_name in bucket.ls(latest_only=False):
>>>     print(file_version.file_name, file_version.upload_timestamp, folder_name)
f2.txt 1560927489000 None
f2.txt 1560849524000 None
som2.pdf 1554296578000 None
some.pdf 1554296579000 None
```

For more information see *b2sdk.v2.Bucket.ls()*.

Get file metadata

```
>>> file_id = '4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_<br>v0001095_t0044'
>>> file_version = b2_api.get_file_info(file_id)
>>> file_version.as_dict()
{'accountId': '451862be08d0',
 'action': 'upload',
 'bucketId': '5485a1682662eb3e60980d10',
 'contentLength': 1870579,
 'contentSha1': 'd821849a70922e87c2b0786c0be7266b89d87df0',
 'contentType': 'application/pdf',
 'fileId': '4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_<br>v0001095_t0044',
 'fileInfo': {'how': 'good-file', 'sse_c_key_id': 'user-generated-key-id'},
 'fileName': 'dummy_new.pdf',
 'uploadTimestamp': 1554361150000,
 "serverSideEncryption": {"algorithm": "AES256",
                           "mode": "SSE-C"},  
}
```

Update file lock configuration

```
>>> file_id = '4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_<br>v0001095_t0044'
>>> file_name = 'dummy.pdf'
>>> b2_api.update_file_legal_hold(file_id, file_name, LegalHold.ON)
>>> b2_api.update_file_legal_hold(
    file_id, file_name,
    FileRetentionSetting(RetentionPolicy.GOVERNANCE, int(time.time() + 100)*1000))
```

This is low-level file API, for high-level operations see *Direct file operations*.

Copy file

```
>>> file_id = '4_z5485a1682662eb3e60980d10_f118df9ba2c5131e8_d20190619_m065809_c002_<br>v0001126_t0040'
>>> new_file_version = bucket.copy(file_id, 'f2_copy.txt')
>>> new_file_version.as_dict()
{'accountId': '451862be08d0',
 'action': 'copy',
 'bucketId': '5485a1682662eb3e60980d10',
 'contentLength': 124,
 'contentSha1': '737637702a0e41dda8b7be79c8db1d369c6eef4a',
 'contentType': 'text/plain',
 'fileId': '4_z5485a1682662eb3e60980d10_f1022e2320daf707f_d20190620_m122848_c002_<br>v0001123_t0020',
 'fileInfo': {'src_last_modified_millis': '1560848707000'},
 'fileName': 'f2_copy.txt',
 'uploadTimestamp': 1561033728000,
```

(continues on next page)

(continued from previous page)

```
"serverSideEncryption": {"algorithm": "AES256",
                         "mode": "SSE-B2"}}
```

If the `content_length` is not provided and the file is larger than 5GB, `copy` would not succeed and error would be raised. If length is provided, then the file may be copied as a large file. Maximum copy part size can be set by `max_copy_part_size` - if not set, it will default to 5GB. If `max_copy_part_size` is lower than `absoluteMinimumPartSize`, file would be copied in single request - this may be used to force copy in single request large file that fits in server small file limit.

Copying files allows for providing encryption settings for both source and destination files - SSE-C encrypted source files cannot be used unless the proper key is provided.

If you want to copy just the part of the file, then you can specify the offset and content length:

```
>>> file_id = '4_z5485a1682662eb3e60980d10_f118df9ba2c5131e8_d20190619_m065809_c002_
↪v0001126_t0040'
>>> bucket.copy(file_id, 'f2_copy.txt', offset=1024, length=2048)
```

Note that content length is required for offset values other than zero.

For more information see [b2sdk.v2.Bucket.copy\(\)](#).

Delete file

```
>>> file_id = '4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_
↪v0001095_t0044'
>>> file_id_and_name = b2_api.delete_file_version(file_id, 'dummy_new.pdf')
>>> file_id_and_name.as_dict()
{'action': 'delete',
 'fileId': '4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_
↪v0001095_t0044',
 'fileName': 'dummy_new.pdf'}
```

This is low-level file API, for high-level operations see [Direct file operations](#).

Cancel large file uploads

```
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> for unfinished_file in bucket.list_unfinished_large_files():
    b2_api.cancel_large_file(unfinished_file.file_id, unfinished_file.file_name)
```

2.3.5 Direct file operations

Methods for manipulating object (file) state mentioned in sections above are low level and useful when users have access to basic information, like file id and name. Many API methods, however, return python objects representing files ([b2sdk.v2FileVersion](#) and [b2sdk.v2.DownloadVersion](#)), that provide high-level access to methods manipulating their state. As a rule, these methods don't change properties of python objects they are called on, but return new objects instead.

Obtain file representing objects

`b2sdk.v2FileVersion`

By id

```
>>> file_id = '4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_
↪v0001095_t0044'
>>> file_version = b2_api.get_file_info(file_id)
```

By listing

```
>>> for file_version, folder_name in bucket.ls(latest_only=True, prefix='dir_name'):
>>>     ...
```

`b2sdk.v2.DownloadVersion`

By id

```
>>> file_id = '4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_
↪v0001095_t0044'
>>> downloaded_file = b2_api.download_file_by_id(file_id)
>>> download_version = downloaded_file.download_version
```

By name

```
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> b2_file_name = 'dummy_new.pdf'
>>> downloaded_file = bucket.download_file_by_name(b2_file_name)
>>> download_version = downloaded_file.download_version
```

Download (only for `b2sdk.v2FileVersion`)

```
>>> file_version.download()
>>> # equivalent to
>>> b2_api.download_file_by_id(file_version.id_)
```

Delete

```
>>> file_version.delete()
>>> download_version.delete()
>>> # equivalent to
>>> b2_api.delete_file_version(file_version.id_, file_version.file_name)
>>> b2_api.delete_file_version(download_version.id_, download_version.file_name)
```

Update file lock

```
>>> file_version.update_legal_hold(LegalHold.ON)
>>> download_version.update_legal_hold(LegalHold.ON)
>>> file_version.update_retention(
    FileRetentionSetting(RetentionPolicy.GOVERNANCE, int(time.time() + 100)*1000))
>>> download_version.update_retention(
    FileRetentionSetting(RetentionPolicy.GOVERNANCE, int(time.time() + 100)*1000))
>>> # equivalent to
>>> b2_api.update_file_legal_hold(file_version.id_, file_version.file_name, LegalHold.ON)
>>> b2_api.update_file_legal_hold(download_version.id_, download_version.file_name, LegalHold.ON)
>>> b2_api.update_file_legal_hold(
    file_version.id_, file_version.file_name,
    FileRetentionSetting(RetentionPolicy.GOVERNANCE, int(time.time() + 100)*1000))
>>> b2_api.update_file_legal_hold(
    download_version.id_, download_version.file_name,
    FileRetentionSetting(RetentionPolicy.GOVERNANCE, int(time.time() + 100)*1000))
```

Usage examples

```
>>> for file_version, folder_name in bucket.ls(latest_only=True, prefix='dir_name'):
>>>     if file_version.mod_time_millis < 1627979193913 and file_version.file_name.endswith('.csv'):
>>>         if file_version.legal_hold.is_on():
>>>             file_version = file_version.update_legal_hold(LegalHold.OFF)
>>>             file_version.delete()
>>>     else:
>>>         file_version.download().save_to(Path('/tmp/dir_name') / file_version.file_name)
```

```
>>> file_id = '4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_v0001095_t0044'
>>> downloaded_file = b2_api.download_file_by_id(file_id)
>>> download_version = downloaded_file.download_version
>>> if download_version.content_type == 'video/mp4':
>>>     downloaded_file.save_to(Path('/tmp/dir_name') / download_version.file_name)
>>> if download_version.file_retention != NO_RETENTION_FILE_SETTING:
>>>     download_version = download_version.update_retention(
>>>         NO_RETENTION_FILE_SETTING, bypass_governance=True)
>>> download_version.delete()
```

2.4 Server-Side Encryption

2.4.1 Cloud

B2 cloud supports [Server-Side Encryption](#). All read and write operations provided by **b2sdk** accept encryption settings as an optional argument. Not supplying this argument means relying on bucket defaults - for **SSE-B2** and for no encryption. In case of **SSE-C**, providing a decryption key is required for successful downloading and copying.

2.4.2 API

Methods and classes that require encryption settings all accept an *EncryptionSetting* object, which holds information about present or desired encryption (mode, algorithm, key, key_id). Some, like copy operations, accept two sets of settings (for source and for destination). Sync, however, accepts an *EncryptionSettingsProvider* object, which is an *EncryptionSetting* factory, yielding them based on file metadata. For details, see

- [Encryption Settings](#)
- [Encryption Types](#)
- [Sync Encryption Settings Providers](#)

2.4.3 High security: use unique keys

B2 cloud does not promote or discourage either reusing encryption keys or using unique keys for *SSE-C*. In applications requiring enhanced security, using unique key per file is a good strategy. **b2sdk** follows a convention, that makes managing such keys easier: *EncryptionSetting* holds a key identifier, aside from the key itself. This key identifier is saved in the metadata of all files uploaded, created or copied via **b2sdk** methods using *SSE-C*, under *sse_c_key_id* in *fileInfo*. This allows developers to create key managers that map those ids to keys, stored securely in a file or a database. Implementing such managers, and linking them to [*b2sdk.v2.AbstractSyncEncryptionSettingsProvider*](#) implementations (necessary for using Sync) is outside of the scope of this library.

There is, however, a convention to such managers that authors of this library strongly suggest: if a manager needs to generate a new key-key_id pair for uploading, it's best to commit this data to the underlying storage before commencing the upload. The justification of such approach is: should the key-key_id pair be committed to permanent storage after completing an IO operation, committing could fail after successfully upload the data. This data, however, is now just a random blob, that can never be read, since the key to decrypting it is lost.

This approach comes an overhead: to download a file, its *fileInfo* has to be known. This means that fetching metadata is required before downloading.

2.4.4 Moderate security: a single key with many ids

Should the application's infrastructure require a single key (or a limited set of keys) to be used in a bucket, authors of this library recommend generating a unique key identifier for each file anyway (even though these unique identifiers all point to the same key value). This obfuscates confidential metadata from malicious users, like which files are encrypted with the same key, the total number of different keys, etc.

2.5 Advanced usage patterns

B2 server API allows for creation of an object from existing objects. This allows to avoid transferring data from the source machine if the desired outcome can be (at least partially) constructed from what is already on the server.

The way **b2sdk** exposes this functionality is through a few functions that allow the user to express the desired outcome and then the library takes care of planning and executing the work. Please refer to the table below to compare the support of object creation methods for various usage patterns.

2.5.1 Available methods

Method / supported options	Source	Range overlap	Streaming interface	<i>Continuation</i>
<code>b2sdk.v2.Bucket.upload()</code>	local	no	no	automatic
<code>b2sdk.v2.Bucket.copy()</code>	remote	no	no	automatic
<code>b2sdk.v2.Bucket.concatenate()</code>	any	no	no	automatic
<code>b2sdk.v2.Bucket.concatenate_stream()</code>	any	no	yes	manual
<code>b2sdk.v2.Bucket.create_file()</code>	any	yes	no	automatic
<code>b2sdk.v2.Bucket.create_file_stream()</code>	any	yes	yes	manual

Range overlap

Some methods support overlapping ranges between local and remote files. **b2sdk** tries to use the remote ranges as much as possible, but due to limitations of `b2_copy_part` (specifically the minimum size of a part) that may not be always possible. A possible solution for such case is to download a (small) range and then upload it along with another one, to meet the `b2_copy_part` requirements. This can be improved if the same data is already available locally - in such case **b2sdk** will use the local range rather than downloading it.

Streaming interface

Some object creation methods start writing data before reading the whole input (iterator). This can be used to write objects that do not have fully known contents without writing them first locally, so that they could be copied. Such usage pattern can be relevant to small devices which stream data to B2 from an external NAS, where caching large files such as media files or virtual machine images is not an option.

Please see [advanced method support table](#) to see where streaming interface is supported.

Continuation

Please see [here](#)

2.5.2 Concatenate files

`b2sdk.v2.Bucket.concatenate()` accepts an iterable of upload sources (either local or remote). It can be used to glue remote files together, back-to-back, into a new file.

`b2sdk.v2.Bucket.concatenate_stream()` does not create and validate a plan before starting the transfer, so it can be used to process a large input iterator, at a cost of limited automated continuation.

Concatenate files of known size

```
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> input_sources = [
...     CopySource('4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_
...v0001095_t0044', offset=100, length=100),
...     UploadSourceLocalFile('my_local_path/to_file.txt'),
...     CopySource('4_z5485a1682662eb3e60980d10_f1022e2320daf707f_d20190620_m122848_c002_
...v0001123_t0020', length=2123456789),
... ]
>>> file_info = {'how': 'good-file'}
>>> bucket.concatenate(input_sources, remote_name, file_info)
<b2sdk._internal.file_versionFileVersion at 0x7fc8cd560551>
```

If one of remote source has length smaller than `absoluteMinimumPartSize` then it cannot be copied into large file part. Such remote source would be downloaded and concatenated locally with local source or with other downloaded remote source.

Please note that this method only allows checksum verification for local upload sources. Checksum verification for remote sources is available only when local copy is available. In such case `b2sdk.v2.Bucket.create_file()` can be used with overlapping ranges in input.

For more information about `concatenate` please see `b2sdk.v2.Bucket.concatenate()` and `b2sdk.v2.CopySource`.

Concatenate files of known size (streamed version)

`b2sdk.v2.Bucket.concatenate()` accepts an iterable of upload sources (either local or remote). The operation would not be planned ahead so it supports very large output objects, but continuation is only possible for local only sources and provided unfinished large file id. See more about continuation in `b2sdk.v2.Bucket.create_file()` paragraph about continuation.

```
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> input_sources = [
...     CopySource('4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_
...v0001095_t0044', offset=100, length=100),
...     UploadSourceLocalFile('my_local_path/to_file.txt'),
...     CopySource('4_z5485a1682662eb3e60980d10_f1022e2320daf707f_d20190620_m122848_c002_
...v0001123_t0020', length=2123456789),
... ]
>>> file_info = {'how': 'good-file'}
>>> bucket.concatenate_stream(input_sources, remote_name, file_info)
<b2sdk._internal.file_versionFileVersion at 0x7fc8cd560551>
```

Concatenate files of unknown size

While it is supported by B2 server, this pattern is currently not supported by **b2sdk**.

2.5.3 Synthesize an object

Using methods described below an object can be created from both local and remote sources while avoiding downloading small ranges when such range is already present on a local drive.

Update a file efficiently

`b2sdk.v2.Bucket.create_file()` accepts an iterable which *can contain overlapping destination ranges*.

Note: Following examples *create* new file - data in bucket is immutable, but **b2sdk** can create a new file version with the same name and updated content

Append to the end of a file

The assumption here is that the file has been appended to since it was last uploaded to. This assumption is verified by **b2sdk** when possible by recalculating checksums of the overlapping remote and local ranges. If copied remote part sha does not match with locally available source, file creation process would be interrupted and an exception would be raised.

```
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> input_sources = [
...     WriteIntent(
...         data=CopySource(
...             '4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_c002_',
...             v0001095_t0044',
...             offset=0,
...             length=5000000,
...         ),
...         destination_offset=0,
...     ),
...     WriteIntent(
...         data=UploadSourceLocalFile('my_local_path/to_file.txt'), # of length_
...             60000000,
...         destination_offset=0,
...     ),
... ]
>>> file_info = {'how': 'good-file'}
>>> bucket.create_file(input_sources, remote_name, file_info)
<b2sdk._internal.file_versionFileVersion at 0x7fc8cd560552>
```

`LocalUploadSource` has the size determined automatically in this case. This is more efficient than `b2sdk.v2.Bucket.concatenate()`, as it can use the overlapping ranges when a remote part is smaller than `absoluteMinimumPartSize` to prevent downloading a range (when concatenating, local source would have destination offset at the end of remote source)

For more information see `b2sdk.v2.Bucket.create_file()`.

Change the middle of the remote file

```
>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> input_sources = [
...     WriteIntent(
...         CopySource('4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_',
...             offset=0, length=4000000),
...         destination_offset=0,
...     ),
...     WriteIntent(
...         UploadSourceLocalFile('my_local_path/to_file.txt'), # length=1024, here not
...             passed and just checked from local source using seek
...         destination_offset=4000000,
...     ),
...     WriteIntent(
...         CopySource('4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_',
...             offset=4001024, length=123456789),
...         destination_offset=4001024,
...     ),
... ],
... ]
>>> file_info = {'how': 'good-file'}
>>> bucket.create_file(input_sources, remote_name, file_info)
<b2sdk._internal.file_versionFileVersion at 0x7fc8cd560552>
```

LocalUploadSource has the size determined automatically in this case. This is more efficient than *b2sdk.v2.Bucket.concatenate()*, as it can use the overlapping ranges when a remote part is smaller than *absoluteMinimumPartSize* to prevent downloading a range.

For more information see *b2sdk.v2.Bucket.create_file()*.


Synthesize a file from local and remote parts

This is useful for expert usage patterns such as:

- synthetic backup
- reverse synthetic backup
- mostly-server-side cutting and gluing uncompressed media files such as *wav* and *avi* with rewriting of file headers
- various deduplicated backup scenarios

Please note that *b2sdk.v2.Bucket.create_file_stream()* accepts **an ordered iterable** which *can contain overlapping ranges*, so the operation does not need to be planned ahead, but can be streamed, which supports very large output objects.

Scenarios such as below are then possible:

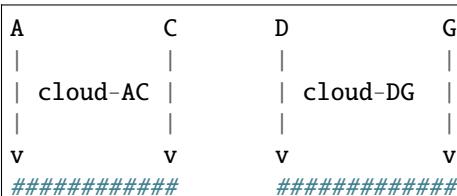

(continues on next page)

(continued from previous page)



```

>>> bucket = b2_api.get_bucket_by_name(bucket_name)
>>> def generate_input():
...     yield WriteIntent(
...         CopySource('4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_'
...             ↵c002_v0001095_t0044', offset=0, length=lengthC),
...         destination_offset=0,
...     )
...     yield WriteIntent(
...         UploadSourceLocalFile('my_local_path/to_file.txt'), # length = offsetF -
...             ↵offsetB
...         destination_offset=offsetB,
...     )
...     yield WriteIntent(
...         CopySource('4_z5485a1682662eb3e60980d10_f113f963288e711a6_d20190404_m065910_'
...             ↵c002_v0001095_t0044', offset=0, length=offsetG-offsetD),
...         destination_offset=offsetD,
...     )
...
>>> file_info = {'how': 'good-file'}
>>> bucket.create_file(generate_input(), remote_name, file_info)
<b2sdk._internal.file_versionFileVersion at 0x7fc8cd560552>

```

In such case, if the sizes allow for it (there would be no parts smaller than *absoluteMinimumPartSize*), the only uploaded part will be C-D. Otherwise, more data will be uploaded, but the data transfer will be reduced in most cases. *b2sdk.v2.Bucket.create_file()* does not guarantee that outbound transfer usage would be optimal, it uses a simple greedy algorithm with as small look-aheads as possible.


For more information see *b2sdk.v2.Bucket.create_file()*.

Encryption

Even if files *A-C* and *D-G* are encrypted using SSE-C with different keys, they can still be used in a single `b2sdk.v2.Bucket.create_file()` call, because `b2sdk.v2.CopySource` accepts an optional `b2sdk.v2.EncryptionSetting`.

Prioritize remote or local sources

`b2sdk.v2.Bucket.create_file()` and `b2sdk.v2.Bucket.create_file_stream()` support source/origin prioritization, so that planner would know which sources should be used for overlapping ranges. Supported values are: *local*, *remote* and *local_verification*.

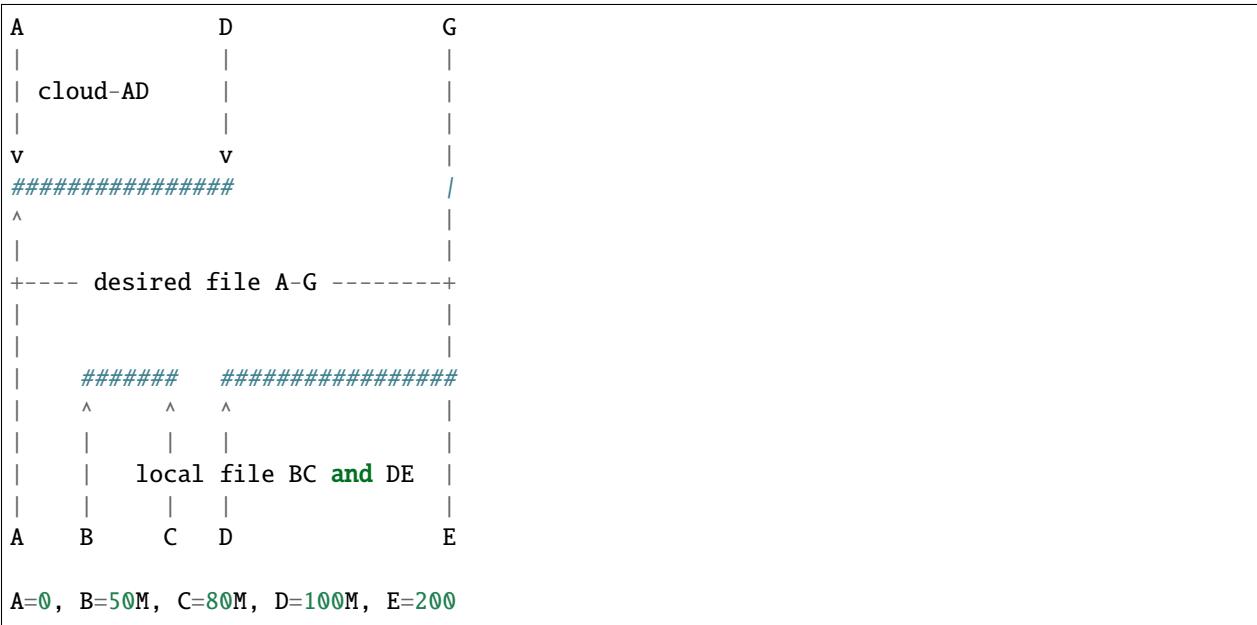

```
>>> bucket.create_file(input_sources, remote_name, file_info, prioritize='local')
# planner parts: cloud[A, B], local[B, C], remote[C, D], local[D, E]
```

Here the planner has only used a remote source where remote range was not available, minimizing downloads.

```
>>> planner.create_file(input_sources, remote_name, file_info, prioritize='remote')
# planner parts: cloud[A, D], local[D, E]
```

Here the planner has only used a local source where remote range was not available, minimizing uploads.

```
>>> bucket.create_file(input_sources, remote_name, file_info)
# or
>>> bucket.create_file(input_sources, remote_name, file_info, prioritize='local_
    ↵verification')
# planner parts: cloud[A, B], cloud[B, C], cloud[C, D], local[D, E]
```

In *local_verification* mode the remote range was artificially split into three parts to allow for checksum verification against matching local ranges.

Note: `prioritize` is just a planner setting - remote parts are always verified if matching local parts exists.

2.5.4 Continuation

Continuation of upload

In order to continue a simple upload session, `b2sdk` checks for any available sessions with the same `file_name`, `file_info` and `media_type`, verifying the size of an object as much as possible.

To support automatic continuation, some advanced methods create a plan before starting copy/upload operations, saving the hash of that plan in `file_info` for increased reliability.

If that is not available, `large_file_id` can be extracted via callback during the operation start. It can then be passed into the subsequent call to continue the same task, though the responsibility for passing the exact same input is then on the user of the function. Please see [advanced method support table](#) to see where automatic continuation is supported. `large_file_id` can also be passed if automatic continuation is available in order to avoid issues where multiple matching upload sessions are matching the transfer.

Continuation of create/concatenate

`b2sdk.v2.Bucket.create_file()` supports automatic continuation or manual continuation. `b2sdk.v2.Bucket.create_file_stream()` supports only manual continuation for local-only inputs. The situation looks the same for `b2sdk.v2.Bucket.concatenate()` and `b2sdk.v2.Bucket.concatenate_stream()` (streamed version supports only manual continuation of local sources). Also `b2sdk.v2.Bucket.upload()` and `b2sdk.v2.Bucket.copy()` support both automatic and manual continuation.

Manual continuation

```
>>> def large_file_callback(large_file):
...     # storage is not part of the interface - here only for demonstration purposes
...     storage.store({'name': remote_name, 'large_file_id': large_file.id})
>>> bucket.create_file(input_sources, remote_name, file_info, large_file_callback=large_
->file_callback)
# ...
>>> large_file_id = storage.query({'name': remote_name})[0]['large_file_id']
>>> bucket.create_file(input_sources, remote_name, file_info, large_file_id=large_file_
->id)
```

Manual continuation (streamed version)

```
>>> def large_file_callback(large_file):
...     # storage is not part of the interface - here only for demonstration purposes
...     storage.store({'name': remote_name, 'large_file_id': large_file.id})
>>> bucket.create_file_stream(input_sources, remote_name, file_info, large_file_
->callback=large_file_callback)
# ...
>>> large_file_id = storage.query({'name': remote_name})[0]['large_file_id']
>>> bucket.create_file_stream(input_sources, remote_name, file_info, large_file_id=large_
->file_id)
```

Streams that contain remote sources cannot be continued with `b2sdk.v2.Bucket.create_file()` - internally `b2sdk.v2.Bucket.create_file()` stores plan information in file info for such inputs, and verifies it before any

copy/upload and `b2sdk.v2.Bucket.create_file_stream()` cannot store this information. Local source only inputs can be safely continued with `b2sdk.v2.Bucket.create_file()` in auto continue mode or manual continue mode (because plan information is not stored in file info in such case).

Auto continuation

```
>>> bucket.create_file(input_sources, remote_name, file_info)
```

For local source only input, `b2sdk.v2.Bucket.create_file()` would try to find matching unfinished large file. It will verify uploaded parts checksums with local sources - the most completed, having all uploaded parts matched candidate would be automatically selected as file to continue. If there is no matching candidate (even if there are unfinished files for the same file name) new large file would be started.

In other cases plan information would be generated and `b2sdk.v2.Bucket.create_file()` would try to find unfinished large file with matching plan info in its file info. If there is one or more such unfinished large files, `b2sdk.v2.Bucket.create_file()` would verify checksums for all locally available parts and choose any matching candidate. If all candidates fails on uploaded parts checksums verification, process is interrupted and error raises. In such case corrupted unfinished large files should be cancelled manually and `b2sdk.v2.Bucket.create_file()` should be retried, or auto continuation should be turned off with `auto_continue=False`

No continuation

```
>>> bucket.create_file(input_sources, remote_name, file_info, auto_continue=False)
```

Note, that this only forces start of a new large file - it is still possible to continue the process with either auto or manual modes.

2.5.5 SHA-1 hashes for large files

Depending on the number and size of sources and the size of the result file, the SDK may decide to use the large file API to create a file on the server. In such cases the file's SHA-1 won't be stored on the server in the X-Bz-Content-Sha1 header, but it may optionally be stored with the file in the `large_file_sha1` entry in the `file_info`, as per [B2 integration checklist](https://www.backblaze.com/b2/docs/integration_checklist.html).

In basic scenarios, large files uploaded to the server will have a `large_file_sha1` element added automatically to their `file_info`. However, when concatenating multiple sources, it may be impossible for the SDK to figure out the SHA-1 automatically. In such cases, the SHA-1 can be provided using the `large_file_sha1` parameter to `b2sdk.v2.Bucket.create_file()`, `b2sdk.v2.Bucket.concatenate()` and their stream equivalents. If the parameter is skipped or `None`, the result file may not have the `large_file_sha1` value set.

Note that the provided SHA-1 value is not verified.

2.6 Glossary

absoluteMinimumPartSize

The smallest large file part size, as indicated during authorization process by the server (in 2019 it used to be 5MB, but the server can set it dynamically)

account ID

An identifier of the B2 account (not login). Looks like this: 4ba5845d7aaf.

application key ID

Since every *account ID* can have multiple access keys associated with it, the keys need to be distinguished from each other. *application key ID* is an identifier of the access key. There are two types of keys: *master application key* and *non-master application key*.

application key

The secret associated with an *application key ID*, used to authenticate with the server. Looks like this: N2Zug0evLcHDlh_L0Z0AJhiGGdY or 0a1bce5ea463a7e4b090ef5bd6bd82b851928ab2c6 or K0014pbwo1zxcIVMnqSNTfWHReU/O3s

b2sdk version

Looks like this: v1.0.0 or 1.0.0 and makes version numbers meaningful. See *Pinning versions* for more details.

b2sdk interface version

Looks like this: v2 or b2sdk.v2 and makes maintaining backward compatibility much easier. See *interface versions* for more details.

master application key

This is the first key you have access to, it is available on the B2 web application. This key has all capabilities, access to all *buckets*, and has no file prefix restrictions or expiration. The *application key ID* of the master application key is equal to *account ID*.

non-master application key

A key which can have restricted capabilities, can only have access to a certain *bucket* or even to just part of it. See https://www.backblaze.com/b2/docs/application_keys.html to learn more. Looks like this: 0014aa9865d6f000000000000b0

bucket

A container that holds files. You can think of buckets as the top-level folders in your B2 Cloud Storage account. There is no limit to the number of files in a bucket, but there is a limit of 100 buckets per account. See <https://www.backblaze.com/b2/docs/buckets.html> to learn more.

2.7 About API interfaces

2.7.1 Semantic versioning

b2sdk follows Semantic Versioning policy, so in essence the version number is MAJOR.MINOR.PATCH (for example 1.2.3) and:

- we increase **MAJOR** version when we make **incompatible** API changes
- we increase **MINOR** version when we add functionality **in a backwards-compatible manner**, and
- we increase **PATCH** version when we make backwards-compatible **bug fixes** (unless someone relies on the undocumented behavior of a fixed bug)

Therefore when setting up **b2sdk** as a dependency, please make sure to match the version appropriately, for example you could put this in your `requirements.txt` to make sure your code is compatible with the `b2sdk` version your user will get from pypi:

```
b2sdk>=1.15.0,<2.0.0
```

2.7.2 Interface versions

You might notice that the import structure provided in the documentation looks a little odd: `from b2sdk.v2 import ...`. The `.v2` part is used to keep the interface fluid without risk of breaking applications that use the old signatures. With new versions, **b2sdk** will provide functions with signatures matching the old ones, wrapping the new interface in place of the old one. What this means for a developer using **b2sdk**, is that it will just keep working. We have already deleted some legacy functions when moving from `.v0` to `.v1`, providing equivalent wrappers to reduce the migration effort for applications using pre-1.0 versions of **b2sdk** to fixing imports.

It also means that **b2sdk** developers may change the interface in the future and will not need to maintain many branches and backport fixes to keep compatibility of for users of those old branches.

2.7.3 Interface version compatibility

A *numbered interface* will not be exactly identical throughout its lifespan, which should not be a problem for anyone, however just in case, the acceptable differences that the developer must tolerate, are listed below.

Exceptions

The exception hierarchy may change in a backwards compatible manner and the developer must anticipate it. For example, if `b2sdk.v2.ExceptionC` inherits directly from `b2sdk.v2.ExceptionA`, it may one day inherit from `b2sdk.v2.ExceptionB`, which in turn inherits from `b2sdk.v2.ExceptionA`. Normally this is not a problem if you use `isinstance()` and `super()` properly, but your code should not call the constructor of a parent class by directly naming it or it might skip the middle class of the hierarchy (`ExceptionB` in this example).

Extensions

Even in the same interface version, objects/classes/enums can get additional fields and their representations such as `as_dict()` or `__repr__` (but not `__str__`) may start to contain those fields.

Methods and functions can start accepting new **optional** arguments. New methods can be added to existing classes.

Performance

Some effort will be put into keeping the performance of the old interfaces, but in rare situations old interfaces may end up with a slightly degraded performance after a new version of the library is released. If performance target is absolutely critical to your application, you can pin your dependencies to the middle version (using `b2sdk>=X.Y.0, <X.Y+1.0`) as **b2sdk** will increment the middle version when introducing a new interface version if the wrapper for the older interfaces is likely to affect performance.

2.7.4 Public interface

Public interface consists of **public** members of modules listed in *Public API* section. This should be used in 99% of use cases, it's enough to implement anything from a [console tool](#) to a [FUSE filesystem](#).

Those modules will generally not change in a backwards-incompatible way between non-major versions. Please see [interface version compatibility](#) chapter for notes on what changes must be expected.

Hint: If the current version of **b2sdk** is 4.5.6 and you only use the *public* interface, put this in your `requirements.txt` to be safe:

```
b2sdk>=4.5.6,<5.0.0
```

Note: `b2sdk.*._something` and `b2sdk.*.*._something`, while having a name beginning with an underscore, are **NOT** considered public interface.

2.7.5 Internal interface

Some rarely used features of B2 cloud are not implemented in **b2sdk**. Tracking usage of transactions and transferred data is a good example - if it is required, additional work would need to be put into a specialized internal interface layer to enable accounting and reporting.

b2sdk maintainers are [very supportive](#) in case someone wants to contribute an additional feature. Please consider adding it to the sdk, so that more people can use it. This way it will also receive our updates, unlike a private implementation which would not receive any updates unless you apply them manually (but that's a lot of work and we both know it's not going to happen). In practice, an implementation can be either shared or will quickly become outdated. The license of **b2sdk** is very permissive, but when considering whether to keep your patches private or public, please take into consideration the long-term cost of keeping up with a dynamic open-source project and/or the cost of missing the updates, especially those related to performance and reliability (as those are being actively developed in parallel to documentation).

Internal interface modules are listed in [API Internal](#) section.

Note: It is OK for you to use our internal interface (better than than copying our source files!), however, if you do, please pin your dependencies to **middle** version, as backwards-incompatible changes may be introduced in a non-major version.

Furthermore, it would be greatly appreciated if an issue was filed for such situations, so that **b2sdk** interface can be improved in a future version in order to avoid strict version pinning.

Hint: If the current version of **b2sdk** is 4.5.6 and you are using the *internal* interface, put this in your `requirements.txt`:

```
b2sdk>=4.5.6,<4.6.0
```

Hint: Use [Quick Start Guide](#) to quickly jump to examples

2.8 API Reference

2.8.1 Interface types

b2sdk API is divided into two parts, *public* and *internal*. Please pay attention to which interface type you use.

Tip: *Pinning versions* properly ensures the stability of your application.

2.8.2 Public API

B2 Application key

```
class b2sdk.v2.ApplicationKey(key_name, application_key_id, capabilities, account_id,
                               expiration_timestamp_millis=None, bucket_id=None, name_prefix=None,
                               options=None)
```

Dataclass for storing info about an application key returned by delete-key or list-keys.

Parameters

- **key_name** (`str`) –
- **application_key_id** (`str`) –
- **capabilities** (`list[str]`) –
- **account_id** (`str`) –
- **expiration_timestamp_millis** (`Optional[int]`) –
- **bucket_id** (`Optional[str]`) –
- **name_prefix** (`Optional[str]`) –
- **options** (`Optional[list[str]]`) –

```
classmethod from_api_response(response)
```

Create an ApplicationKey object from a delete-key or list-key response (a parsed json object).

Parameters

`response` (`dict`) –

Return type

`ApplicationKey`

```
__init__(key_name, application_key_id, capabilities, account_id, expiration_timestamp_millis=None,
        bucket_id=None, name_prefix=None, options=None)
```

Parameters

- **key_name** (`str`) – name of the key, assigned by user
- **application_key_id** (`str`) – key id, used to authenticate
- **capabilities** (`list[str]`) – list of capabilities assigned to this key
- **account_id** (`str`) – account's id
- **expiration_timestamp_millis** (`Optional[int]`) – expiration time of the key
- **bucket_id** (`Optional[str]`) – if restricted to a bucket, this is the bucket's id

- **name_prefix** (`Optional[str]`) – if restricted to some files, this is their prefix
- **options** (`Optional[list[str]]`) – reserved for future use

as_dict()

Represent the key as a dict, like the one returned by B2 cloud

has_capabilities(capabilities)

checks whether the key has ALL of the given capabilities

Return type
`bool`

classmethod parse_response_dict(response)

Parameters
`response (dict) –`

```
class b2sdk.v2.FullApplicationKey(key_name, application_key_id, application_key, capabilities,
                                    account_id, expiration_timestamp_millis=None, bucket_id=None,
                                    name_prefix=None, options=None)
```

Dataclass for storing info about an application key, including the actual key, as returned by create-key.

Parameters

- **key_name** (`str`) –
- **application_key_id** (`str`) –
- **application_key** (`str`) –
- **capabilities** (`list[str]`) –
- **account_id** (`str`) –
- **expiration_timestamp_millis** (`Optional[int]`) –
- **bucket_id** (`Optional[str]`) –
- **name_prefix** (`Optional[str]`) –
- **options** (`Optional[list[str]]`) –

```
__init__(key_name, application_key_id, application_key, capabilities, account_id,
        expiration_timestamp_millis=None, bucket_id=None, name_prefix=None, options=None)
```

Parameters

- **key_name** (`str`) – name of the key, assigned by user
- **application_key_id** (`str`) – key id, used to authenticate
- **application_key** (`str`) – the actual secret key
- **capabilities** (`list[str]`) – list of capabilities assigned to this key
- **account_id** (`str`) – account's id
- **expiration_timestamp_millis** (`Optional[int]`) – expiration time of the key
- **bucket_id** (`Optional[str]`) – if restricted to a bucket, this is the bucket's id
- **name_prefix** (`Optional[str]`) – if restricted to some files, this is their prefix
- **options** (`Optional[list[str]]`) – reserved for future use

```
classmethod from_create_response(response)
```

Create a FullApplicationKey object from a create-key response (a parsed json object).

Parameters

`response (dict) –`

Return type

`FullApplicationKey`

```
classmethod parse_response_dict(response)
```

Parameters

`response (dict) –`

`as_dict()`

Represent the key as a dict, like the one returned by B2 cloud

`has_capabilities(capabilities)`

checks whether the key has ALL of the given capabilities

Return type

`bool`

AccountInfo

AccountInfo stores basic information about the account, such as *Application Key ID* and *Application Key*, in order to let `b2sdk.v2.B2Api` perform authenticated requests.

There are two usable implementations provided by `b2sdk`:

- `b2sdk.v2.InMemoryAccountInfo` - a basic implementation with no persistence
- `b2sdk.v2.SqliteAccountInfo` - for console and GUI applications

They both provide the full *AccountInfo interface*.

Note: Backup applications and many server-side applications should *implement their own AccountInfo*, backed by the metadata/configuration database of the application.

AccountInfo implementations

InMemoryAccountInfo

AccountInfo with no persistence.

`class b2sdk.v2.InMemoryAccountInfo`

AccountInfo which keeps all data in memory.

Implements all methods of *AccountInfo interface*.

Hint: Usage of this class is appropriate for secure Web applications which do not wish to persist any user data.

Using this class for applications such as CLI, GUI or backup is discouraged, as `InMemoryAccountInfo` does not write down the authorization token persistently. That would be slow, as it would force the application to retrieve a new one on every command/click/backup start. Furthermore - an important property of *AccountInfo* is

caching the `bucket_name:bucket_id` mapping; in case of `InMemoryAccountInfo` the cache will be flushed between executions of the program.

`__init__()`

The constructor takes no parameters.

`SqliteAccountInfo`

```
class b2sdk.v2.SqliteAccountInfo(file_name=None, last_upgrade_to_run=None, profile=None)
```

Store account information in an `sqlite3` database which is used to manage concurrent access to the data.

The `update_done` table tracks the schema updates that have been completed.


Parameters

`profile` (`Optional[str]`) –

Implements all methods of *AccountInfo interface*.

Uses a `SQLite database` for persistence and access synchronization between multiple processes. Not suitable for usage over NFS.

Underlying database has the following schema:

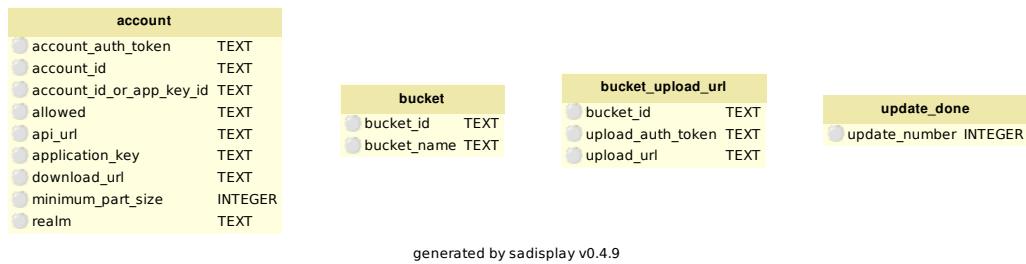

Hint: Usage of this class is appropriate for interactive applications installed on a user's machine (i.e.: CLI and GUI applications).

Usage of this class **might** be appropriate for non-interactive applications installed on the user's machine, such as backup applications. An alternative approach that should be considered is to store the *AccountInfo* data alongside the configuration of the rest of the application.

`__init__()` (`file_name=None, last_upgrade_to_run=None, profile=None`)

Initialize `SqliteAccountInfo`.

The exact algorithm used to determine the location of the database file is not API in any sense. If the location of the database file is required (for cleanup, etc), do not assume a specific resolution: instead, use `self.filename` to get the actual resolved location.

`SqliteAccountInfo` currently checks locations in the following order:

If `profile` arg is provided:

- `~/.b2db-{profile}.sqlite` if it already exists
- `$XDG_CONFIG_HOME/b2/db-<profile>.sqlite` on XDG-compatible OSes (Linux, BSD)

- `~/.b2db-{profile}.sqlite`

Otherwise:

- `file_name`, if truthy
- `B2_ACCOUNT_INFO` env var's value, if set
- `~/.b2_account_info`, if it already exists
- `$XDG_CONFIG_HOME/b2/account_info` on XDG-compatible OSes (Linux, BSD)
- `~/.b2_account_info`, as default

If the directory `$XDG_CONFIG_HOME/b2` does not exist (and is needed), it is created.

Parameters

- `file_name` (`str`) – The sqlite file to use; overrides the default.
- `last_upgrade_to_run` (`int`) – For testing only, override the auto-update on the db.
- `profile` (`Optional[str]`) –

`classmethod get_user_account_info_path(file_name=None, profile=None)`

Parameters

- `file_name` (`Optional[str]`) –
- `profile` (`Optional[str]`) –

`clear()`

Remove all info about accounts and buckets.

`set_auth_data_with_schema_0_for_test(account_id, auth_token, api_url, download_url, minimum_part_size, application_key, realm)`

Set authentication data for tests.

Parameters

- `account_id` (`str`) – an account ID
- `auth_token` (`str`) – an authentication token
- `api_url` (`str`) – an API URL
- `download_url` (`str`) – a download URL
- `minimum_part_size` (`int`) – a minimum part size
- `application_key` (`str`) – an application key
- `realm` (`str`) – a realm to authorize account in

`get_application_key()`

Return `application_key` or raises `MissingAccountData` exception.

Return type

`str`

`get_account_id()`

Return account ID or raises `MissingAccountData` exception.

Return type

`str`

get_application_key_id()

Return an application key ID. The ‘account_id_or_app_key_id’ column was not in the original schema, so it may be NULL.

Nota bene - this is the only place where we are not renaming account_id_or_app_key_id to application_key_id because it requires a column change.

application_key_id == account_id_or_app_key_id

Return type

str

get_api_url()

Return api_url or raises MissingAccountData exception.

Return type

str

get_account_auth_token()

Return account_auth_token or raises MissingAccountData exception.

Return type

str

get_download_url()

Return download_url or raises MissingAccountData exception.

Return type

str

get_realm()

Return realm or raises MissingAccountData exception.

Return type

str

get_recommended_part_size()

Return the recommended number of bytes in a part of a large file.

Returns

number of bytes

Return type

int

get_absolute_minimum_part_size()

Return the absolute minimum number of bytes in a part of a large file.

Returns

number of bytes

Return type

int

get_allowed()

Return ‘allowed’ dictionary info. Example:

```
{
    "bucketId": null,
    "bucketName": null,
```

(continues on next page)

(continued from previous page)

```
"capabilities": [
    "listKeys",
    "writeKeys"
],
"namePrefix": null
}
```

The ‘allowed’ column was not in the original schema, so it may be NULL.

Return type

dict

get_s3_api_url()

Return s3_api_url or raises MissingAccountData exception.

Return type

str

refresh_entire_bucket_name_cache(name_id_iterable)

Remove all previous name-to-id mappings and stores new ones.

Parameters

name_id_iterable (iterable) – an iterable of tuples of the form (name, id)

save_bucket(bucket)

Remember the ID for the given bucket name.

Parameters

bucket (`b2sdk.v2.Bucket`) – a Bucket object

remove_bucket_name(bucket_name)

Remove one entry from the bucket name cache.

Parameters

bucket_name (str) – a bucket name

get_bucket_id_or_none_from_bucket_name(bucket_name)

Look up the bucket ID for the given bucket name.

Parameters

bucket_name (str) – a bucket name

Return bucket ID or None

Return type

str, None

get_bucket_name_or_none_from_bucket_id(bucket_id)

Look up the bucket name for the given bucket id.

Parameters

bucket_id (str) –

Return type

Optional[str]

list_bucket_names_ids()

List buckets in the cache.

Return type

list[tuple[str, str]]

Returns

list of tuples (bucket_name, bucket_id)

BUCKET_UPLOAD_POOL_CLASS

alias of [UploadUrlPool](#)

```
DEFAULT_ALLOWED = {'bucketId': None, 'bucketName': None, 'capabilities':
['listKeys', 'writeKeys', 'deleteKeys', 'listBuckets', 'listAllBucketNames',
'readBuckets', 'writeBuckets', 'deleteBuckets', 'readBucketEncryption',
'writeBucketEncryption', 'readBucketRetentions', 'writeBucketRetentions',
'readFileRetentions', 'writeFileRetentions', 'readFileLegalHolds',
'writeFileLegalHolds', 'readBucketReplications', 'writeBucketReplications',
'bypassGovernance', 'listFiles', 'readFiles', 'shareFiles', 'writeFiles',
'deleteFiles', 'readBucketNotifications', 'writeBucketNotifications'], 'namePrefix':
None}
```

LARGE_FILE_UPLOAD_POOL_CLASS

alias of [UploadUrlPool](#)

classmethod all_capabilities()

Return a list of all possible capabilities.

Return type

list

classmethod allowed_is_valid(allowed)

Make sure that all of the required fields are present, and that bucketId is set if bucketName is.

If the bucketId is for a bucket that no longer exists, or the capabilities do not allow for listBuckets, then we will not have a bucketName.

Parameters

allowed (`dict`) – the structure to use for old account info that was saved without ‘allowed’

Return type

bool

clear_bucket_upload_data(bucket_id)

Remove all upload URLs for the given bucket.

Parameters

bucket_id (`str`) – a bucket ID

clear_large_file_upload_urls(file_id)

Clear the pool of URLs for a given file ID.

Parameters

file_id (`str`) – a file ID

is_master_key()**Return type**

bool

is_same_account(account_id, realm)

Check whether cached account is the same as the one provided.

Parameters

- **account_id** (`str`) – account ID

- **realm** (`str`) – authorization realm
 - **account_id** –
 - **realm** –

Return type

bool

is_same_key(*application_key_id*, *realm*)

Check whether cached application key is the same as the one provided.

Parameters

- **application_key_id** (*str*) – application key ID
 - **realm** (*str*) – authorization realm

Return type

bool

put_bucket_upload_url(*bucket_id*, *upload_url*, *upload_auth_token*)

Add an (`upload_url`, `upload_auth_token`) pair to the pool available for the bucket.

Parameters

- **bucket_id** (*str*) – a bucket ID
 - **upload_url** (*str*) – an upload URL
 - **upload_auth_token** (*str*) – an upload authentication token

Return type

tuple

put_large_file_upload_url(*file_id*, *upload_url*, *upload_auth_token*)

Put a large file upload URL into a pool.

Parameters

- **file_id** (*str*) – a file ID
 - **upload_url** (*str*) – an upload URL
 - **upload_auth_token** (*str*) – an upload authentication token

set_auth_data(*account_id*, *auth_token*, *api_url*, *download_url*, *recommended_part_size*,
absolute_minimum_part_size, *application_key*, *realm*, *s3_api_url*, *allowed*,
application_key_id)

Check permission correctness and stores the results of b2_authorize account.

The allowed structure is the one returned by `b2_authorize_account`, e.g.

```
{  
  "absoluteMinimumPartSize": 5000000,  
  "accountId": "YOUR_ACCOUNT_ID",  
  "allowed": {  
    "bucketId": "BUCKET_ID",  
    "bucketName": "BUCKET_NAME",  
    "capabilities": [  
      "listBuckets",  
      "listFiles",  
      "readFiles",  
    ]  
  }  
}
```

(continues on next page)

(continued from previous page)

```

    "shareFiles",
    "writeFiles",
    "deleteFiles"
],
  "namePrefix": null
},
"apiUrl": "https://apiNNN.backblazeb2.com",
"authorizationToken": "4_0022623512fc8f80000000001_0186e431_d18d02_acct_",
  ↵tH7VW03boeb0XayIc43-sxptpfA=",
"downloadUrl": "https://f002.backblazeb2.com",
"recommendedPartSize": 1000000000,
"s3ApiUrl": "https://s3.us-west-NNN.backblazeb2.com"
}

```

For keys with bucket restrictions, the name of the bucket is looked up and stored as well. The `console_tool` does everything by bucket name, so it's convenient to have the restricted bucket name handy.

Parameters

- `account_id` (`str`) – user account ID
- `auth_token` (`str`) – user authentication token
- `api_url` (`str`) – an API URL
- `download_url` (`str`) – path download URL
- `recommended_part_size` (`int`) – recommended size of a file part
- `absolute_minimum_part_size` (`int`) – minimum size of a file part
- `application_key` (`str`) – application key
- `realm` (`str`) – a realm to authorize account in
- `allowed` (`dict`) – the structure to use for old account info that was saved without ‘allowed’
- `application_key_id` (`str`) – application key ID
- `s3_api_url` (`str`) – S3-compatible API URL

Changed in version 0.1.5: `account_id_or_app_key_id` renamed to `application_key_id`

`take_bucket_upload_url(bucket_id)`

Return a pair (`upload_url`, `upload_auth_token`) that has been removed from the pool for this bucket, or (`None`, `None`) if there are no more left.

Parameters

`bucket_id` (`str`) – a bucket ID

Return type

`tuple`

`take_large_file_upload_url(file_id)`

Take the chosen large file upload URL from the pool.

Parameters

`file_id` (`str`) – a file ID

Implementing your own

When building a server-side application or a web service, you might want to implement your own *AccountInfo* class backed by a database. In such case, you should inherit from `b2sdk.v2.UrlPoolAccountInfo`, which has groundwork for url pool functionality). If you cannot use it, inherit directly from `b2sdk.v2.AbstractAccountInfo`.

```
>>> from b2sdk.v2 import UrlPoolAccountInfo
>>> class MyAccountInfo(UrlPoolAccountInfo):
    ...
```

`b2sdk.v2.AbstractAccountInfo` describes the interface, while `b2sdk.v2.UrlPoolAccountInfo` and `b2sdk.v2.UploadUrlPool` implement a part of the interface for in-memory upload token management.

AccountInfo interface

```
class b2sdk.v2.AbstractAccountInfo
```

```
    list_bucket_names_ids()
```

List buckets in the cache.

Returns

list of tuples (bucket_name, bucket_id)

```
    DEFAULT_ALLOWED = {'bucketId': None, 'bucketName': None, 'capabilities':
        ['listKeys', 'writeKeys', 'deleteKeys', 'listBuckets', 'listAllBucketNames',
        'readBuckets', 'writeBuckets', 'deleteBuckets', 'readBucketEncryption',
        'writeBucketEncryption', 'readBucketRetentions', 'writeBucketRetentions',
        'readFileRetentions', 'writeFileRetentions', 'readFileLegalHolds',
        'writeFileLegalHolds', 'readBucketReplications', 'writeBucketReplications',
        'bypassGovernance', 'listFiles', 'readFiles', 'shareFiles', 'writeFiles',
        'deleteFiles', 'readBucketNotifications', 'writeBucketNotifications'],
        'namePrefix': None}
```

```
    _abc_impl = <_abc_.abc_data object>
```

```
    abstract _set_auth_data(account_id, auth_token, api_url, download_url, recommended_part_size,
        absolute_minimum_part_size, application_key, realm, s3_api_url, allowed,
        application_key_id)
```

Actually store the auth data. Can assume that ‘allowed’ is present and valid.

All of the information returned by `b2_authorize_account` is saved, because all of it is needed at some point.

```
    classmethod all_capabilities()
```

Return a list of all possible capabilities.

Return type

list

```
    classmethod allowed_is_valid(allowed)
```

Make sure that all of the required fields are present, and that bucketId is set if bucketName is.

If the bucketId is for a bucket that no longer exists, or the capabilities do not allow for listBuckets, then we will not have a bucketName.

Parameters

`allowed` (`dict`) – the structure to use for old account info that was saved without ‘allowed’

Return type
bool

abstract clear()
Remove all stored information.

abstract clear_bucket_upload_data(bucket_id)
Remove all upload URLs for the given bucket.

Parameters
`bucket_id` (`str`) – a bucket ID

abstract clear_large_file_upload_urls(file_id)
Clear the pool of URLs for a given file ID.

Parameters
`file_id` (`str`) – a file ID

abstract get_absolute_minimum_part_size()
Return the absolute minimum number of bytes in a part of a large file.

Returns
number of bytes

Return type
`int`

abstract get_account_auth_token()
Return account_auth_token or raises `MissingAccountData` exception.

Return type
`str`

abstract get_account_id()
Return account ID or raises `MissingAccountData` exception.

Return type
`str`

abstract get_allowed()
An ‘allowed’ dict, as returned by `b2_authorize_account`. Never `None`; for account info that was saved before ‘allowed’ existed, returns `DEFAULT_ALLOWED`.

Return type
`dict`

abstract get_api_url()
Return api_url or raises `MissingAccountData` exception.

Return type
`str`

abstract get_application_key()
Return application_key or raises `MissingAccountData` exception.

Return type
`str`

abstract get_application_key_id()
Return the application key ID used to authenticate.

Return type

str

abstract get_bucket_id_or_none_from_bucket_name(bucket_name)

Look up the bucket ID for the given bucket name.

Parameters

bucket_name (str) – a bucket name

Return bucket ID or None

Return type

str, None

abstract get_bucket_name_or_none_from_bucket_id(bucket_id)

Look up the bucket name for the given bucket id.

Parameters

bucket_id (str) –

Return type

Optional[str]

abstract get_download_url()

Return download_url or raises MissingAccountData exception.

Return type

str

abstract get_realm()

Return realm or raises MissingAccountData exception.

Return type

str

abstract get_recommended_part_size()

Return the recommended number of bytes in a part of a large file.

Returns

number of bytes

Return type

int

abstract get_s3_api_url()

Return s3_api_url or raises MissingAccountData exception.

Return type

str

is_master_key()

Return type

bool

is_same_account(account_id, realm)

Check whether cached account is the same as the one provided.

Parameters

- account_id (str) – account ID
- realm (str) – authorization realm

- `account_id` –
- `realm` –

Return type
`bool`

is_same_key(*application_key_id*, *realm*)

Check whether cached application key is the same as the one provided.

Parameters

- `application_key_id` (`str`) – application key ID
- `realm` (`str`) – authorization realm

Return type
`bool`

abstract put_bucket_upload_url(*bucket_id*, *upload_url*, *upload_auth_token*)

Add an (*upload_url*, *upload_auth_token*) pair to the pool available for the bucket.

Parameters

- `bucket_id` (`str`) – a bucket ID
- `upload_url` (`str`) – an upload URL
- `upload_auth_token` (`str`) – an upload authentication token

Return type
`tuple`

abstract put_large_file_upload_url(*file_id*, *upload_url*, *upload_auth_token*)

Put a large file upload URL into a pool.

Parameters

- `file_id` (`str`) – a file ID
- `upload_url` (`str`) – an upload URL
- `upload_auth_token` (`str`) – an upload authentication token

abstract refresh_entire_bucket_name_cache(*name_id_iterable*)

Remove all previous name-to-id mappings and stores new ones.

Parameters

`name_id_iterable` (`iterable`) – an iterable of tuples of the form (name, id)

abstract remove_bucket_name(*bucket_name*)

Remove one entry from the bucket name cache.

Parameters

`bucket_name` (`str`) – a bucket name

abstract save_bucket(*bucket*)

Remember the ID for the given bucket name.

Parameters

`bucket` (`b2sdk.v2.Bucket`) – a Bucket object

```
set_auth_data(account_id, auth_token, api_url, download_url, recommended_part_size,
              absolute_minimum_part_size, application_key, realm, s3_api_url, allowed,
              application_key_id)
```

Check permission correctness and stores the results of b2_authorize_account.

The allowed structure is the one returned by b2_authorize_account, e.g.

```
{
    "absoluteMinimumPartSize": 5000000,
    "accountId": "YOUR_ACCOUNT_ID",
    "allowed": {
        "bucketId": "BUCKET_ID",
        "bucketName": "BUCKET_NAME",
        "capabilities": [
            "listBuckets",
            "listFiles",
            "readFiles",
            "shareFiles",
            "writeFiles",
            "deleteFiles"
        ],
        "namePrefix": null
    },
    "apiUrl": "https://apiNNN.backblazeb2.com",
    "authorizationToken": "4_0022623512fc8f80000000001_0186e431_d18d02_acct_
    ↵tH7VW03boeb0XayIc43-sxptpfA=",
    "downloadUrl": "https://f002.backblazeb2.com",
    "recommendedPartSize": 100000000,
    "s3ApiUrl": "https://s3.us-west-NNN.backblazeb2.com"
}
```

For keys with bucket restrictions, the name of the bucket is looked up and stored as well. The console_tool does everything by bucket name, so it's convenient to have the restricted bucket name handy.

Parameters

- **account_id** (*str*) – user account ID
- **auth_token** (*str*) – user authentication token
- **api_url** (*str*) – an API URL
- **download_url** (*str*) – path download URL
- **recommended_part_size** (*int*) – recommended size of a file part
- **absolute_minimum_part_size** (*int*) – minimum size of a file part
- **application_key** (*str*) – application key
- **realm** (*str*) – a realm to authorize account in
- **allowed** (*dict*) – the structure to use for old account info that was saved without ‘allowed’
- **application_key_id** (*str*) – application key ID
- **s3_api_url** (*str*) – S3-compatible API URL

Changed in version 0.1.5: *account_id_or_app_key_id* renamed to *application_key_id*

abstract `take_bucket_upload_url(bucket_id)`

Return a pair (upload_url, upload_auth_token) that has been removed from the pool for this bucket, or (None, None) if there are no more left.

Parameters

`bucket_id` (`str`) – a bucket ID

Return type

`tuple`

abstract `take_large_file_upload_url(file_id)`

Take the chosen large file upload URL from the pool.

Parameters

`file_id` (`str`) – a file ID

AccountInfo helper classes

class `b2sdk.v2.UrlPoolAccountInfo`

Implement part of `AbstractAccountInfo` for upload URL pool management with a simple, key-value storage, such as `b2sdk.v2.UploadUrlPool`.

Caution: This class is not part of the public interface. To find out how to safely use it, read [this](#).

`BUCKET_UPLOAD_POOL_CLASS`

alias of `UploadUrlPool`

`LARGE_FILE_UPLOAD_POOL_CLASS`

alias of `UploadUrlPool`

abstract `clear()`

Remove all stored information.

put_bucket_upload_url(bucket_id, upload_url, upload_auth_token)

Add an (upload_url, upload_auth_token) pair to the pool available for the bucket.

Parameters

- `bucket_id` (`str`) – a bucket ID
- `upload_url` (`str`) – an upload URL
- `upload_auth_token` (`str`) – an upload authentication token

Return type

`tuple`

clear_bucket_upload_data(bucket_id)

Remove all upload URLs for the given bucket.

Parameters

`bucket_id` (`str`) – a bucket ID

take_bucket_upload_url(bucket_id)

Return a pair (upload_url, upload_auth_token) that has been removed from the pool for this bucket, or (None, None) if there are no more left.

Parameters

bucket_id (*str*) – a bucket ID

Return type

tuple

put_large_file_upload_url(*file_id, upload_url, upload_auth_token*)

Put a large file upload URL into a pool.

Parameters

- **file_id** (*str*) – a file ID
- **upload_url** (*str*) – an upload URL
- **upload_auth_token** (*str*) – an upload authentication token

take_large_file_upload_url(*file_id*)

Take the chosen large file upload URL from the pool.

Parameters

file_id (*str*) – a file ID

clear_large_file_upload_urls(*file_id*)

Clear the pool of URLs for a given file ID.

Parameters

file_id (*str*) – a file ID

```
DEFAULT_ALLOWED = {'bucketId': None, 'bucketName': None, 'capabilities': ['listKeys', 'writeKeys', 'deleteKeys', 'listBuckets', 'listAllBucketNames', 'readBuckets', 'writeBuckets', 'deleteBuckets', 'readBucketEncryption', 'writeBucketEncryption', 'readBucketRetentions', 'writeBucketRetentions', 'readFileRetentions', 'writeFileRetentions', 'readFileLegalHolds', 'writeFileLegalHolds', 'readBucketReplications', 'writeBucketReplications', 'bypassGovernance', 'listFiles', 'readFiles', 'shareFiles', 'writeFiles', 'deleteFiles', 'readBucketNotifications', 'writeBucketNotifications'], 'namePrefix': None}
```

classmethod all_capabilities()

Return a list of all possible capabilities.

Return type

list

classmethod allowed_is_valid(*allowed*)

Make sure that all of the required fields are present, and that bucketId is set if bucketName is.

If the bucketId is for a bucket that no longer exists, or the capabilities do not allow for listBuckets, then we will not have a bucketName.

Parameters

allowed (*dict*) – the structure to use for old account info that was saved without ‘allowed’

Return type

bool

abstract get_absolute_minimum_part_size()

Return the absolute minimum number of bytes in a part of a large file.

Returns

number of bytes

Return type`int`**abstract get_account_auth_token()**

Return account_auth_token or raises `MissingAccountData` exception.

Return type`str`**abstract get_account_id()**

Return account ID or raises `MissingAccountData` exception.

Return type`str`**abstract get_allowed()**

An ‘allowed’ dict, as returned by `b2_authorize_account`. Never `None`; for account info that was saved before ‘allowed’ existed, returns `DEFAULT_ALLOWED`.

Return type`dict`**abstract get_api_url()**

Return api_url or raises `MissingAccountData` exception.

Return type`str`**abstract get_application_key()**

Return application_key or raises `MissingAccountData` exception.

Return type`str`**abstract get_application_key_id()**

Return the application key ID used to authenticate.

Return type`str`**abstract get_bucket_id_or_none_from_bucket_name(bucket_name)**

Look up the bucket ID for the given bucket name.

Parameters`bucket_name` (`str`) – a bucket name**Return bucket ID or None****Return type**`str, None`**abstract get_bucket_name_or_none_from_bucket_id(bucket_id)**

Look up the bucket name for the given bucket id.

Parameters`bucket_id` (`str`) –**Return type**`Optional[str]`

abstract get_download_url()
Return download_url or raises MissingAccountData exception.

Return type
`str`

abstract get_realm()
Return realm or raises MissingAccountData exception.

Return type
`str`

abstract get_recommended_part_size()
Return the recommended number of bytes in a part of a large file.

Returns
number of bytes

Return type
`int`

abstract get_s3_api_url()
Return s3_api_url or raises MissingAccountData exception.

Return type
`str`

is_master_key()

Return type
`bool`

is_same_account(*account_id*, *realm*)

Check whether cached account is the same as the one provided.

Parameters

- **account_id** (`str`) – account ID
- **realm** (`str`) – authorization realm
- **account_id** –
- **realm** –

Return type
`bool`

is_same_key(*application_key_id*, *realm*)

Check whether cached application key is the same as the one provided.

Parameters

- **application_key_id** (`str`) – application key ID
- **realm** (`str`) – authorization realm

Return type
`bool`

abstract list_bucket_names_ids()

List buckets in the cache.

Return type`list[tuple[str, str]]`**Returns**

list of tuples (bucket_name, bucket_id)

abstract refresh_entire_bucket_name_cache(name_id_iterable)

Remove all previous name-to-id mappings and stores new ones.

Parameters`name_id_iterable (iterable) – an iterable of tuples of the form (name, id)`**abstract remove_bucket_name(bucket_name)**

Remove one entry from the bucket name cache.

Parameters`bucket_name (str) – a bucket name`**abstract save_bucket(bucket)**

Remember the ID for the given bucket name.

Parameters`bucket (b2sdk.v2.Bucket) – a Bucket object`**set_auth_data(account_id, auth_token, api_url, download_url, recommended_part_size, absolute_minimum_part_size, application_key, realm, s3_api_url, allowed, application_key_id)**Check permission correctness and stores the results of `b2_authorize_account`.The allowed structure is the one returned by `b2_authorize_account`, e.g.

```
{
    "absoluteMinimumPartSize": 5000000,
    "accountId": "YOUR_ACCOUNT_ID",
    "allowed": {
        "bucketId": "BUCKET_ID",
        "bucketName": "BUCKET_NAME",
        "capabilities": [
            "listBuckets",
            "listFiles",
            "readFiles",
            "shareFiles",
            "writeFiles",
            "deleteFiles"
        ],
        "namePrefix": null
    },
    "apiUrl": "https://apiNNN.backblazeb2.com",
    "authorizationToken": "4_0022623512fc8f80000000001_0186e431_d18d02_acct_
    ↪tH7VW03boeb0XayIc43-sxptpfA=",
    "downloadUrl": "https://f002.backblazeb2.com",
    "recommendedPartSize": 100000000,
    "s3ApiUrl": "https://s3.us-west-NNN.backblazeb2.com"
}
```

For keys with bucket restrictions, the name of the bucket is looked up and stored as well. The `console_tool` does everything by bucket name, so it's convenient to have the restricted bucket name handy.

Parameters

- **account_id** (*str*) – user account ID
- **auth_token** (*str*) – user authentication token
- **api_url** (*str*) – an API URL
- **download_url** (*str*) – path download URL
- **recommended_part_size** (*int*) – recommended size of a file part
- **absolute_minimum_part_size** (*int*) – minimum size of a file part
- **application_key** (*str*) – application key
- **realm** (*str*) – a realm to authorize account in
- **allowed** (*dict*) – the structure to use for old account info that was saved without ‘allowed’
- **application_key_id** (*str*) – application key ID
- **s3_api_url** (*str*) – S3-compatible API URL

Changed in version 0.1.5: *account_id_or_app_key_id* renamed to *application_key_id*

class b2sdk._internal.account_info.upload_url_pool.UploadUrlPool

For each key (either a bucket id or large file id), hold a pool of (url, auth_token) pairs.

Caution: This class is not part of the public interface. To find out how to safely use it, read [this](#).

put(key, url, auth_token)

Add the url and auth token to the pool for the given key.

Parameters

- **key** (*str*) – bucket ID or large file ID
- **url** (*str*) – bucket or file URL
- **auth_token** (*str*) – authentication token

take(key)

Return a (url, auth_token) if one is available, or (None, None) if not.

Parameters

key (*str*) – bucket ID or large file ID

Return type

tuple

clear_for_key(key)

Remove an item from the pool by key.

Parameters

key (*str*) – bucket ID or large file ID

Cache

b2sdk caches the mapping between bucket name and bucket id, so that the user of the library does not need to maintain the mapping to call the api.

```
class b2sdk.v2.AbstractCache
```

`clear()`

`abstract get_bucket_id_or_none_from_bucket_name(name)`

`abstract get_bucket_name_or_none_from_allowed()`

`abstract get_bucket_name_or_none_from_bucket_id(bucket_id)`

Parameters

`bucket_id (str) –`

Return type

`Optional[str]`

`abstract list_bucket_names_ids()`

List buckets in the cache.

Return type

`list[tuple[str, str]]`

Returns

list of tuples (bucket_name, bucket_id)

`abstract save_bucket(bucket)`

`abstract set_bucket_name_cache(buckets)`

```
class b2sdk.v2.AuthInfoCache(info)
```

A cache that stores data persistently in StoredAccountInfo.

Parameters

`info (AbstractAccountInfo) –`

`__init__(info)`

Parameters

`info (AbstractAccountInfo) –`

`get_bucket_id_or_none_from_bucket_name(name)`

`get_bucket_name_or_none_from_bucket_id(bucket_id)`

Return type

`Optional[str]`

`get_bucket_name_or_none_from_allowed()`

`list_bucket_names_ids()`

List buckets in the cache.

Return type

`list[tuple[str, str]]`

Returns

list of tuples (bucket_name, bucket_id)

```
save_bucket(bucket)
set_bucket_name_cache(buckets)
clear()

class b2sdk.v2.DummyCache
    A cache that does nothing.

    get_bucket_id_or_none_from_bucket_name(name)
    get_bucket_name_or_none_from_bucket_id(bucket_id)

        Parameters
            bucket_id (str) –

        Return type
            Optional[str]

        get_bucket_name_or_none_from_allowed()

        list_bucket_names_ids()
            List buckets in the cache.

        Returns
            list of tuples (bucket_name, bucket_id)

        save_bucket(bucket)
        set_bucket_name_cache(buckets)
        clear()

class b2sdk.v2.InMemoryCache
    A cache that stores the information in memory.

    __init__()

    get_bucket_id_or_none_from_bucket_name(name)
    get_bucket_name_or_none_from_bucket_id(bucket_id)

        Parameters
            bucket_id (str) –

        Return type
            Optional[str]

        get_bucket_name_or_none_from_allowed()

        list_bucket_names_ids()
            List buckets in the cache.

        Returns
            list of tuples (bucket_name, bucket_id)
```

```
save_bucket(bucket)
set_bucket_name_cache(buckets)
clear()
```

B2 Api client

```
class b2sdk.v2.B2Api

    SESSION_CLASS
        alias of B2Session

    BUCKET_CLASS
        alias of Bucket

    BUCKET_FACTORY_CLASS
        alias of BucketFactory

    SERVICES_CLASS
        alias of Services

    FILE_VERSION_FACTORY_CLASS
        alias of FileVersionFactory

    __init__(*args, **kwargs)
        Initialize the API using the given account info.
```

Parameters

- **account_info** – To learn more about Account Info objects, see here [SqliteAccountInfo](#)
- **cache** – It is used by B2Api to cache the mapping between bucket name and bucket ids. default is [DummyCache](#)
- **max_upload_workers** – a number of upload threads
- **max_copy_workers** – a number of copy threads
- **api_config** –
- **max_download_workers** – maximum number of download threads
- **save_to_buffer_size** – buffer size to use when writing files using Downloaded-File.save_to
- **check_download_hash** – whether to check hash of downloaded files. Can be disabled for files with internal checksums, for example, or to forcefully retrieve objects with corrupted payload or hash value
- **max_download_streams_per_file** – number of streams for parallel download manager

get_bucket_by_id(bucket_id)

Return the Bucket matching the given bucket_id. :raises b2sdk.v2.exception.BucketIdNotFound: if the bucket does not exist in the account

Parameters

bucket_id (`str`) –

Return type

Bucket

authorize_account(realm, application_key_id, application_key)

Perform account authorization.

Parameters

- **application_key_id** (`str`) – *application key ID*
- **application_key** (`str`) – user’s *application key*
- **realm** (`str`) – a realm to authorize account in (usually just “production”)

DEFAULT_LIST_KEY_COUNT = 1000

DOWNLOAD_VERSION_FACTORY_CLASS

alias of DownloadVersionFactory

property account_info

authorize_automatically()

Perform automatic account authorization, retrieving all account data from account info object passed during initialization.

property cache

cancel_large_file(file_id)

Cancel a large file upload.

Parameters

file_id (`str`) –

Return type

`FileIdAndName`

check_bucket_id_restrictions(bucket_id)

Check to see if the allowed field from authorize-account has a bucket restriction.

If it does, checks if the bucket_id for a given api call matches that. If not, it raises a `b2sdk.v2.exception.RestrictedBucket` error.

Raises

`b2sdk.v2.exception.RestrictedBucket` – if the account is not allowed to use this bucket

Parameters

bucket_id (`str`) –

check_bucket_name_restrictions(bucket_name)

Check to see if the allowed field from authorize-account has a bucket restriction.

If it does, checks if the bucket_name for a given api call matches that. If not, it raises a `b2sdk.v2.exception.RestrictedBucket` error.

Raises

`b2sdk.v2.exception.RestrictedBucket` – if the account is not allowed to use this bucket

Parameters

bucket_name (`str`) –

```
create_bucket(name, bucket_type, bucket_info=None, cors_rules=None, lifecycle_rules=None,
              default_server_side_encryption=None, is_file_lock_enabled=None, replication=None)
```

Create a bucket.

Parameters

- **name** (`str`) – bucket name
- **bucket_type** (`str`) – a bucket type, could be one of the following values: "allPublic", "allPrivate"
- **bucket_info** (`dict`) – additional bucket info to store with the bucket
- **cors_rules** (`dict`) – bucket CORS rules to store with the bucket
- **lifecycle_rules** (`Optional[list[LifecycleRule]]`) – bucket lifecycle rules to store with the bucket
- **default_server_side_encryption** (`Optional[EncryptionSetting]`) – default server side encryption settings (None if unknown)
- **is_file_lock_enabled** (`Optional[bool]`) – boolean value specifies whether bucket is File Lock-enabled
- **replication** (`Optional[ReplicationConfiguration]`) – bucket replication rules or None
- **default_server_side_encryption** –
- **is_file_lock_enabled** –
- **replication** –

Returns

a Bucket object

Return type

`b2sdk.v2.Bucket`

```
create_key(capabilities, key_name, valid_duration_seconds=None, bucket_id=None, name_prefix=None)
```

Create a new *application key*.

Parameters

- **capabilities** (`list[str]`) – a list of capabilities
- **key_name** (`str`) – a name of a key
- **valid_duration_seconds** (`Optional[int]`) – key auto-expire time after it is created, in seconds, or None to not expire
- **bucket_id** (`Optional[str]`) – a bucket ID to restrict the key to, or None to not restrict
- **name_prefix** (`Optional[str]`) – a remote filename prefix to restrict the key to or None to not restrict

Return type

`FullApplicationKey`

```
delete_bucket(bucket)
```

Delete a chosen bucket.

Parameters

bucket (`b2sdk.v2.Bucket`) – a *bucket* to delete

Return type

None

delete_file_version(file_id, file_name, bypass_governance=False)

Permanently and irrevocably delete one version of a file. bypass_governance must be set to true if deleting a file version protected by Object Lock governance mode retention settings (unless its retention period expired)

Parameters

- **file_id** (`str`) –
- **file_name** (`str`) –
- **bypass_governance** (`bool`) –

Return type

`fileIdAndName`

delete_key(application_key)

Delete *application key*.

Parameters

application_key (`BaseApplicationKey`) – an *application key*

delete_key_by_id(application_key_id)

Delete *application key*.

Parameters

application_key_id (`str`) – an *application key ID*

Return type

`ApplicationKey`

download_file_by_id(file_id, progress_listener=None, range_=None, encryption=None)

Download a file with the given ID.

Parameters

- **file_id** (`str`) – a file ID
- **progress_listener** (`Optional[AbstractProgressListener]`) – a progress listener object to use, or None to not track progress
- **range** – a list of two integers, the first one is a start position, and the second one is the end position in the file
- **encryption** (`Optional[EncryptionSetting]`) – encryption settings (None if unknown)
- **file_id** –
- **range_** (`Optional[tuple[int, int]]`) –

Return type

`DownloadedFile`

get_account_id()

Return the account ID.

Return type

`str`

get_bucket_by_name(*bucket_name*)

Return the Bucket matching the given bucket_name.

Parameters

- **bucket_name** (*str*) – the name of the bucket to return
- **bucket_name** –

Returns

a Bucket object

Return type

b2sdk.v2.Bucket

Raises

b2sdk.v2.exception.NonExistentBucket – if the bucket does not exist in the account

get_download_url_for_file_name(*bucket_name*, *file_name*)

Return a URL to download the given file by name.

Parameters

- **bucket_name** (*str*) – a bucket name
- **file_name** (*str*) – a file name

get_download_url_for_fileid(*file_id*)

Return a URL to download the given file by ID.

Parameters

file_id (*str*) – a file ID

get_file_info(*file_id*)

Gets info about file version.

Parameters

- **file_id** (*str*) – the id of the file whose info will be retrieved.
- **file_id** –

Return type

FileVersion

get_file_info_by_name(*bucket_name*, *file_name*)

Gets info about a file version. Similar to *get_file_info* but takes the bucket name and file name instead of file id.

Parameters

- **bucket_name** (*str*) – The name of the bucket where the file resides.
- **file_name** (*str*) – The name of the file whose info will be retrieved.
- **bucket_name** –
- **file_name** –

Return type

DownloadVersion

get_key(key_id)
Gets information about a single key: its capabilities, prefix, name etc

Returns *None* if the key does not exist.

Raises an exception if profile is not permitted to list keys.

Parameters

key_id (str) –

Return type

`Optional[ApplicationKey]`

list_buckets(bucket_name=None, bucket_id=None, *, use_cache=False)

Call `b2_list_buckets` and return a list of buckets.

When no bucket name nor ID is specified, returns *all* of the buckets in the account. When a bucket name or ID is given, returns just that bucket. When authorized with an *application key* restricted to one *bucket*, you must specify the bucket name or bucket id, or the request will be unauthorized.

Parameters

- **bucket_name (str)** – the name of the one bucket to return
- **bucket_id (str)** – the ID of the one bucket to return
- **use_cache (bool)** – if True use cached bucket list if available and not empty
- **use_cache –**

Return type

`list[b2sdk.v2.Bucket]`

list_keys(start_application_key_id=None)

List application keys. Lazily perform requests to B2 cloud and return all keys.

Parameters

start_application_key_id (Optional[str]) – an *application key ID* to start from or *None* to start from the beginning

Return type

`Generator[ApplicationKey, None, None]`

list_parts(file_id, start_part_number=None, batch_size=None)

Generator that yields a `b2sdk.v2.Part` for each of the parts that have been uploaded.

Parameters

- **file_id (str)** – the ID of the large file that is not finished
- **start_part_number (int)** – the first part number to return; defaults to the first part
- **batch_size (int)** – the number of parts to fetch at a time from the server

Return type

`generator`

property raw_api

Warning: `B2RawHTTPApi` attribute is deprecated. `B2Session` expose all `B2RawHTTPApi` methods now.

```
update_file_legal_hold(file_id, file_name, legal_hold)
```

Parameters

- **file_id** (`str`) –
- **file_name** (`str`) –
- **legal_hold** (`LegalHold`) –

Return type

`LegalHold`

```
update_file_retention(file_id, file_name, file_retention, bypass_governance=False)
```

Parameters

- **file_id** (`str`) –
- **file_name** (`str`) –
- **file_retention** (`FileRetentionSetting`) –
- **bypass_governance** (`bool`) –

Return type

`FileRetentionSetting`

```
class b2sdk.v2.B2HttpApiConfig(http_session_factory=<class 'requests.sessions.Session'>, install_clock_skew_hook=True, user_agent_append=None, _raw_api_class=None, decode_content=False)
```

Parameters

- **http_session_factory** (`Callable[[], Session]`) –
- **install_clock_skew_hook** (`bool`) –
- **user_agent_append** (`Optional[str]`) –
- **_raw_api_class** (`Optional[type[AbstractRawApi]]`) –
- **decode_content** (`bool`) –

DEFAULT_RAW_API_CLASS

alias of `B2RawHTTPApi`

```
__init__(http_session_factory=<class 'requests.sessions.Session'>, install_clock_skew_hook=True, user_agent_append=None, _raw_api_class=None, decode_content=False)
```

A structure with params to be passed to low level API.

Parameters

- **http_session_factory** (`Callable[[], Session]`) – a callable that returns a `requests.Session` object (or a compatible one)
- **install_clock_skew_hook** (`bool`) – if True, install a clock skew hook
- **user_agent_append** (`Optional[str]`) – if provided, the string will be appended to the User-Agent
- **_raw_api_class** (`Optional[type[AbstractRawApi]]`) – `AbstractRawApi`-compliant class
- **decode_content** (`bool`) – If true, the underlying http backend will try to decode encoded files when downloading, based on the response headers

Exceptions

```
exception b2sdk.v2.exception.BucketIdNotFound(bucket_id)
```

B2 Bucket

```
class b2sdk.v2.Bucket(api, id_, name=None, type_=None, bucket_info=None, cors_rules=None,
                      lifecycle_rules=None, revision=None, bucket_dict=None, options_set=None,
                      default_server_side_encryption=<EncryptionSetting(EncryptionMode.UNKNOWN,
                      None, None)>, default_retention=BucketRetentionSetting('unknown', None),
                      is_file_lock_enabled=None, replication=None)
```

Parameters

- **lifecycle_rules** (`Optional[list[LifecycleRule]]`) –
- **default_server_side_encryption** (`EncryptionSetting`) –
- **default_retention** (`BucketRetentionSetting`) –
- **is_file_lock_enabled** (`Optional[bool]`) –
- **replication** (`Optional[ReplicationConfiguration]`) –

FILE_VERSION_FACTORY_CLASS

alias of `FileVersionFactory`

get_fresh_state()

Fetch all the information about this bucket and return a new bucket object. This method does NOT change the object it is called on.

Return type

`Bucket`

upload_bytes(data_bytes, file_name, content_type=None, file_info=None, progress_listener=None, encryption=None, file_retention=None, legal_hold=None, large_file_sha1=None, custom_upload_timestamp=None, cache_control=None, *args, **kwargs)

Upload bytes in memory to a B2 file.

Parameters

- **data_bytes** (`bytes`) – a byte array to upload
- **file_name** (`str`) – a file name to upload bytes to
- **content_type** (`str, None`) – the MIME type, or `None` to accept the default based on file extension of the B2 file name
- **file_info** (`Optional[dict]`) – a file info to store with the file or `None` to not store anything
- **progress_listener** (`b2sdk.v2.AbstractProgressListener, None`) – a progress listener object to use, or `None` to not track progress
- **encryption** (`Optional[EncryptionSetting]`) – encryption settings (`None` if unknown)
- **file_retention** (`Optional[FileRetentionSetting]`) – file retention setting
- **legal_hold** (`Optional[LegalHold]`) – legal hold setting
- **large_file_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) – SHA-1 hash of the result file or `None` if unknown

- **custom_upload_timestamp** (`Optional[int]`) – override object creation date, expressed as a number of milliseconds since epoch
- **cache_control** (`Optional[str]`) – an optional cache control setting. Syntax based on the section 14.9 of RFC 2616. Example string value: ‘public, max-age=86400, s-maxage=3600, no-transform’.
- **expires** (`str, datetime.datetime, None`) – an optional cache expiration setting. If this argument is a string, its syntax must be based on the section 14.21 of RFC 2616. Example string value: ‘Thu, 01 Dec 2050 16:00:00 GMT’. If this argument is a datetime, it will be converted to a string in the same format.
- **content_disposition** (`str, None`) – an optional content disposition setting. Syntax based on the section 19.5.1 of RFC 2616. Example string value: ‘attachment; filename=”fname.ext”’.
- **content_encoding** (`str, None`) – an optional content encoding setting. Syntax based on the section 14.11 of RFC 2616. Example string value: ‘gzip’.
- **content_language** (`str, None`) – an optional content language setting. Syntax based on the section 14.12 of RFC 2616. Example string value: ‘mi, en_US’.
- **file_info** –
- **encryption** –
- **file_retention** –
- **legal_hold** –
- **large_file_sha1** –
- **custom_upload_timestamp** –
- **cache_control** –

Return type`b2sdk.v2FileVersion`

```
upload_local_file(local_file, file_name, content_type=None, file_info=None, sha1_sum=None,
                  min_part_size=None, progress_listener=None, encryption=None, file_retention=None,
                  legal_hold=None, upload_mode=UploadMode.FULL,
                  custom_upload_timestamp=None, cache_control=None, *args, **kwargs)
```

Upload a file on local disk to a B2 file.

See also:

[Synchronizer](#), a high-performance utility that synchronizes a local folder with a `bucket`.

Parameters

- **local_file** (`str`) – a path to a file on local disk
- **file_name** (`str`) – a file name of the new B2 file
- **content_type** – the MIME type, or `None` to accept the default based on file extension of the B2 file name
- **file_info** (`Optional[dict]`) – a file info to store with the file or `None` to not store anything
- **sha1_sum** – file SHA1 hash or `None` to compute it automatically
- **min_part_size** – lower limit of part size for the transfer planner, in bytes

- **progress_listener** (`b2sdk.v2.AbstractProgressListener`, `None`) – a progress listener object to use, or `None` to not report progress
- **encryption** (`Optional[EncryptionSetting]`) – encryption settings (`None` if unknown)
- **file_retention** (`Optional[FileRetentionSetting]`) – file retention setting
- **legal_hold** (`Optional[LegalHold]`) – legal hold setting
- **upload_mode** (`UploadMode`) – desired upload mode
- **custom_upload_timestamp** (`Optional[int]`) – override object creation date, expressed as a number of milliseconds since epoch
- **cache_control** (`Optional[str]`) – an optional cache control setting. Syntax based on the section 14.9 of RFC 2616. Example string value: ‘public, max-age=86400, s-maxage=3600, no-transform’.
- **expires** (`str`, `datetime.datetime`, `None`) – an optional cache expiration setting. If this argument is a string, its syntax must be based on the section 14.21 of RFC 2616. Example string value: ‘Thu, 01 Dec 2050 16:00:00 GMT’. If this argument is a datetime, it will be converted to a string in the same format.
- **content_disposition** (`str`, `None`) – an optional content disposition setting. Syntax based on the section 19.5.1 of RFC 2616. Example string value: ‘attachment; filename=”fname.ext”’.
- **content_encoding** (`str`, `None`) – an optional content encoding setting. Syntax based on the section 14.11 of RFC 2616. Example string value: ‘gzip’.
- **content_language** (`str`, `None`) – an optional content language setting. Syntax based on the section 14.12 of RFC 2616. Example string value: ‘mi, en_US’.
- **encryption** –
- **file_retention** –
- **legal_hold** –
- **upload_mode** –
- **custom_upload_timestamp** –
- **cache_control** –

Return type`b2sdk.v2FileVersion`

```
DEFAULT_CONTENT_TYPE = 'b2/x-auto'

__init__(api, id_, name=None, type_=None, bucket_info=None, cors_rules=None, lifecycle_rules=None,
         revision=None, bucket_dict=None, options_set=None,
         default_server_side_encryption=<EncryptionSetting(EncryptionMode.UNKNOWN, None,
         None)>, default_retention=BucketRetentionSetting('unknown', None), is_file_lock_enabled=None,
         replication=None)
```

Parameters

- **api** (`b2sdk.v2.B2Api`) – an API object
- **id** (`str`) – a bucket id
- **name** (`str`) – a bucket name
- **type** (`str`) – a bucket type

- **bucket_info** (`dict`) – an info to store with a bucket
- **cors_rules** (`dict`) – CORS rules to store with a bucket
- **lifecycle_rules** (`Optional[list[LifecycleRule]]`) – lifecycle rules of the bucket
- **revision** (`int`) – a bucket revision number
- **bucket_dict** (`dict`) – a dictionary which contains bucket parameters
- **options_set** (`set`) – set of bucket options strings
- **default_server_side_encryption** (`EncryptionSetting`) – default server side encryption settings
- **default_retention** (`BucketRetentionSetting`) – default retention setting
- **is_file_lock_enabled** (`Optional[bool]`) – whether file locking is enabled or not
- **replication** (`Optional[ReplicationConfiguration]`) – replication rules for the bucket
- **default_server_side_encryption** –
- **default_retention** –
- **is_file_lock_enabled** –
- **replication** –

as_dict()

Return bucket representation as a dictionary.

Return type

`dict`

cancel_large_file(file_id)

Cancel a large file transfer.

Parameters

file_id (`str`) – a file ID

concatenate (`outbound_sources, file_name, content_type=None, file_info=None, progress_listener=None, recommended_upload_part_size=None, continue_large_file_id=None, encryption=None, file_retention=None, legal_hold=None, min_part_size=None, max_part_size=None, large_file_sha1=None, custom_upload_timestamp=None, cache_control=None, expires=None, content_disposition=None, content_encoding=None, content_language=None`)

Creates a new file in this bucket by concatenating multiple remote or local sources.

Parameters

- **outbound_sources** (`list[b2sdk.v2.OutboundTransferSource]`) – list of outbound sources (remote or local)
- **file_name** (`str`) – file name of the new file
- **content_type** (`str, None`) – content_type for the new file, if `None` content_type would be automatically determined from file name or it may be copied if it resolves as single part remote source copy
- **file_info** (`dict, None`) – file_info for the new file, if `None` it will be set to empty dict or it may be copied if it resolves as single part remote source copy
- **progress_listener** (`b2sdk.v2.AbstractProgressListener, None`) – a progress listener object to use, or `None` to not report progress

- **recommended_upload_part_size** (`int`, `None`) – the recommended part size to use for uploading local sources or `None` to determine automatically, but remote sources would be copied with maximum possible part size
- **continue_large_file_id** (`str`, `None`) – large file id that should be selected to resume file creation for multipart upload/copy, `None` for automatic search for this id
- **encryption** (`Optional[EncryptionSetting]`) – encryption settings (`None` if unknown)
- **file_retention** (`Optional[FileRetentionSetting]`) – file retention setting
- **legal_hold** (`Optional[LegalHold]`) – legal hold setting
- **min_part_size** (`Optional[int]`) – lower limit of part size for the transfer planner, in bytes
- **max_part_size** (`Optional[int]`) – upper limit of part size for the transfer planner, in bytes
- **large_file_sha1** (`Sha1HexDigest`, `None`) – SHA-1 hash of the result file or `None` if unknown
- **custom_upload_timestamp** (`Optional[int]`) – override object creation date, expressed as a number of milliseconds since epoch
- **cache_control** (`Optional[str]`) – an optional cache control setting. Syntax based on the section 14.9 of RFC 2616. Example string value: ‘public, max-age=86400, s-maxage=3600, no-transform’.
- **expires** (`UnionType[str, datetime, None]`) – an optional cache expiration setting. If this argument is a string, its syntax must be based on the section 14.21 of RFC 2616. Example string value: ‘Thu, 01 Dec 2050 16:00:00 GMT’. If this argument is a `datetime`, it will be converted to a string in the same format.
- **content_disposition** (`Optional[str]`) – an optional content disposition setting. Syntax based on the section 19.5.1 of RFC 2616. Example string value: ‘attachment; filename=”fname.ext”’.
- **content_encoding** (`Optional[str]`) – an optional content encoding setting. Syntax based on the section 14.11 of RFC 2616. Example string value: ‘gzip’.
- **content_language** (`Optional[str]`) – an optional content language setting. Syntax based on the section 14.12 of RFC 2616. Example string value: ‘mi, en_US’.
- **encryption** –
- **file_retention** –
- **legal_hold** –
- **custom_upload_timestamp** –
- **cache_control** –
- **expires** –
- **content_disposition** –
- **content_encoding** –
- **content_language** –

```
concatenate_stream(outbound_sources_iterator, file_name, content_type=None, file_info=None,
    progress_listener=None, recommended_upload_part_size=None,
    continue_large_file_id=None, encryption=None, file_retention=None,
    legal_hold=None, large_file_sha1=None, custom_upload_timestamp=None,
    cache_control=None, expires=None, content_disposition=None,
    content_encoding=None, content_language=None)
```

Creates a new file in this bucket by concatenating stream of multiple remote or local sources.

Parameters

- **outbound_sources_iterator** (`iterator[b2sdk.v2.OutboundTransferSource]`) – iterator of outbound sources
- **file_name** (`str`) – file name of the new file
- **content_type** (`str, None`) – content_type for the new file, if `None` content_type would be automatically determined or it may be copied if it resolves as single part remote source copy
- **file_info** (`dict, None`) – file_info for the new file, if `None` it will be set to empty dict or it may be copied if it resolves as single part remote source copy
- **progress_listener** (`b2sdk.v2.AbstractProgressListener, None`) – a progress listener object to use, or `None` to not report progress
- **recommended_upload_part_size** (`int, None`) – the recommended part size to use for uploading local sources or `None` to determine automatically, but remote sources would be copied with maximum possible part size
- **continue_large_file_id** (`str, None`) – large file id that should be selected to resume file creation for multipart upload/copy, if `None` in multipart case it would always start a new large file
- **encryption** (`Optional[EncryptionSetting]`) – encryption setting (`None` if unknown)
- **file_retention** (`Optional[FileRetentionSetting]`) – file retention setting
- **legal_hold** (`Optional[LegalHold]`) – legal hold setting
- **large_file_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) – SHA-1 hash of the result file or `None` if unknown
- **custom_upload_timestamp** (`Optional[int]`) – override object creation date, expressed as a number of milliseconds since epoch
- **cache_control** (`Optional[str]`) – an optional cache control setting. Syntax based on the section 14.9 of RFC 2616. Example string value: ‘public, max-age=86400, s-maxage=3600, no-transform’.
- **expires** (`UnionType[str, datetime, None]`) – an optional cache expiration setting. If this argument is a string, its syntax must be based on the section 14.21 of RFC 2616. Example string value: ‘Thu, 01 Dec 2050 16:00:00 GMT’. If this argument is a datetime, it will be converted to a string in the same format.
- **content_disposition** (`Optional[str]`) – an optional content disposition setting. Syntax based on the section 19.5.1 of RFC 2616. Example string value: ‘attachment; filename=”fname.ext”’.
- **content_encoding** (`Optional[str]`) – an optional content encoding setting. Syntax based on the section 14.11 of RFC 2616. Example string value: ‘gzip’.
- **content_language** (`Optional[str]`) – an optional content language setting. Syntax based on the section 14.12 of RFC 2616. Example string value: ‘mi, en_US’.

- **encryption** –
- **file_retention** –
- **legal_hold** –
- **large_file_sha1** –
- **custom_upload_timestamp** –
- **cache_control** –
- **expires** –
- **content_disposition** –
- **content_encoding** –
- **content_language** –

```
copy(file_id, new_file_name, content_type=None, file_info=None, offset=0, length=None,
      progress_listener=None, destination_encryption=None, source_encryption=None,
      source_file_info=None, source_content_type=None, file_retention=None, legal_hold=None,
      cache_control=None, min_part_size=None, max_part_size=None, expires=None,
      content_disposition=None, content_encoding=None, content_language=None)
```

Creates a new file in this bucket by (server-side) copying from an existing file.

Parameters

- **file_id** (*str*) – file ID of existing file to copy from
- **new_file_name** (*str*) – file name of the new file
- **content_type** (*str, None*) – content_type for the new file, if None and b2_copy_file will be used content_type will be copied from source file - otherwise content_type would be automatically determined
- **file_info** (*dict, None*) – file_info for the new file, if None will and b2_copy_file will be used file_info will be copied from source file - otherwise it will be set to empty dict
- **offset** (*int*) – offset of existing file that copy should start from
- **length** (*int, None*) – number of bytes to copy, if None then offset have to be 0 and it will use b2_copy_file without range parameter so it may fail if file is too large. For large files length have to be specified to use b2_copy_part instead.
- **progress_listener** (*b2sdk.v2.AbstractProgressListener, None*) – a progress listener object to use for multipart copy, or None to not report progress
- **destination_encryption** (*Optional[EncryptionSetting]*) – encryption settings for the destination (None if unknown)
- **source_encryption** (*Optional[EncryptionSetting]*) – encryption settings for the source (None if unknown)
- **source_file_info** (*Optional[dict]*) – source file's file_info dict, useful when copying files with SSE-C
- **source_content_type** (*Optional[str]*) – source file's content type, useful when copying files with SSE-C
- **file_retention** (*Optional[FileRetentionSetting]*) – file retention setting for the new file.
- **legal_hold** (*Optional[LegalHold]*) – legal hold setting for the new file.

- **cache_control** (`Optional[str]`) – an optional cache control setting. Syntax based on the section 14.9 of RFC 2616. Example string value: ‘public, max-age=86400, s-maxage=3600, no-transform’.
- **min_part_size** (`Optional[int]`) – lower limit of part size for the transfer planner, in bytes
- **max_part_size** (`Optional[int]`) – upper limit of part size for the transfer planner, in bytes
- **expires** (`UnionType[str, datetime, None]`) – an optional cache expiration setting. If this argument is a string, its syntax must be based on the section 14.21 of RFC 2616. Example string value: ‘Thu, 01 Dec 2050 16:00:00 GMT’. If this argument is a datetime, it will be converted to a string in the same format.
- **content_disposition** (`Optional[str]`) – an optional content disposition setting. Syntax based on the section 19.5.1 of RFC 2616. Example string value: ‘attachment; filename=”fname.ext”’.
- **content_encoding** (`Optional[str]`) – an optional content encoding setting. Syntax based on the section 14.11 of RFC 2616. Example string value: ‘gzip’.
- **content_language** (`Optional[str]`) – an optional content language setting. Syntax based on the section 14.12 of RFC 2616. Example string value: ‘mi, en_US’.
- **destination_encryption** –
- **source_encryption** –
- **source_file_info** –
- **source_content_type** –
- **file_retention** –
- **legal_hold** –
- **cache_control** –
- **expires** –
- **content_disposition** –
- **content_encoding** –
- **content_language** –

Return type`FileVersion`

```
create_file(write_intents, file_name, content_type=None, file_info=None, progress_listener=None,
            recommended_upload_part_size=None, continue_large_file_id=None, encryption=None,
            file_retention=None, legal_hold=None, min_part_size=None, max_part_size=None,
            large_file_sha1=None, custom_upload_timestamp=None, cache_control=None, expires=None,
            content_disposition=None, content_encoding=None, content_language=None)
```

Creates a new file in this bucket using an iterable (list, tuple etc) of remote or local sources.

Source ranges can overlap and remote sources will be prioritized over local sources (when possible). For more information and usage examples please see [Advanced usage patterns](#).

Parameters

- **write_intents** (`list[b2sdk.v2.WriteIntent]`) – list of write intents (remote or local sources)

- **file_name** (`str`) – file name of the new file
- **content_type** (`str, None`) – content_type for the new file, if `None` content_type would be automatically determined or it may be copied if it resolves as single part remote source copy
- **file_info** (`dict, None`) – file_info for the new file, if `None` it will be set to empty dict or it may be copied if it resolves as single part remote source copy
- **progress_listener** (`b2sdk.v2.AbstractProgressListener, None`) – a progress listener object to use, or `None` to not report progress
- **recommended_upload_part_size** (`int, None`) – the recommended part size to use for uploading local sources or `None` to determine automatically, but remote sources would be copied with maximum possible part size
- **continue_large_file_id** (`str, None`) – large file id that should be selected to resume file creation for multipart upload/copy, `None` for automatic search for this id
- **encryption** (`Optional[EncryptionSetting]`) – encryption settings (`None` if unknown)
- **file_retention** (`Optional[FileRetentionSetting]`) – file retention setting
- **legal_hold** (`Optional[LegalHold]`) – legal hold setting
- **min_part_size** (`Optional[int]`) – lower limit of part size for the transfer planner, in bytes
- **max_part_size** (`Optional[int]`) – upper limit of part size for the transfer planner, in bytes
- **large_file_sha1** (`Sha1HexDigest, None`) – SHA-1 hash of the result file or `None` if unknown
- **custom_upload_timestamp** (`Optional[int]`) – override object creation date, expressed as a number of milliseconds since epoch
- **cache_control** (`Optional[str]`) – an optional cache control setting. Syntax based on the section 14.9 of RFC 2616. Example string value: ‘public, max-age=86400, s-maxage=3600, no-transform’.
- **expires** (`UnionType[str, datetime, None]`) – an optional cache expiration setting. If this argument is a string, its syntax must be based on the section 14.21 of RFC 2616. Example string value: ‘Thu, 01 Dec 2050 16:00:00 GMT’. If this argument is a datetime, it will be converted to a string in the same format.
- **content_disposition** (`Optional[str]`) – an optional content disposition setting. Syntax based on the section 19.5.1 of RFC 2616. Example string value: ‘attachment; filename=”fname.ext”’.
- **content_encoding** (`Optional[str]`) – an optional content encoding setting. Syntax based on the section 14.11 of RFC 2616. Example string value: ‘gzip’.
- **content_language** (`Optional[str]`) – an optional content language setting. Syntax based on the section 14.12 of RFC 2616. Example string value: ‘mi, en_US’.
- **encryption** –
- **file_retention** –
- **legal_hold** –
- **custom_upload_timestamp** –
- **cache_control** –

- **expires** –
- **content_disposition** –
- **content_encoding** –
- **content_language** –

```
create_file_stream(write_intents_iterator, file_name, content_type=None, file_info=None,  

    progress_listener=None, recommended_upload_part_size=None,  

    continue_large_file_id=None, encryption=None, file_retention=None,  

    legal_hold=None, min_part_size=None, max_part_size=None,  

    large_file_sha1=None, custom_upload_timestamp=None, cache_control=None,  

    expires=None, content_disposition=None, content_encoding=None,  

    content_language=None)
```

Creates a new file in this bucket using a stream of multiple remote or local sources.

Source ranges can overlap and remote sources will be prioritized over local sources (when possible). For more information and usage examples please see [Advanced usage patterns](#).

Parameters

- **write_intents_iterator** (*iterator*[[b2sdk.v2.WriteIntent](#)]) – iterator of write intents which are sorted ascending by *destination_offset*
- **file_name** (*str*) – file name of the new file
- **content_type** (*str*, None) – content_type for the new file, if None content_type would be automatically determined or it may be copied if it resolves as single part remote source copy
- **file_info** (*dict*, None) – file_info for the new file, if None it will be set to empty dict or it may be copied if it resolves as single part remote source copy
- **progress_listener** ([b2sdk.v2.AbstractProgressListener](#), None) – a progress listener object to use, or None to not report progress
- **recommended_upload_part_size** (*int*, None) – the recommended part size to use for uploading local sources or None to determine automatically, but remote sources would be copied with maximum possible part size
- **continue_large_file_id** (*str*, None) – large file id that should be selected to resume file creation for multipart upload/copy, if None in multipart case it would always start a new large file
- **encryption** ([Optional\[EncryptionSetting\]](#)) – encryption settings (None if unknown)
- **file_retention** ([Optional\[FileRetentionSetting\]](#)) – file retention setting
- **legal_hold** ([Optional\[LegalHold\]](#)) – legal hold setting
- **min_part_size** ([Optional\[int\]](#)) – lower limit of part size for the transfer planner, in bytes
- **max_part_size** ([Optional\[int\]](#)) – upper limit of part size for the transfer planner, in bytes
- **large_file_sha1** ([Sha1HexDigest](#), None) – SHA-1 hash of the result file or None if unknown
- **custom_upload_timestamp** ([Optional\[int\]](#)) – override object creation date, expressed as a number of milliseconds since epoch

- **cache_control** (`Optional[str]`) – an optional cache control setting. Syntax based on the section 14.9 of RFC 2616. Example string value: ‘public, max-age=86400, s-maxage=3600, no-transform’.
- **expires** (`UnionType[str, datetime, None]`) – an optional cache expiration setting. If this argument is a string, its syntax must be based on the section 14.21 of RFC 2616. Example string value: ‘Thu, 01 Dec 2050 16:00:00 GMT’. If this argument is a datetime, it will be converted to a string in the same format.
- **content_disposition** (`Optional[str]`) – an optional content disposition setting. Syntax based on the section 19.5.1 of RFC 2616. Example string value: ‘attachment; filename=”fname.ext”’.
- **content_encoding** (`Optional[str]`) – an optional content encoding setting. Syntax based on the section 14.11 of RFC 2616. Example string value: ‘gzip’.
- **content_language** (`Optional[str]`) – an optional content language setting. Syntax based on the section 14.12 of RFC 2616. Example string value: ‘mi, en_US’.
- **encryption** –
- **file_retention** –
- **legal_hold** –
- **custom_upload_timestamp** –
- **cache_control** –
- **expires** –
- **content_disposition** –
- **content_encoding** –
- **content_language** –

delete_file_version(*file_id*, *file_name*, *bypass_governance=False*)

Delete a file version.

Parameters

- **file_id** (`str`) – a file ID
- **file_name** (`str`) – a file name
- **bypass_governance** (`bool`) – Must be set to true if deleting a file version protected by Object Lock governance mode retention settings (unless its retention period expired)

download_file_by_id(*file_id*, *progress_listener=None*, *range_=None*, *encryption=None*)

Download a file by ID.

Note: `download_file_by_id` actually belongs in `b2sdk.v2.B2Api`, not in `b2sdk.v2.Bucket`; we just provide a convenient redirect here

Parameters

- **file_id** (`str`) – a file ID
- **progress_listener** (`Optional[AbstractProgressListener]`) – a progress listener object to use, or `None` to not track progress
- **range** – two integer values, start and end offsets

- **encryption**(*Optional[EncryptionSetting]*) – encryption settings (None if unknown)
- **range_**(*Optional[tuple[int, int]]*) –

Return type*DownloadedFile***download_file_by_name**(*file_name*, *progress_listener*=None, *range_*=None, *encryption*=None)

Download a file by name.

See also:*Synchronizer*, a *high-performance* utility that synchronizes a local folder with a Bucket.**Parameters**

- **file_name** (*str*) – a file name
- **progress_listener** (*Optional[AbstractProgressListener]*) – a progress listener object to use, or None to not track progress
- **range** – two integer values, start and end offsets
- **encryption**(*Optional[EncryptionSetting]*) – encryption settings (None if unknown)
- **range_**(*Optional[tuple[int, int]]*) –

Return type*DownloadedFile***get_download_authorization**(*file_name_prefix*, *valid_duration_in_seconds*)

Return an authorization token that is valid only for downloading files from the given bucket.

Parameters

- **file_name_prefix** (*str*) – a file name prefix, only files that match it could be downloaded
- **valid_duration_in_seconds** (*int*) – a token is valid only during this amount of seconds

get_download_url(*filename*)

Get file download URL.

Parameters**filename** (*str*) – a file name**Return type***str***get_file_info_by_id**(*file_id*)

Gets a file version's by ID.

Parameters

- **file_id** (*str*) – the id of the file who's info will be retrieved.
- **file_id** –

Return typegenerator[*b2sdk.v2FileVersion*]

get_file_info_by_name(file_name)

Gets a file's DownloadVersion by name.

Parameters

- **file_name** (`str`) – the name of the file who's info will be retrieved.
- **file_name** –

Return type

`DownloadVersion`

get_id()

Return bucket ID.

Return type

`str`

get_notification_rules()

Get all notification rules for this bucket.

Return type

`list[NotificationRuleResponse]`

hide_file(file_name)

Hide a file.

Parameters

file_name (`str`) – a file name

Return type

`b2sdk.v2FileVersion`

list_file_versions(file_name, fetch_count=10000)

Lists all of the versions for a single file.

Parameters

- **file_name** (`str`) – the name of the file to list.
- **fetch_count** (`Optional[int]`) – how many entries to list per API call or `None` to use the default. Acceptable values: 1 - 10000

Return type

`generator[b2sdk.v2FileVersion]`

list_parts(file_id, start_part_number=None, batch_size=None)

Get a list of all parts that have been uploaded for a given file.

Parameters

- **file_id** (`str`) – a file ID
- **start_part_number** (`int`) – the first part number to return. defaults to the first part.
- **batch_size** (`int`) – the number of parts to fetch at a time from the server

list_unfinished_large_files(start_file_id=None, batch_size=None, prefix=None)

A generator that yields an `b2sdk.v2.UnfinishedLargeFile` for each unfinished large file in the bucket, starting at the given file, filtering by prefix.

Parameters

- **start_file_id** (`str, None`) – a file ID to start from or `None` to start from the beginning

- **batch_size** (`int`, `None`) – max file count
- **prefix** (`str`, `None`) – file name prefix filter

Return typegenerator[`b2sdk.v2.UnfinishedLargeFile`]**ls**(*folder_to_list*='', *latest_only*=`True`, *recursive*=`False`, *fetch_count*=10000, *with_wildcard*=`False`, *filters*=())

Pretend that folders exist and yields the information about the files in a folder.

B2 has a flat namespace for the files in a bucket, but there is a convention of using “/” as if there were folders. This method searches through the flat namespace to find the files and “folders” that live within a given folder.

When the *recursive* flag is set, lists all of the files in the given folder, and all of its sub-folders.**Parameters**

- **folder_to_list** (`str`) – the name of the folder to list; must not start with “/”. Empty string means top-level folder
- **latest_only** (`bool`) – when `False` returns info about all versions of a file, when `True`, just returns info about the most recent versions
- **recursive** (`bool`) – if `True`, list folders recursively
- **fetch_count** (`Optional[int]`) – how many entries to list per API call or `None` to use the default. Acceptable values: 1 - 10000
- **with_wildcard** (`bool`) – Accepts “*”, “?”, “[]” and “[!]” in *folder_to_list*, similarly to what shell does. As of 1.19.0 it can only be enabled when recursive is also enabled. Also, in this mode, *folder_to_list* is considered to be a filename or a pattern.
- **filters** (`Sequence[Filter]`) – list of filters to apply to the files returned by the server.

Return typegenerator[`tuple[b2sdk.v2FileVersion, str]`]**Returns**generator of (*file_version*, *folder_name*) tuples**Note:** In case of *recursive=True*, *folder_name* is not returned.**set_info**(*new_bucket_info*, *if_revision_is=None*)

Update bucket info.

Parameters

- **new_bucket_info** (`dict`) – new bucket info dictionary
- **if_revision_is** (`int`) – revision number, update the info **only if** *revision* equals to *if_revision_is*

Return type

Bucket

set_notification_rules(*rules*)

Set notification rules for this bucket.

Parameters`rules` (`Iterable[NotificationRule]`) –

Return type`list[NotificationRuleResponse]`**set_type(bucket_type)**

Update bucket type.

Parameters

`bucket_type (str)` – a bucket type (“allPublic” or “allPrivate”)

Return type`Bucket`

`update(bucket_type=None, bucket_info=None, cors_rules=None, lifecycle_rules=None, if_revision_is=None, default_server_side_encryption=None, default_retention=None, replication=None, is_file_lock_enabled=None)`

Update various bucket parameters.

Parameters

- `bucket_type (Optional[str])` – a bucket type, e.g. `allPrivate` or `allPublic`
- `bucket_info (Optional[dict])` – an info to store with a bucket
- `cors_rules (Optional[dict])` – CORS rules to store with a bucket
- `lifecycle_rules (Optional[list[LifecycleRule]])` – lifecycle rules to store with a bucket
- `if_revision_is (Optional[int])` – revision number, update the info **only if** `revision` equals to `if_revision_is`
- `default_server_side_encryption (Optional[EncryptionSetting])` – default server side encryption settings (`None` if unknown)
- `default_retention (Optional[BucketRetentionSetting])` – bucket default retention setting
- `replication (Optional[ReplicationConfiguration])` – replication rules for the bucket
- `is_file_lock_enabled (Optional[bool])` – specifies whether bucket should get File Lock-enabled
- `is_file_lock_enabled –`

Return type`Bucket`

`upload(upload_source, file_name, content_type=None, file_info=None, min_part_size=None, progress_listener=None, encryption=None, file_retention=None, legal_hold=None, large_file_sha1=None, custom_upload_timestamp=None, cache_control=None, expires=None, content_disposition=None, content_encoding=None, content_language=None)`

Upload a file to B2, retrying as needed.

The source of the upload is an `UploadSource` object that can be used to open (and re-open) the file. The result of opening should be a binary file whose `read()` method returns bytes.

The function `opener` should return a file-like object, and it must be possible to call it more than once in case the upload is retried.

Parameters

- `upload_source (b2sdk.v2.AbstractUploadSource)` – an object that opens the source of the upload

- **file_name** (`str`) – the file name of the new B2 file
- **content_type** (`str, None`) – the MIME type, or `None` to accept the default based on file extension of the B2 file name
- **file_info** (`dict, None`) – a file info to store with the file or `None` to not store anything
- **min_part_size** (`Optional[int]`) – lower limit of part size for the transfer planner, in bytes
- **progress_listener** (`b2sdk.v2.AbstractProgressListener, None`) – a progress listener object to use, or `None` to not report progress
- **encryption** (`Optional[EncryptionSetting]`) – encryption settings (`None` if unknown)
- **file_retention** (`Optional[FileRetentionSetting]`) – file retention setting
- **legal_hold** (`Optional[LegalHold]`) – legal hold setting
- **large_file_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) – SHA-1 hash of the result file or `None` if unknown
- **custom_upload_timestamp** (`Optional[int]`) – override object creation date, expressed as a number of milliseconds since epoch
- **cache_control** (`Optional[str]`) – an optional cache control setting. Syntax based on the section 14.9 of RFC 2616. Example string value: ‘public, max-age=86400, s-maxage=3600, no-transform’.
- **expires** (`UnionType[str, datetime, None]`) – an optional cache expiration setting. If this argument is a string, its syntax must be based on the section 14.21 of RFC 2616. Example string value: ‘Thu, 01 Dec 2050 16:00:00 GMT’. If this argument is a datetime, it will be converted to a string in the same format.
- **content_disposition** (`Optional[str]`) – an optional content disposition setting. Syntax based on the section 19.5.1 of RFC 2616. Example string value: ‘attachment; filename=”fname.ext”’.
- **content_encoding** (`Optional[str]`) – an optional content encoding setting. Syntax based on the section 14.11 of RFC 2616. Example string value: ‘gzip’.
- **content_language** (`Optional[str]`) – an optional content language setting. Syntax based on the section 14.12 of RFC 2616. Example string value: ‘mi, en_US’.
- **encryption** –
- **file_retention** –
- **legal_hold** –
- **large_file_sha1** –
- **custom_upload_timestamp** –
- **cache_control** –
- **expires** –
- **content_disposition** –
- **content_encoding** –
- **content_language** –

Return type`b2sdk.v2FileVersion`

```
upload_unbound_stream(read_only_object, file_name, content_type=None, file_info=None,
                      progress_listener=None, recommended_upload_part_size=None,
                      encryption=None, file_retention=None, legal_hold=None, min_part_size=None,
                      max_part_size=None, large_file_sha1=None, buffers_count=2,
                      buffer_size=None, read_size=8192, unused_buffer_timeout_seconds=3600.0,
                      custom_upload_timestamp=None, cache_control=None, expires=None,
                      content_disposition=None, content_encoding=None, content_language=None)
```

Upload an unbound file-like read-only object to a B2 file.

It is assumed that this object is streamed like stdin or socket, and the size is not known up front. It is up to caller to ensure that this object is open and available through the whole streaming process.

If stdin is to be passed, consider opening it in binary mode, if possible on the platform:

```
with open(sys.stdin.fileno(), mode='rb', buffering=min_part_size, closefd=False) as source:
    bucket.upload_unbound_stream(source, 'target-file')
```

For platforms without file descriptors, one can use the following:

```
bucket.upload_unbound_stream(sys.stdin.buffer, 'target-file')
```

but note that buffering in this case depends on the interpreter mode.

`min_part_size`, `recommended_upload_part_size` and `max_part_size` should all be greater than `account_info.get_absolute_minimum_part_size()`.

`buffers_count` describes a desired number of buffers that are to be used. Minimal amount is 2. to determine the method of uploading this stream (if there's only a single buffer we send it as a normal file, if there are at least two – as a large file). Number of buffers determines the amount of memory used by the streaming process and the amount of data that can be pulled from `read_only_object` while also uploading it. Providing more buffers allows for higher upload parallelization. While only one buffer can be filled with data at once, all others are used to send the data in parallel (limited only by the number of parallel threads).

Buffer size can be controlled by `buffer_size` parameter. If left unset, it will default to a value of `recommended_upload_part_size`. Note that in the current implementation buffers are (almost) directly sent to B2, thus whatever is picked as the `buffer_size` will also become the size of the part when uploading a large file in this manner. In rare cases, namely when the whole buffer was sent, but there was an error during sending of last bytes and a retry was issued, additional buffer (above the aforementioned limit) will be temporarily allocated.

Parameters

- `read_only_object` – any object containing a `read` method accepting size of the read
- `file_name (str)` – a file name of the new B2 file
- `content_type (str)` – the MIME type, or `None` to accept the default based on file extension of the B2 file name
- `file_info (Optional[dict[str, str]])` – a file info to store with the file or `None` to not store anything
- `progress_listener (Optional[AbstractProgressListener])` – a progress listener object to use, or `None` to not report progress
- `encryption (Optional[EncryptionSetting])` – encryption settings (`None` if unknown)
- `file_retention (Optional[FileRetentionSetting])` – file retention setting
- `legal_hold (Optional[LegalHold])` – legal hold setting

- **recommended_upload_part_size** (`Optional[int]`) – the recommended part size to use for uploading local sources or `None` to determine automatically
- **min_part_size** (`Optional[int]`) – lower limit of part size for the transfer planner, in bytes
- **max_part_size** (`Optional[int]`) – upper limit of part size for the transfer planner, in bytes
- **large_file_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) – SHA-1 hash of the result file or `None` if unknown
- **buffers_count** (`int`) – desired number of buffers allocated, cannot be smaller than 2
- **buffer_size** (`Optional[int]`) – size of a single buffer that we pull data to or upload data to B2. If `None`, value of `recommended_upload_part_size` is used. If that also is `None`, it will be determined automatically as “recommended upload size”.
- **read_size** (`int`) – size of a single read operation performed on the `read_only_object`
- **unused_buffer_timeout_seconds** (`float`) – amount of time that a buffer can be idle before returning error
- **custom_upload_timestamp** (`Optional[int]`) – override object creation date, expressed as a number of milliseconds since epoch
- **cache_control** (`Optional[str]`) – an optional cache control setting. Syntax based on the section 14.9 of RFC 2616. Example string value: ‘public, max-age=86400, s-maxage=3600, no-transform’.
- **expires** (`UnionType[str, datetime, None]`) – an optional cache expiration setting. If this argument is a string, its syntax must be based on the section 14.21 of RFC 2616. Example string value: ‘Thu, 01 Dec 2050 16:00:00 GMT’. If this argument is a `datetime`, it will be converted to a string in the same format.
- **content_disposition** (`Optional[str]`) – an optional content disposition setting. Syntax based on the section 19.5.1 of RFC 2616. Example string value: ‘attachment; filename=”fname.ext”’.
- **content_encoding** (`Optional[str]`) – an optional content encoding setting. Syntax based on the section 14.11 of RFC 2616. Example string value: ‘gzip’.
- **content_language** (`Optional[str]`) – an optional content language setting. Syntax based on the section 14.12 of RFC 2616. Example string value: ‘mi, en_US’.
- **custom_upload_timestamp** –
- **cache_control** –
- **expires** –
- **content_disposition** –
- **content_encoding** –
- **content_language** –

Return type*b2sdk.v2FileVersion*

File locks

```
class b2sdk.v2.LegalHold
```

Enum holding information about legalHold switch in a file.

```
ON = 'on'
```

legal hold set to “on”

```
OFF = 'off'
```

legal hold set to “off”

```
UNSET = None
```

server default, as for now it is functionally equivalent to OFF

```
UNKNOWN = 'unknown'
```

the client is not authorized to read legal hold settings

```
is_on()
```

Is the legalHold switch on?

```
is_off()
```

Is the legalHold switch off or left as default (which also means off)?

```
is_unknown()
```

Is the legalHold switch unknown?

```
class b2sdk.v2.FileRetentionSetting(mode, retain_until=None)
```

Represent file retention settings, i.e. whether the file is retained, in which mode and until when

Parameters

- **mode** (*RetentionMode*) –
- **retain_until** (*Optional[int]*) –

```
__init__(mode, retain_until=None)
```

Parameters

- **mode** (*RetentionMode*) –
- **retain_until** (*Optional[int]*) –

```
class b2sdk.v2.RetentionMode
```

Enum class representing retention modes set in files and buckets

```
GOVERNANCE = 'governance'
```

retention settings for files in this mode can be modified by clients with appropriate application key capabilities

```
COMPLIANCE = 'compliance'
```

retention settings for files in this mode can only be modified by extending the retention dates by clients with appropriate application key capabilities

```
NONE = None
```

retention not set

```
UNKNOWN = 'unknown'
```

the client is not authorized to read retention settings

```
class b2sdk.v2.BucketRetentionSetting(mode, period=None)
```

Represent bucket's default file retention settings, i.e. whether the files should be retained, in which mode and for how long

Parameters

- **mode** (`RetentionMode`) –
- **period** (`Optional[RetentionPeriod]`) –

```
__init__(mode, period=None)
```

Parameters

- **mode** (`RetentionMode`) –
- **period** (`Optional[RetentionPeriod]`) –

```
class b2sdk.v2.RetentionPeriod(years=None, days=None)
```

Represent a time period (either in days or in years) that is used as a default for bucket retention

Parameters

- **years** (`Optional[int]`) –
- **days** (`Optional[int]`) –

```
KNOWN_UNITS = ['days', 'years']
```

```
__init__(years=None, days=None)
```

Create a retention period, provide exactly one of: days, years

Parameters

- **years** (`Optional[int]`) –
- **days** (`Optional[int]`) –

```
classmethod from_period_dict(period_dict)
```

Build a RetentionPeriod from an object returned by the server, such as:

```
{  
    "duration": 2,  
    "unit": "years"  
}
```

```
as_dict()
```

```
class b2sdk.v2.FileLockConfiguration(default_retention, is_file_lock_enabled)
```

Represent bucket's file lock configuration, i.e. whether the file lock mechanism is enabled and default file retention

Parameters

- **default_retention** (`BucketRetentionSetting`) –
- **is_file_lock_enabled** (`Optional[bool]`) –

```
__init__(default_retention, is_file_lock_enabled)
```

Parameters

- **default_retention** (`BucketRetentionSetting`) –
- **is_file_lock_enabled** (`Optional[bool]`) –

b2sdk.v2.**UNKNOWN_BUCKET_RETENTION**

alias of BucketRetentionSetting('unknown', None)

b2sdk.v2.**UNKNOWN_FILE_LOCK_CONFIGURATION**

alias of FileLockConfiguration(BucketRetentionSetting('unknown', None), None)

b2sdk.v2.**NO_RETENTION_BUCKET_SETTING**

alias of BucketRetentionSetting(None, None)

b2sdk.v2.**NO_RETENTION_FILE_SETTING**

alias of FileRetentionSetting(None, None)

b2sdk.v2.**UNKNOWN_FILE_RETENTION_SETTING**

alias of FileRetentionSetting('unknown', None)

Data classes

```
class b2sdk.v2.FileVersion(api, id_, file_name, size, content_type, content_sha1, file_info, upload_timestamp,
                           account_id, bucket_id, action, content_md5, server_side_encryption,
                           file_retention=FileRetentionSetting(None, None), legal_hold=LegalHold.UNSET,
                           replication_status=None, cache_control=None)
```

A structure which represents a version of a file (in B2 cloud).

Variables

- `~.id_ (str)` – fileId
- `~.file_name (str)` – full file name (with path)
- `~.size` – size in bytes, can be None (unknown)
- `~.content_type (str)` – RFC 822 content type, for example "application/octet-stream"
- `~.upload_timestamp` – in milliseconds since EPOCH (1970-01-01 00:00:00). Can be None (unknown).
- `~.action (str)` – "upload", "hide" or "delete"

Parameters

- `api (B2Api)` –
- `id_ (str)` –
- `file_name (str)` –
- `size (UnionType[int, None, str])` –
- `content_type (Optional[str])` –
- `content_sha1 (Optional[str])` –
- `file_info (dict[str, str])` –
- `upload_timestamp (int)` –
- `account_id (str)` –
- `bucket_id (str)` –
- `action (str)` –
- `content_md5 (Optional[str])` –

- **server_side_encryption** (*EncryptionSetting*) –
- **file_retention** (*FileRetentionSetting*) –
- **legal_hold** (*LegalHold*) –
- **replication_status** (*Optional[ReplicationStatus]*) –
- **cache_control** (*Optional[str]*) –

cache_control

as_dict()

represents the object as a dict which looks almost exactly like the raw api output for upload/list

ADVANCED_HEADERS_LIMIT = 2048

DEFAULT_HEADERS_LIMIT = 7000

account_id

action

api

bucket_id

property content_disposition: str | None

property content_encoding: str | None

property content_language: str | None

content_md5

content_sha1

content_sha1_verified

content_type

delete(bypass_governance=False)

Delete this file version. bypass_governance must be set to true if deleting a file version protected by Object Lock governance mode retention settings (unless its retention period expired)

Parameters

bypass_governance (bool) –

Return type

fileIdAndName

download(progress_listener=None, range_=None, encryption=None)

Parameters

- **progress_listener** (*Optional[AbstractProgressListener]*) –
- **range_** (*Optional[tuple[int, int]]*) –
- **encryption** (*Optional[EncryptionSetting]*) –

Return type

DownloadedFile

property expires: str | None

expires_parsed()

Return the expiration date as a datetime object, or None if there is no expiration date. Raise ValueError if expires property is not a valid HTTP-date.

Return type

Optional[datetime]

file_info

file_name

file_retention

get_content_sha1()

Get the file's content SHA1 hex digest from the header or, if its absent, from the file info. If both are missing, return None.

Return type

Optional[NewType(Sha1HexDigest, str)]

get_fresh_state()

Fetch all the information about this file version and return a newFileVersion object. This method does NOT change the object it is called on.

Return type

FileVersion

property has_large_header: bool

Determine whether FileVersion's info fits header size limit defined by B2. This function makes sense only for "advanced" buckets, i.e. those which have Server-Side Encryption or File Lock enabled.

See <https://www.backblaze.com/b2/docs/files.html#httpHeaderSizeLimit>.

id_

legal_hold

mod_time_millis

replication_status

server_side_encryption

size

update_legal_hold(legal_hold)

Parameters

legal_hold (LegalHold) –

Return type

BaseFileVersion

update_retention(file_retention, bypass_governance=False)

Parameters

• file_retention (FileRetentionSetting) –

• bypass_governance (bool) –

Return type
BaseFileVersion

upload_timestamp

```
class b2sdk.v2.DownloadVersion(api, id_, file_name, size, content_type, content_sha1, file_info,
                                upload_timestamp, server_side_encryption, range_, content_disposition,
                                content_length, content_language, expires, cache_control,
                                content_encoding, file_retention=FileRetentionSetting(None, None),
                                legal_hold=LegalHold.UNSET, replication_status=None)
```

A structure which represents metadata of an initialized download

Parameters

- **api** (B2Api) –
- **id_** (str) –
- **file_name** (str) –
- **size** (int) –
- **content_type** (Optional[str]) –
- **content_sha1** (Optional[str]) –
- **file_info** (dict[str, str]) –
- **upload_timestamp** (int) –
- **server_side_encryption** (EncryptionSetting) –
- **range_** (Range) –
- **content_disposition** (Optional[str]) –
- **content_length** (int) –
- **content_language** (Optional[str]) –
- **content_encoding** (Optional[str]) –
- **file_retention** (FileRetentionSetting) –
- **legal_hold** (LegalHold) –
- **replication_status** (Optional[ReplicationStatus]) –

range_

content_disposition

content_length

content_language

expires

cache_control

content_encoding

expires_parsed()

Return the expiration date as a datetime object, or None if there is no expiration date. Raise ValueError if *expires* property is not a valid HTTP-date.

Return type

`Optional[datetime]`

as_dict()

represents the object as a dict which looks almost exactly like the raw api output for upload/list

Return type

`dict`

api

content_sha1

content_sha1_verified

content_type

delete(*bypass_governance=False*)

Delete this file version. *bypass_governance* must be set to true if deleting a file version protected by Object Lock governance mode retention settings (unless its retention period expired)

Parameters

`bypass_governance (bool) –`

Return type

`FileIdAndName`

file_info

file_name

file_retention

get_content_sha1()

Get the file's content SHA1 hex digest from the header or, if its absent, from the file info. If both are missing, return None.

Return type

`Optional[NewType(Sha1HexDigest, str)]`

id_

legal_hold

mod_time_millis

replication_status

server_side_encryption

size

update_legal_hold(*legal_hold*)

Parameters

`legal_hold (LegalHold) –`

Return type

BaseFileVersion

update_retention(file_retention, bypass_governance=False)**Parameters**

- **file_retention** (*FileRetentionSetting*) –
- **bypass_governance** (*bool*) –

Return type

BaseFileVersion

upload_timestamp**class b2sdk.v2.FileIdAndName**(file_id, file_name)A structure which represents a B2 cloud file with just *file_name* and *fileId* attributes.Used to return data from calls to `b2_delete_file_version` and `b2_cancel_large_file`.**Parameters**

- **file_id** (*str*) –
- **file_name** (*str*) –

classmethod from_cancel_or_delete_response(response)**as_dict()**represents the object as a dict which looks almost exactly like the raw api output for `delete_file_version`

```
__dict__ = mappingproxy({'__module__': 'b2sdk._internal.file_version', '__doc__':
    '\n A structure which represents a B2 cloud file with just `file_name` and `fileId`
    attributes.\n\n Used to return data from calls to b2_delete_file_version and
    b2_cancel_large_file.\n ', '__init__': <function FileIdAndName.__init__>,
    'from_cancel_or_delete_response': <classmethod(<function
    FileIdAndName.from_cancel_or_delete_response>)>, 'as_dict': <function
    FileIdAndName.as_dict>, '__eq__': <function FileIdAndName.__eq__>, '__repr__':
    <function FileIdAndName.__repr__>, '__dict__': <attribute '__dict__' of
    'FileIdAndName' objects>, '__weakref__': <attribute '__weakref__' of
    'FileIdAndName' objects>, '__hash__': None, '__annotations__': {}})
```

class b2sdk.v2.UnfinishedLargeFile

A structure which represents a version of a file (in B2 cloud).

Variables

- **~.file_id** (*str*) – fileId
- **~.file_name** (*str*) – full file name (with path)
- **~.account_id** (*str*) – account ID
- **~.bucket_id** (*str*) – bucket ID
- **~.content_type** (*str*) – RFC 822 content type, for example "application/octet-stream"
- **~.file_info** (*dict*) – file info dict

```
class b2sdk.v2.Part(file_id, part_number, content_length, content_sha1)
```

A structure which represents a *part* of a large file upload.

Variables

- `~.file_id` (`str`) – fileId
- `~.part_number` (`int`) – part number, starting with 1
- `~.content_length` (`str`) – content length, in bytes
- `~.content_sha1` (`str`) – checksum

```
class b2sdk.v2.Range(start, end)
```

HTTP ranges use an *inclusive* index at the end.

```
__init__(start, end)
```

Downloaded File

```
class b2sdk.v2.DownloadedFile(download_version, download_manager, range_, response, encryption,
                                progress_listener, write_buffer_size=None, check_hash=True)
```

Result of a successful download initialization. Holds information about file's metadata and allows to perform the download.

Parameters

- `download_version` (`DownloadVersion`) –
- `download_manager` (`DownloadManager`) –
- `range_` (`Optional[tuple[int, int]]`) –
- `response` (`Response`) –
- `encryption` (`Optional[EncryptionSetting]`) –
- `progress_listener` (`AbstractProgressListener`) –

```
save(file, allow_seeking=None)
```

Read data from B2 cloud and write it to a file-like object

Parameters

- `file` (`BinaryIO`) – a file-like object
- `allow_seeking` (`Optional[bool]`) – if False, download strategies that rely on seeking to write data (parallel strategies) will be discarded.

Return type

`None`

```
save_to(path_, mode=None, allow_seeking=None)
```

Open a local file and write data from B2 cloud to it, also update the mod_time.

Parameters

- `path` – path to file to be opened
- `mode` (`Optional[Literal['wb', 'wb+']]`) – mode in which the file should be opened
- `allow_seeking` (`Optional[bool]`) – if False, download strategies that rely on seeking to write data (parallel strategies) will be discarded.

- **path_** (`str | Path`) –

Return type`None`

```
class b2sdk.v2.MtimeUpdatedFile(path_, mod_time_millis, mode='wb+', buffering=None)
```

Helper class that facilitates updating a files mod_time after closing.

Over the time this class has grown, and now it also adds better exception handling.

Usage:

Parameters

- **path_** (`str | Path`) –
- **mod_time_millis** (`int`) –
- **mode** (`Literal['wb', 'wb+']`) –
- **buffering** (`Optional[int]`) –

```
property path_: str
```

```
write(value)
```

This method is overwritten (monkey-patched) in `__enter__` for performance reasons

```
read(*a)
```

This method is overwritten (monkey-patched) in `__enter__` for performance reasons

```
seekable()
```

Return whether object supports random access.

If False, `seek()`, `tell()` and `truncate()` will raise `OSError`. This method may need to do a test `seek()`.

Return type`bool`

```
seek(offset, whence=0)
```

Change the stream position to the given byte offset.

offset

The stream position, relative to ‘whence’.

whence

The relative position to seek from.

The offset is interpreted relative to the position indicated by whence. Values for whence are:

- `os.SEEK_SET` or 0 – start of stream (the default); offset should be zero or positive
- `os.SEEK_CUR` or 1 – current stream position; offset may be negative
- `os.SEEK_END` or 2 – end of stream; offset is usually negative

Return the new absolute position.

```
tell()
```

Return current stream position.

Enums

```
class b2sdk.v2.MetadataDirectiveMode(value, names=None, *values, module=None, qualname=None,
                                         type=None, start=1, boundary=None)
```

Mode of handling metadata when copying a file

COPY = 401

copy metadata from the source file

REPLACE = 402

ignore the source file metadata and set it to provided values

```
class b2sdk.v2.NewerFileSyncMode(value, names=None, *values, module=None, qualname=None,
                                         type=None, start=1, boundary=None)
```

Mode of handling files newer on destination than on source

SKIP = 101

skip syncing such file

REPLACE = 102

replace the file on the destination with the (older) file on source

RAISE_ERROR = 103

raise a non-transient error, failing the sync operation

```
class b2sdk.v2.CompareVersionMode(value, names=None, *values, module=None, qualname=None,
                                         type=None, start=1, boundary=None)
```

Mode of comparing versions of files to determine what should be synced and what shouldn't

MODTIME = 201

use file modification time on source filesystem

SIZE = 202

compare using file size

NONE = 203

compare using file name only

```
class b2sdk.v2.KeepOrDeleteMode(value, names=None, *values, module=None, qualname=None, type=None,
                                         start=1, boundary=None)
```

Mode of dealing with old versions of files on the destination

DELETE = 301

delete the old version as soon as the new one has been uploaded

KEEP_BEFORE_DELETE = 302

keep the old versions of the file for a configurable number of days before deleting them, always keeping the newest version

NO_DELETE = 303

keep old versions of the file, do not delete anything

Progress reporters

Note: Concrete classes described in this chapter implement methods defined in `AbstractProgressListener`

`class b2sdk.v2.AbstractProgressListener(description="")`

Interface expected by B2Api upload and download methods to report on progress.

This interface just accepts the number of bytes transferred so far. Subclasses will need to know the total size if they want to report a percent done.

Parameters

`description (str) –`

`abstract set_total_bytes(total_byte_count)`

Always called before `__enter__` to set the expected total number of bytes.

May be called more than once if an upload is retried.

Parameters

`total_byte_count (int) – expected total number of bytes`

Return type

`None`

`abstract bytes_completed(byte_count)`

Report the given number of bytes that have been transferred so far. This is not a delta, it is the total number of bytes transferred so far.

Transfer can fail and restart from the beginning, so byte count can decrease between calls.

Parameters

`byte_count (int) – number of bytes have been transferred`

Return type

`None`

`change_description(new_description)`

Ability to change the description after the listener is started.

Note: whether the change of description is allowed depends on the implementation. The safest option is to change the description before setting the total bytes.

Parameters

`new_description (str) – the new description to be used`

Return type

`bool`

Returns

information whether the description was changed

`close()`

Must be called when you're done with the listener. In well-structured code, should be called only once.

Return type

`None`

`class b2sdk.v2.TqdmProgressListener(*args, **kwargs)`

Progress listener based on tqdm library.

This listener displays a nice progress bar, but requires `tqdm` package to be installed.

```
class b2sdk.v2.SimpleProgressListener(*args, **kwargs)
```

Just a simple progress listener which prints info on a console.

```
class b2sdk.v2.DoNothingProgressListener(description="")
```

This listener gives no output whatsoever.

Parameters

description (`str`) –

```
class b2sdk.v2.ProgressListenerForTest(*args, **kwargs)
```

Capture all the calls so they can be checked.

```
b2sdk.v2.make_progress_listener(description, quiet)
```

Produce the best progress listener available for the given parameters.

Parameters

- **description** (`str`) – listener description
- **quiet** (`bool`) – if `True`, do not output anything

Return type

`AbstractProgressListener`

Returns

a listener object

Synchronizer

Synchronizer is a powerful utility with functionality of a basic backup application. It is able to copy entire folders into the cloud and back to a local drive or even between two cloud buckets, providing retention policies and many other options.

The **high performance** of sync is credited to parallelization of:

- listing local directory contents
- listing bucket contents
- uploads
- downloads

Synchronizer spawns threads to perform the operations listed above in parallel to shorten the backup window to a minimum.

Sync Options

Following are the important optional arguments that can be provided while initializing *Synchronizer* class.

- **compare_version_mode**: When comparing the source and destination files for finding whether to replace them or not, `compare_version_mode` can be passed to specify the mode of comparison. For possible values see `b2sdk.v2.CompareVersionMode`. Default value is `b2sdk.v2.CompareVersionMode.MODTIME`
- **compare_threshold**: It's the minimum size (in bytes)/modification time (in seconds) difference between source and destination files before we assume that it is new and replace.
- **newer_file_mode**: To identify whether to skip or replace if source is older. For possible values see `b2sdk.v2.NewerFileSyncMode`. If you don't specify this the sync will raise `b2sdk.v2.exception.DestFileNewer` in case any of the source file is older than destination.

- `keep_days_or_delete`: specify policy to keep or delete older files. For possible values see `b2sdk.v2.KeepOrDeleteMode`. Default is `DO_NOTHING`.
- `keep_days`: if `keep_days_or_delete` is `b2sdk.v2.KeepOrDeleteMode.KEEP_BEFORE_DELETE` then this specifies for how many days should we keep.

```
>>> from b2sdk.v2 import ScanPoliciesManager
>>> from b2sdk.v2 import parse_folder
>>> from b2sdk.v2 import Synchronizer, SyncReport
>>> from b2sdk.v2 import KeepOrDeleteMode, CompareVersionMode, NewerFileSyncMode
>>> import time
>>> import sys

>>> source = '/home/user1/b2_example'
>>> destination = 'b2://example-mybucket-b2'

>>> source = parse_folder(source, b2_api)
>>> destination = parse_folder(destination, b2_api)

>>> policies_manager = ScanPoliciesManager(exclude_all_symlinks=True)

>>> synchronizer = Synchronizer(
    max_workers=10,
    policies_manager=policies_manager,
    dry_run=False,
    allow_empty_source=True,
    compare_version_mode=CompareVersionMode.SIZE,
    compare_threshold=10,
    newer_file_mode=NewerFileSyncMode.REPLACE,
    keep_days_or_delete=KeepOrDeleteMode.KEEP_BEFORE_DELETE,
    keep_days=10,
)
```

We have a file (hello.txt) which is present in destination but not on source (my local), so it will be deleted and since our mode is to keep the delete file, it will be hidden for 10 days in bucket.

```
>>> no_progress = False
>>> with SyncReport(sys.stdout, no_progress) as reporter:
    synchronizer.sync_folders(
        source_folder=source,
        dest_folder=destination,
        now_millis=int(round(time.time() * 1000)),
        reporter=reporter,
    )
upload f1.txt
delete hello.txt (old version)
hide hello.txt
```

We changed f1.txt and added 1 byte. Since our compare_threshold is 10, it will not do anything.

```
>>> with SyncReport(sys.stdout, no_progress) as reporter:
    synchronizer.sync_folders(
        source_folder=source,
        dest_folder=destination,
```

(continues on next page)

(continued from previous page)

```
    now_millis=int(round(time.time() * 1000)),
    reporter=reporter,
)
```

We changed f1.txt and added more than 10 bytes. Since our compare_threshold is 10, it will replace the file at destination folder.

```
>>> with SyncReport(sys.stdout, no_progress) as reporter:
    synchronizer.sync_folders(
        source_folder=source,
        dest_folder=destination,
        now_millis=int(round(time.time() * 1000)),
        reporter=reporter,
    )
upload f1.txt
```

Let's just delete the file and not keep - keep_days_or_delete = DELETE You can avoid passing keep_days argument in this case because it will be ignored anyways

```
>>> synchronizer = Synchronizer(
    max_workers=10,
    policies_manager=policies_manager,
    dry_run=False,
    allow_empty_source=True,
    compare_version_mode=CompareVersionMode.SIZE,
    compare_threshold=10, # in bytes
    newer_file_mode=NewerFileSyncMode.REPLACE,
    keep_days_or_delete=KeepOrDeleteMode.DELETE,
)

>>> with SyncReport(sys.stdout, no_progress) as reporter:
    synchronizer.sync_folders(
        source_folder=source,
        dest_folder=destination,
        now_millis=int(round(time.time() * 1000)),
        reporter=reporter,
    )
delete f1.txt
delete f1.txt (old version)
delete hello.txt (old version)
upload f2.txt
delete hello.txt (hide marker)
```

As you can see, it deleted f1.txt and its older versions (no hide this time) and deleted hello.txt also because now we don't want the file anymore. also, we added another file f2.txt which gets uploaded.

Now we changed newer_file_mode to SKIP and compare_version_mode to MODTIME. also uploaded a new version of f2.txt to bucket using B2 web.

```
>>> synchronizer = Synchronizer(
    max_workers=10,
    policies_manager=policies_manager,
    dry_run=False,
```

(continues on next page)

(continued from previous page)

```

        allow_empty_source=True,
        compare_version_mode=CompareVersionMode.MODTIME,
        compare_threshold=10, # in seconds
        newer_file_mode=NewerFileSyncMode.SKIP,
        keep_days_or_delete=KeepOrDeleteMode.DELETE,
    )
>>> with SyncReport(sys.stdout, no_progress) as reporter:
    synchronizer.sync_folders(
        source_folder=source,
        dest_folder=destination,
        now_millis=int(round(time.time() * 1000)),
        reporter=reporter,
    )
)

```

As expected, nothing happened, it found a file that was older at source but did not do anything because we skipped.

Now we changed newer_file_mode again to REPLACE and also uploaded a new version of f2.txt to bucket using B2 web.

```

>>> synchronizer = Synchronizer(
    max_workers=10,
    policies_manager=policies_manager,
    dry_run=False,
    allow_empty_source=True,
    compare_version_mode=CompareVersionMode.MODTIME,
    compare_threshold=10,
    newer_file_mode=NewerFileSyncMode.REPLACE,
    keep_days_or_delete=KeepOrDeleteMode.DELETE,
)
>>> with SyncReport(sys.stdout, no_progress) as reporter:
    synchronizer.sync_folders(
        source_folder=source,
        dest_folder=destination,
        now_millis=int(round(time.time() * 1000)),
        reporter=reporter,
    )
delete f2.txt (old version)
upload f2.txt

```

Handling encryption

The *Synchronizer* object may need *EncryptionSetting* instances to perform downloads and copies. For this reason, the *sync_folder* method accepts an *EncryptionSettingsProvider*, see [Server-Side Encryption](#) for further explanation and [Sync Encryption Settings Providers](#) for public API.

Public API classes

```
class b2sdk.v2.ScanPoliciesManager(exclude_dir_regexes=(), exclude_file_regexes=(),
                                    include_file_regexes=(), exclude_all_symlinks=False,
                                    exclude_modified_before=None, exclude_modified_after=None,
                                    exclude_uploaded_before=None, exclude_uploaded_after=None)
```

Policy object used when scanning folders, used to decide which files to include in the list of files.

Code that scans through files should at least use `should_exclude_file()` to decide whether each file should be included; it will check include/exclude patterns for file names, as well as patterns for excluding directories.

Code that scans may optionally use `should_exclude_directory()` to test whether it can skip a directory completely and not bother listing the files and sub-directories in it.

Parameters

- `exclude_dir_regexes` (`Iterable[str | Pattern]`) –
- `exclude_file_regexes` (`Iterable[str | Pattern]`) –
- `include_file_regexes` (`Iterable[str | Pattern]`) –
- `exclude_all_symlinks` (`bool`) –
- `exclude_modified_before` (`Optional[int]`) –
- `exclude_modified_after` (`Optional[int]`) –
- `exclude_uploaded_before` (`Optional[int]`) –
- `exclude_uploaded_after` (`Optional[int]`) –

```
__init__(exclude_dir_regexes=(), exclude_file_regexes=(), include_file_regexes=(),
        exclude_all_symlinks=False, exclude_modified_before=None, exclude_modified_after=None,
        exclude_uploaded_before=None, exclude_uploaded_after=None)
```

Parameters

- `exclude_dir_regexes` (`Iterable[str | Pattern]`) – regexes to exclude directories
- `exclude_file_regexes` (`Iterable[str | Pattern]`) – regexes to exclude files
- `include_file_regexes` (`Iterable[str | Pattern]`) – regexes to include files
- `exclude_all_symlinks` (`bool`) – if True, exclude all symlinks
- `exclude_modified_before` (`Optional[int]`) – optionally exclude file versions (both local and b2) modified before (in millis)
- `exclude_modified_after` (`Optional[int]`) – optionally exclude file versions (both local and b2) modified after (in millis)
- `exclude_uploaded_before` (`Optional[int]`) – optionally exclude b2 file versions uploaded before (in millis)
- `exclude_uploaded_after` (`Optional[int]`) – optionally exclude b2 file versions uploaded after (in millis)

The regex matching priority for a given path is: 1) the path is always excluded if it's dir matches *exclude_dir_regexes*, if not then 2) the path is always included if it matches *include_file_regexes*, if not then 3) the path is excluded if it matches *exclude_file_regexes*, if not then 4) the path is included

should_exclude_local_path(*local_path*)

Whether a local path should be excluded from the scan or not.

This method assumes that the directory holding the *path_* has already been checked for exclusion.

Parameters

local_path (*LocalPath*) –

should_exclude_b2_file_version(*file_version*, *relative_path*)

Whether a b2 file version should be excluded from the scan or not.

This method assumes that the directory holding the *path_* has already been checked for exclusion.

Parameters

- **file_version** (*FileVersion*) –
- **relative_path** (*str*) –

should_exclude_b2_directory(*dir_path*)

Given the path of a directory, relative to the scan point, decide if all of the files in it should be excluded from the scan.

Parameters

dir_path (*str*) –

should_exclude_local_directory(*dir_path*)

Given the path of a directory, relative to the scan point, decide if all of the files in it should be excluded from the scan.

Parameters

dir_path (*str*) –

```
class b2sdk.v2.Synchronizer(max_workers,
    policies_manager=<b2sdk._internal.scan.policies.ScanPoliciesManager
object>, dry_run=False, allow_empty_source=False,
newer_file_mode=NewerFileSyncMode.RAISE_ERROR,
keep_days_or_delete=KeepOrDeleteMode.NO_DELETE,
compare_version_mode=CompareVersionMode.MODTIME,
compare_threshold=None, keep_days=None,
sync_policy_manager=<b2sdk._internal.sync.policy_manager.SyncPolicyManager
object>, upload_mode=UploadMode.FULL,
absolute_minimum_part_size=None)
```

Copies multiple “files” from source to destination. Optionally deletes or hides destination files that the source does not have.

The synchronizer can copy files:

- From a B2 bucket to a local destination.
- From a local source to a B2 bucket.
- From one B2 bucket to another.
- Between different folders in the same B2 bucket. It will sync only the latest versions of files.

By default, the synchronizer:

- Fails when the specified source directory doesn't exist or is empty. (see *allow_empty_source* argument)

- Fails when the source is newer. (see `newer_file_mode` argument)
- Doesn't delete a file if it's present on the destination but not on the source. (see `keep_days_or_delete` and `keep_days` arguments)
- Compares files based on modification time. (see `compare_version_mode` and `compare_threshold` arguments)

Parameters

- `sync_policy_manager` (`SyncPolicyManager`) –
- `upload_mode` (`UploadMode`) –
- `absolute_minimum_part_size` (`Optional[int]`) –

```
__init__(max_workers, policies_manager=<b2sdk._internal.scan.policies.ScanPoliciesManager object>,
        dry_run=False, allow_empty_source=False,
        newer_file_mode=NewerFileSyncMode.RAISE_ERROR,
        keep_days_or_delete=KeepOrDeleteMode.NO_DELETE,
        compare_version_mode=CompareVersionMode.MODTIME, compare_threshold=None,
        keep_days=None,
        sync_policy_manager=<b2sdk._internal.sync.policy_manager.SyncPolicyManager object>,
        upload_mode=UploadMode.FULL, absolute_minimum_part_size=None)
```

Initialize synchronizer class and validate arguments

Parameters

- `max_workers` (`int`) – max number of workers
- `policies_manager` – object which decides which files to process
- `dry_run` (`bool`) – test mode, does not actually transfer/delete when enabled
- `allow_empty_source` (`bool`) – if True, do not check whether source folder is empty
- `newer_file_mode` (`b2sdk.v2.NewerFileSyncMode`) – setting which determines handling for destination files newer than on the source
- `keep_days_or_delete` (`b2sdk.v2.KeepOrDeleteMode`) – setting which determines if we should delete or not delete or keep for `keep_days`
- `compare_version_mode` (`b2sdk.v2.CompareVersionMode`) – how to compare the source and destination files to find new ones
- `compare_threshold` (`int`) – should be greater than 0, default is 0
- `keep_days` (`int`) – if `keep_days_or_delete` is `b2sdk.v2.KeepOrDeleteMode.KEEP_BEFORE_DELETE`, then this should be greater than 0
- `sync_policy_manager` (`SyncPolicyManager`) – object which decides what to do with each file (upload, download, delete, copy, hide etc)
- `upload_mode` (`UploadMode`) – determines how file uploads are handled
- `absolute_minimum_part_size` (`Optional[int]`) – minimum file part size for large files
- `sync_policy_manager` –
- `upload_mode` –
- `absolute_minimum_part_size` –

```
sync_folders(source_folder, dest_folder, now_millis, reporter, encryption_settings_provider=<b2sdk._internal.sync.encryption_provider.ServerDefaultSyncEncryptionSettingsProvider object>)
```

Syncs two folders. Always ensures that every file in the source is also in the destination. Deletes any file versions in the destination older than history_days.

Parameters

- **source_folder** (*AbstractFolder*) – source folder object
- **dest_folder** (*AbstractFolder*) – destination folder object
- **now_millis** (*int*) – current time in milliseconds
- **reporter** (*Optional[SyncReport]*) – progress reporter
- **encryption_settings_provider** (*AbstractSyncEncryptionSettingsProvider*) – encryption setting provider

```
class b2sdk.v2.SyncReport(stdout, no_progress)
```

Handle reporting progress for syncing.

Print out each file as it is processed, and puts up a sequence of progress bars.

The progress bars are:

- Step 1/1: count local files
- Step 2/2: compare file lists
- Step 3/3: transfer files

This class is THREAD SAFE, so it can be used from parallel sync threads.

Parameters

- **stdout** (*TextIOWrapper*) –
- **no_progress** (*bool*) –

```
update_compare(delta)
```

Report that more files have been compared.

Parameters

- **delta** (*int*) – number of files compared

```
end_compare(total_transfer_files, total_transfer_bytes)
```

Report that the comparison has been finished.

Parameters

- **total_transfer_files** (*int*) – total number of transferred files
- **total_transfer_bytes** (*int*) – total number of transferred bytes

```
update_transfer(file_delta, byte_delta)
```

Update transfer info.

Parameters

- **file_delta** (*int*) – number of files transferred
- **byte_delta** (*int*) – number of bytes transferred

```
UPDATE_INTERVAL = 0.1
```

`__init__(stdout, no_progress)`

Parameters

- `stdout` (`TextIOWrapper`) –
- `no_progress` (`bool`) –

`circular_symlink_skipped(path)`

Add a circular symlink error message to the list of warnings.

Parameters

`path` (`str`) – file path

Return type

`None`

`close()`

Perform a clean-up.

`end_total()`

Total files count is done. Can proceed to step 2.

Return type

`None`

`error(message)`

Print an error, gracefully interleaving it with a progress bar.

Parameters

`message` (`str`) – an error message

Return type

`None`

`has_errors_or_warnings()`

Check if there are any errors or warnings.

Return type

`bool`

Returns

True if there are any errors or warnings

`invalid_name(path, error)`

Add an invalid filename error message to the list of warnings.

Parameters

- `path` (`str`) – file path
- `error` (`str`) –

Return type

`None`

`local_access_error(path)`

Add a file access error message to the list of warnings.

Parameters

`path` (`str`) – file path

Return type

`None`

local_permission_error(*path*)

Add a permission error message to the list of warnings.

Parameters

- **path** (`str`) – file path

Return type

- `None`

print_completion(*message*)

Remove the progress bar, prints a message, and puts the progress bar back.

Parameters

- **message** (`str`) – an error message

Return type

- `None`

symlink_skipped(*path*)**Parameters**

- **path** (`str`) –

Return type

- `None`

update_count(*delta*)

Report that items have been processed.

Parameters

- **delta** (`int`) –

Return type

- `None`

update_total(*delta*)

Report that more files have been found for comparison.

Parameters

- **delta** (`int`) – number of files found since the last check

Return type

- `None`

stdout: `TextIOWrapper`

no_progress: `bool`

Sync Encryption Settings Providers

class b2sdk.v2.AbstractSyncEncryptionSettingsProvider

Object which provides an appropriate EncryptionSetting object for sync, i.e. complex operations with multiple sources and destinations

abstract get_setting_for_upload(*bucket*, *b2_file_name*, *file_info*, *length*)

Return an EncryptionSetting for uploading an object or None if server should decide.

Parameters

- **bucket** (`Bucket`) –

- **b2_file_name** (`str`) –
- **file_info** (`Optional[dict]`) –
- **length** (`int`) –

Return type

`Optional[EncryptionSetting]`

abstract get_source_setting_for_copy(`bucket, source_file_version`)

Return an EncryptionSetting for a source of copying an object or None if not required

Parameters

- **bucket** (`Bucket`) –
- **source_file_version** (`FileVersion`) –

Return type

`Optional[EncryptionSetting]`

abstract get_destination_setting_for_copy(`bucket, dest_b2_file_name, source_file_version, target_file_info=None`)

Return an EncryptionSetting for a destination for copying an object or None if server should decide

Parameters

- **bucket** (`Bucket`) –
- **dest_b2_file_name** (`str`) –
- **source_file_version** (`FileVersion`) –
- **target_file_info** (`Optional[dict]`) –

Return type

`Optional[EncryptionSetting]`

abstract get_setting_for_download(`bucket, file_version`)

Return an EncryptionSetting for downloading an object from, or None if not required

Parameters

- **bucket** (`Bucket`) –
- **file_version** (`FileVersion`) –

Return type

`Optional[EncryptionSetting]`

class b2sdk.v2.ServerDefaultSyncEncryptionSettingsProvider

Encryption settings provider which assumes setting-less reads and a bucket default for writes.

class b2sdk.v2.BasicSyncEncryptionSettingsProvider(`read_bucket_settings, write_bucket_settings`)

Basic encryption setting provider that supports exactly one encryption setting per bucket for reading and one encryption setting per bucket for writing

Parameters

- **read_bucket_settings** (`dict[str, Optional[EncryptionSetting]]`) –
- **write_bucket_settings** (`dict[str, Optional[EncryptionSetting]]`) –

`__init__(read_bucket_settings, write_bucket_settings)`

Parameters

- `read_bucket_settings` (`dict[str, Optional[EncryptionSetting]]`) –
- `write_bucket_settings` (`dict[str, Optional[EncryptionSetting]]`) –

B2 Utility functions

`b2sdk.v2.b2_url_encode(s)`

URL-encode a unicode string to be sent to B2 in an HTTP header.

Parameters

`s (str)` – a unicode string to encode

Returns

URL-encoded string

Return type

`str`

`b2sdk.v2.b2_url_decode(s)`

Decode a Unicode string returned from B2 in an HTTP header.

Parameters

`s (str)` – a unicode string to decode

Returns

a Python unicode string.

Return type

`str`

`b2sdk.v2.choose_part_ranges(content_length, minimum_part_size)`

Return a list of (offset, length) for the parts of a large file.

Parameters

- `content_length` (`int`) – content length value
- `minimum_part_size` (`int`) – a minimum file part size

Return type

`list`

`b2sdk.v2.fix_windows_path_limit(path)`

Prefix paths when running on Windows to overcome 260 character path length limit. See [https://msdn.microsoft.com/en-us/library/windows/desktop/aa365247\(v=vs.85\).aspx#maxpath](https://msdn.microsoft.com/en-us/library/windows/desktop/aa365247(v=vs.85).aspx#maxpath)

Parameters

`path (str)` – a path to prefix

Returns

a prefixed path

Return type

`str`

b2sdk.v2.format_and_scale_fraction(numerator, denominator, unit)

Pick a good scale for representing a fraction, and format it.

Parameters

- **numerator** (*int*) – a numerator of a fraction
- **denominator** (*int*) – a denominator of a fraction
- **unit** (*str*) – an arbitrary unit name

Returns

scaled and formatted fraction

Return type

str

b2sdk.v2.format_and_scale_number(x, unit)

Pick a good scale for representing a number and format it.

Parameters

- **x** (*int*) – a number
- **unit** (*str*) – an arbitrary unit name

Returns

scaled and formatted number

Return type

str

b2sdk.v2.hex_sha1_of_stream(input_stream, content_length)

Return the 40-character hex SHA1 checksum of the first content_length bytes in the input stream.

Parameters

- **input_stream** (*Any*) – stream object, which exposes read(int|None) method
- **content_length** (*int*) – expected length of the stream

Return type

str

b2sdk.v2.hex_sha1_of_bytes(data)

Return the 40-character hex SHA1 checksum of the data.

Parameters

data (*bytes*) –

Return type

NewType(Sha1HexDigest, str)

class b2sdk.v2.TempDir

Context manager that creates and destroys a temporary directory.

__enter__()

Return the unicode path to the temp dir.

__exit__(exc_type, exc_val, exc_tb)

Write intent

`class b2sdk.v2.WriteIntent`

Wrapper for outbound source that defines destination offset.

`__init__(outbound_source, destination_offset=0)`

Parameters

- `outbound_source` (`b2sdk.v2.OutboundTransferSource`) – data source (remote or local)
- `destination_offset` (`int`) – point of start in destination file

`property length`

Length of the write intent.

Return type

`int`

`property destination_end_offset`

Offset of source end in destination file.

Return type

`int`

`is_copy()`

States if outbound source is remote source and requires copying.

Return type

`bool`

`is_upload()`

States if outbound source is local source and requires uploading.

Return type

`bool`

`get_content_sha1()`

Return a 40-character string containing the hex SHA1 checksum, which can be used as the `large_file_sha1` entry.

This method is only used if a large file is constructed from only a single source. If that source's hash is known, the result file's SHA1 checksum will be the same and can be copied.

If the source's sha1 is unknown and can't be calculated, `None` is returned.

Rtype str

Return type

`Optional[NewType(Sha1HexDigest, str)]`

`classmethod wrap_sources_iterator(outbound_sources_iterator)`

Helper that wraps outbound sources iterator with write intents.

Can be used in cases similar to concatenate to automatically compute destination offsets

Param

`iterator[b2sdk.v2.OutboundTransferSource]` `outbound_sources_iterator`: iterator of outbound sources

Return type

`generator[b2sdk.v2.WriteIntent]`

Outbound Transfer Source

```
class b2sdk.v2.OutboundTransferSource
```

Abstract class for defining outbound transfer sources.

Supported outbound transfer sources are:

- b2sdk.v2.CopySource
- b2sdk.v2.UploadSourceBytes
- b2sdk.v2.UploadSourceLocalFile
- b2sdk.v2.UploadSourceLocalFileRange
- b2sdk.v2.UploadSourceStream
- b2sdk.v2.UploadSourceStreamRange

```
abstract get_content_length()
```

Returns the number of bytes of data in the file.

Return type

int

```
abstract get_content_sha1()
```

Return a 40-character string containing the hex SHA1 checksum, which can be used as the *large_file_sha1* entry.

This method is only used if a large file is constructed from only a single source. If that source's hash is known, the result file's SHA1 checksum will be the same and can be copied.

If the source's sha1 is unknown and can't be calculated, *None* is returned.

Return type

Optional[NewType(Sha1HexDigest, str)]

```
abstract is_upload()
```

Returns True if outbound source is an upload source.

Return type

bool

```
abstract is_copy()
```

Returns True if outbound source is a copy source.

Return type

bool

Encryption Settings

```
class b2sdk.v2.EncryptionKey(secret, key_id)
```

Hold information about encryption key: the key itself, and its id. The id may be None, if it's not set in encrypted file's fileInfo, or UNKNOWN_KEY_ID when that information is missing. The secret may be None, if encryption metadata is read from the server.

Parameters

- **secret** (Optional[bytes]) –
- **key_id** (UnionType[str, None, _UnknownKeyId]) –

`__init__(secret, key_id)`

Parameters

- `secret` (`Optional[bytes]`) –
- `key_id` (`UnionType[str, None, _UnknownKeyId]`) –

`b2sdk.v2.UNKNOWN_KEY_ID`

alias of `_UnknownKeyId.unknown_key_id`

`class b2sdk.v2.EncryptionSetting(mode, algorithm=None, key=None)`

Hold information about encryption mode, algorithm and key (for bucket default, file version info or even upload)

Parameters

- `mode` (`EncryptionMode`) –
- `algorithm` (`EncryptionAlgorithm`) –
- `key` (`EncryptionKey`) –

`__init__(mode, algorithm=None, key=None)`

Parameters

- `mode` (`EncryptionMode`) – encryption mode
- `algorithm` (`EncryptionAlgorithm`) – encryption algorithm
- `key` (`EncryptionKey`) – encryption key object for SSE-C
- `mode` –
- `algorithm` –
- `key` –

`as_dict()`

Represent the setting as a dict, for example:

```
{
    'mode': 'SSE-C',
    'algorithm': 'AES256',
    'customerKey': 'U3hWbVlxM3Q2dj15JEImRS1IQE1jUWZUalduWnI0dTc=',
    'customerKeyMd5': 'SWx9GFv5BTT1jdwf48Bx+Q=='
}
```

```
{
    'mode': 'SSE-B2',
    'algorithm': 'AES256'
}
```

or

```
{
    'mode': 'none'
}
```

`v2.SSE_NONE = <EncryptionSetting(EncryptionMode.NONE, None, None)>`

Commonly used “no encryption” setting

```
v2.SSE_B2_AES = <EncryptionSetting(EncryptionMode.SSE_B2, EncryptionAlgorithm.AES256, None)>
```

Commonly used SSE-B2 setting

Encryption Types

```
class b2sdk._internal.encryption.types.EncryptionAlgorithm(value, names=None, *values, module=None, qualname=None, type=None, start=1, boundary=None)
```

Encryption algorithm.

AES256 = 'AES256'

get_length()

Return type

`int`

```
class b2sdk._internal.encryption.types.EncryptionMode(value, names=None, *values, module=None, qualname=None, type=None, start=1, boundary=None)
```

Encryption mode.

UNKNOWN = `None`

unknown encryption mode (sdk doesn't know or used key has no rights to know)

NONE = 'none'

no encryption (plaintext)

SSE_B2 = 'SSE-B2'

server-side encryption with key maintained by B2

SSE_C = 'SSE-C'

server-side encryption with key provided by the client

can_be_set_as_bucket_default()

2.8.3 Internal API

Note: See [Internal interface](#) chapter to learn when and how to safely use the Internal API

b2sdk._internal.session – B2 Session

```
class b2sdk._internal.session.TokenType(value, names=None, *values, module=None, qualname=None, type=None, start=1, boundary=None)
```

Bases: `Enum`

API = 'api'

API_TOKEN_ONLY = 'api_token_only'

```

UPLOAD_PART = 'upload_part'

UPLOAD_SMALL = 'upload_small'

class b2sdk._internal.session.B2Session(account_info=None, cache=None,
                                         api_config=<b2sdk._internal.api_config.B2HttpApiConfig
                                         object>)

Bases: object

A facade that supplies the correct api_url and account_auth_token to methods of underlying raw_api and reauthorizes if necessary.

Parameters

- account_info (Optional[AbstractAccountInfo]) –
- cache (Optional[AbstractCache]) –
- api_config (B2HttpApiConfig) –

SQLITE_ACCOUNT_INFO_CLASS
alias of SqliteAccountInfo

B2HTTP_CLASS
alias of B2Http

__init__(account_info=None, cache=None, api_config=<b2sdk._internal.api_config.B2HttpApiConfig object>)
Initialize Session using given account info.

Parameters

- account_info (Optional[AbstractAccountInfo]) – an instance of UrlPoolAccountInfo, or any custom class derived from AbstractAccountInfo. To learn more about Account Info objects, see here SqliteAccountInfo
- cache (Optional[AbstractCache]) – an instance of the one of the following classes: DummyCache, InMemoryCache, AuthInfoCache, or any custom class derived from AbstractCache. It is used by B2Api to cache the mapping between bucket name and bucket ids. default is DummyCache


:param api_config

Parameters

- api_config (B2HttpApiConfig) –

authorize_automatically()
Perform automatic account authorization, retrieving all account data from account info object passed during initialization.

authorize_account(realm, application_key_id, application_key)
Perform account authorization.

Parameters

- realm (str) – a realm to authorize account in (usually just “production”)
- application_key_id (str) – application key ID
- application_key (str) – user’s application key

cancel_large_file(file_id)

```

```
create_bucket(account_id, bucket_name, bucket_type, bucket_info=None, cors_rules=None,  
             lifecycle_rules=None, default_server_side_encryption=None, is_file_lock_enabled=None,  
             replication=None)
```

Parameters

- **lifecycle_rules** (`Optional[list[LifecycleRule]]`) –
- **is_file_lock_enabled** (`Optional[bool]`) –
- **replication** (`Optional[ReplicationConfiguration]`) –

```
create_key(account_id, capabilities, key_name, valid_duration_seconds, bucket_id, name_prefix)
```

```
delete_key(application_key_id)
```

```
delete_bucket(account_id, bucket_id)
```

```
delete_file_version(file_id, file_name, bypass_governance=False)
```

Parameters

`bypass_governance (bool) –`

```
download_file_from_url(url, range_=None, encryption=None)
```

Parameters

`encryption (Optional[EncryptionSetting]) –`

```
finish_large_file(file_id, part_shal_array)
```

```
get_download_authorization(bucket_id, file_name_prefix, valid_duration_in_seconds)
```

```
get_file_info_by_id(file_id)
```

Parameters

`file_id (str) –`

Return type

`dict[str, Any]`

```
get_file_info_by_name(bucket_name, file_name)
```

Parameters

- **bucket_name** (`str`) –
- **file_name** (`str`) –

Return type

`dict[str, Any]`

```
get_upload_url(bucket_id)
```

```
get_upload_part_url(file_id)
```

```
hide_file(bucket_id, file_name)
```

```
list_buckets(account_id, bucket_id=None, bucket_name=None)
```

```
list_file_names(bucket_id, start_file_name=None, max_file_count=None, prefix=None)
```

```
list_file_versions(bucket_id, start_file_name=None, start_file_id=None, max_file_count=None,  
                   prefix=None)
```

```
list_keys(account_id, max_key_count=None, start_application_key_id=None)
list_parts(file_id, start_part_number, max_part_count)
list_unfinished_large_files(bucket_id, start_file_id=None, max_file_count=None, prefix=None)
start_large_file(bucket_id, file_name, content_type, file_info, server_side_encryption=None,
    file_retention=None, legal_hold=None, custom_upload_timestamp=None)
```

Parameters

- **server_side_encryption** (`Optional[EncryptionSetting]`) –
- **file_retention** (`Optional[FileRetentionSetting]`) –
- **legal_hold** (`Optional[LegalHold]`) –
- **custom_upload_timestamp** (`Optional[int]`) –

```
update_bucket(account_id, bucket_id, bucket_type=None, bucket_info=None, cors_rules=None,
    lifecycle_rules=None, if_revision_is=None, default_server_side_encryption=None,
    default_retention=None, replication=None, is_file_lock_enabled=None)
```

Parameters

- **lifecycle_rules** (`Optional[list[LifecycleRule]]`) –
- **default_server_side_encryption** (`Optional[EncryptionSetting]`) –
- **default_retention** (`Optional[BucketRetentionSetting]`) –
- **replication** (`Optional[ReplicationConfiguration]`) –
- **is_file_lock_enabled** (`Optional[bool]`) –

```
upload_file(bucket_id, file_name, content_length, content_type, content_sha1, file_info, data_stream,
    server_side_encryption=None, file_retention=None, legal_hold=None,
    custom_upload_timestamp=None)
```

Parameters

- **server_side_encryption** (`Optional[EncryptionSetting]`) –
- **file_retention** (`Optional[FileRetentionSetting]`) –
- **legal_hold** (`Optional[LegalHold]`) –
- **custom_upload_timestamp** (`Optional[int]`) –

```
upload_part(file_id, part_number, content_length, sha1_sum, input_stream, server_side_encryption=None)
```

Parameters

server_side_encryption (`Optional[EncryptionSetting]`) –

```
get_download_url_by_id(file_id)
```

```
get_download_url_by_name(bucket_name, file_name)
```

```
copy_file(source_file_id, new_file_name, bytes_range=None, metadata_directive=None,
    content_type=None, file_info=None, destination_bucket_id=None,
    destination_server_side_encryption=None, source_server_side_encryption=None,
    file_retention=None, legal_hold=None)
```

Parameters

- **destination_server_side_encryption** (`Optional[EncryptionSetting]`) –
- **source_server_side_encryption** (`Optional[EncryptionSetting]`) –
- **file_retention** (`Optional[FileRetentionSetting]`) –
- **legal_hold** (`Optional[LegalHold]`) –

`copy_part(source_file_id, large_file_id, part_number, bytes_range=None, destination_server_side_encryption=None, source_server_side_encryption=None)`

Parameters

- **destination_server_side_encryption** (`Optional[EncryptionSetting]`) –
- **source_server_side_encryption** (`Optional[EncryptionSetting]`) –

`update_file_retention(file_id, file_name, file_retention, bypass_governance=False)`

Parameters

- **file_retention** (`FileRetentionSetting`) –
- **bypass_governance** (`bool`) –

`update_file_legal_hold(file_id, file_name, legal_hold)`

Parameters

`legal_hold(LegalHold)` –

`get_bucket_notification_rules(bucket_id)`

`set_bucket_notification_rules(bucket_id, rules)`

b2sdk._internal.raw_api – B2 raw api wrapper

`class b2sdk._internal.raw_api.MetadataDirectiveMode(value, names=None, *values, module=None, qualname=None, type=None, start=1, boundary=None)`

Bases: `Enum`

Mode of handling metadata when copying a file

`COPY = 401`

copy metadata from the source file

`REPLACE = 402`

ignore the source file metadata and set it to provided values

`class b2sdk._internal.raw_api.LifecycleRule`

Bases: `TypedDict`

Lifecycle Rule.

External documentation: [B2 Cloud Storage Lifecycle Rules](#).

`fileNamePrefix: str`

`daysFromHidingToDeleteing: Optional[int]`

`daysFromUploadingToHiding: Optional[int]`

```

class b2sdk._internal.raw_api.NameValueDict
    Bases: TypedDict

        name: str
        value: str

class b2sdk._internal.raw_api.NotificationTargetConfiguration
    Bases: TypedDict

        Notification Target Configuration.

        hmacSha256SigningSecret, if present, has to be a string of 32 alphanumeric characters.

        targetType: Literal['webhook']

        url: str

        customHeaders: Optional[list[NameValueDict]]

        hmacSha256SigningSecret: Optional[str]

class b2sdk._internal.raw_api.NotificationRule
    Bases: _NotificationRule

        Notification Rule.

        When creating or modifying a notification rule, isSuspended and suspensionReason are ignored.

        isSuspended: bool

        eventTypes: list[Literal['b2:ObjectCreated:*', 'b2:ObjectCreated:Upload',
            'b2:ObjectCreated:MultipartUpload', 'b2:ObjectCreated:Copy',
            'b2:ObjectCreated:Replica', 'b2:ObjectCreated:MultipartReplica',
            'b2:ObjectDeleted:*', 'b2:ObjectDeleted:Delete', 'b2:ObjectDeleted:LifecycleRule',
            'b2:HideMarkerCreated:*', 'b2:HideMarkerCreated:Hide',
            'b2:HideMarkerCreated:LifecycleRule']]]

        isEnabled: bool

        name: str

        objectNamePrefix: str

        targetConfiguration: NotificationTargetConfiguration

        suspensionReason: str

class b2sdk._internal.raw_api.NotificationRuleResponse
    Bases: _NotificationRule

        isSuspended: bool

        eventTypes: list[Literal['b2:ObjectCreated:*', 'b2:ObjectCreated:Upload',
            'b2:ObjectCreated:MultipartUpload', 'b2:ObjectCreated:Copy',
            'b2:ObjectCreated:Replica', 'b2:ObjectCreated:MultipartReplica',
            'b2:ObjectDeleted:*', 'b2:ObjectDeleted:Delete', 'b2:ObjectDeleted:LifecycleRule',
            'b2:HideMarkerCreated:*', 'b2:HideMarkerCreated:Hide',
            'b2:HideMarkerCreated:LifecycleRule']]]


```

```
isEnabled: bool
name: str
objectNamePrefix: str
targetConfiguration: NotificationTargetConfiguration
suspensionReason: str

b2sdk._internal.raw_api.notification_rule_response_to_request(rule)
    Convert NotificationRuleResponse to NotificationRule.

    Parameters
        rule (NotificationRuleResponse) –
    Return type
        NotificationRule

class b2sdk._internal.raw_api.AbstractRawApi
    Bases: object
    Direct access to the B2 web apis.

    abstract authorize_account(realm_url, application_key_id, application_key)
    abstract cancel_large_file(api_url, account_auth_token, file_id)
    abstract copy_file(api_url, account_auth_token, source_file_id, new_file_name, bytes_range=None,
                      metadata_directive=None, content_type=None, file_info=None,
                      destination_bucket_id=None, destination_server_side_encryption=None,
                      source_server_side_encryption=None, file_retention=None, legal_hold=None)

    Parameters
        • destination_server_side_encryption (Optional[EncryptionSetting]) –
        • source_server_side_encryption (Optional[EncryptionSetting]) –
        • file_retention (Optional[FileRetentionSetting]) –
        • legal_hold (Optional[LegalHold]) –

    abstract copy_part(api_url, account_auth_token, source_file_id, large_file_id, part_number,
                      bytes_range=None, destination_server_side_encryption=None,
                      source_server_side_encryption=None)

    Parameters
        • destination_server_side_encryption (Optional[EncryptionSetting]) –
        • source_server_side_encryption (Optional[EncryptionSetting]) –
    abstract create_bucket(api_url, account_auth_token, account_id, bucket_name, bucket_type,
                          bucket_info=None, cors_rules=None, lifecycle_rules=None,
                          default_server_side_encryption=None, is_file_lock_enabled=None,
                          replication=None)

    Parameters
        • lifecycle_rules (Optional[list[LifecycleRule]]) –
        • default_server_side_encryption (Optional[EncryptionSetting]) –
```

- `is_file_lock_enabled(Optional[bool])` –
- `replication(Optional[ReplicationConfiguration])` –

abstract `create_key(api_url, account_auth_token, account_id, capabilities, key_name, valid_duration_seconds, bucket_id, name_prefix)`

abstract `download_file_from_url(account_auth_token_or_none, url, range_=None, encryption=None)`

Parameters

- `encryption(Optional[EncryptionSetting])` –

abstract `delete_key(api_url, account_auth_token, application_key_id)`

abstract `delete_bucket(api_url, account_auth_token, account_id, bucket_id)`

abstract `delete_file_version(api_url, account_auth_token, file_id, file_name, bypass_governance=False)`

Parameters

- `bypass_governance(bool)` –

abstract `finish_large_file(api_url, account_auth_token, file_id, part_shal_array)`

abstract `get_download_authorization(api_url, account_auth_token, bucket_id, file_name_prefix, valid_duration_in_seconds)`

abstract `get_file_info_by_id(api_url, account_auth_token, file_id)`

Parameters

- `api_url(str)` –
- `account_auth_token(str)` –
- `file_id(str)` –

Return type

- `dict[str, Any]`

abstract `get_file_info_by_name(download_url, account_auth_token, bucket_name, file_name)`

Parameters

- `download_url(str)` –
- `account_auth_token(str)` –
- `bucket_name(str)` –
- `file_name(str)` –

Return type

- `dict[str, Any]`

abstract `get_upload_url(api_url, account_auth_token, bucket_id)`

abstract `get_upload_part_url(api_url, account_auth_token, file_id)`

abstract `hide_file(api_url, account_auth_token, bucket_id, file_name)`

abstract `list_buckets(api_url, account_auth_token, account_id, bucket_id=None, bucket_name=None)`

```
abstract list_file_names(api_url, account_auth_token, bucket_id, start_file_name=None,
                         max_file_count=None, prefix=None)

abstract list_file_versions(api_url, account_auth_token, bucket_id, start_file_name=None,
                           start_file_id=None, max_file_count=None, prefix=None)

abstract list_keys(api_url, account_auth_token, account_id, max_key_count=None,
                   start_application_key_id=None)

abstract list_parts(api_url, account_auth_token, file_id, start_part_number, max_part_count)

abstract list_unfinished_large_files(api_url, account_auth_token, bucket_id, start_file_id=None,
                                      max_file_count=None, prefix=None)

abstract start_large_file(api_url, account_auth_token, bucket_id, file_name, content_type, file_info,
                          server_side_encryption=None, file_retention=None, legal_hold=None)
```

Parameters

- **server_side_encryption** (`Optional[EncryptionSetting]`) –
- **file_retention** (`Optional[FileRetentionSetting]`) –
- **legal_hold** (`Optional[LegalHold]`) –

```
abstract update_bucket(api_url, account_auth_token, account_id, bucket_id, bucket_type=None,
                      bucket_info=None, cors_rules=None, lifecycle_rules=None,
                      if_revision_is=None, default_server_side_encryption=None,
                      default_retention=None, replication=None, is_file_lock_enabled=None)
```

Parameters

- **lifecycle_rules** (`Optional[list[LifecycleRule]]`) –
- **default_server_side_encryption** (`Optional[EncryptionSetting]`) –
- **default_retention** (`Optional[BucketRetentionSetting]`) –
- **replication** (`Optional[ReplicationConfiguration]`) –
- **is_file_lock_enabled** (`Optional[bool]`) –

```
abstract update_file_retention(api_url, account_auth_token, file_id, file_name, file_retention,
                               bypass_governance=False)
```

Parameters

- **file_retention** (`FileRetentionSetting`) –
- **bypass_governance** (`bool`) –

```
classmethod get_upload_file_headers(upload_auth_token, file_name, content_length, content_type,
                                     content_sha1, file_info, server_side_encryption, file_retention,
                                     legal_hold, custom_upload_timestamp=None)
```

Parameters

- **upload_auth_token** (`str`) –
- **file_name** (`str`) –
- **content_length** (`int`) –
- **content_type** (`str`) –

- `content_sha1` (`str`) –
- `file_info` (`dict`) –
- `server_side_encryption` (`Optional[EncryptionSetting]`) –
- `file_retention` (`Optional[FileRetentionSetting]`) –
- `legal_hold` (`Optional[LegalHold]`) –
- `custom_upload_timestamp` (`Optional[int]`) –

Return type`dict`

```
abstract upload_file(upload_url, upload_auth_token, file_name, content_length, content_type,
                     content_sha1, file_info, data_stream, server_side_encryption=None,
                     file_retention=None, legal_hold=None, custom_upload_timestamp=None)
```

Parameters

- `server_side_encryption` (`Optional[EncryptionSetting]`) –
- `file_retention` (`Optional[FileRetentionSetting]`) –
- `legal_hold` (`Optional[LegalHold]`) –
- `custom_upload_timestamp` (`Optional[int]`) –

```
abstract upload_part(upload_url, upload_auth_token, part_number, content_length, sha1_sum,
                      input_stream, server_side_encryption=None)
```

Parameters`server_side_encryption` (`Optional[EncryptionSetting]`) –

```
get_download_url_by_id(download_url, file_id)
```

```
get_download_url_by_name(download_url, bucket_name, file_name)
```

```
abstract set_bucket_notification_rules(api_url, account_auth_token, bucket_id, rules)
```

Parameters

- `api_url` (`str`) –
- `account_auth_token` (`str`) –
- `bucket_id` (`str`) –
- `rules` (`Iterable[NotificationRule]`) –

Return type`list[NotificationRuleResponse]`

```
abstract get_bucket_notification_rules(api_url, account_auth_token, bucket_id)
```

Parameters

- `api_url` (`str`) –
- `account_auth_token` (`str`) –
- `bucket_id` (`str`) –

Return type`list[NotificationRuleResponse]`

```
class b2sdk._internal.raw_api.B2RawHTTPApi(b2_http)
```

Bases: *AbstractRawApi*

Provide access to the B2 web APIs, exactly as they are provided by b2.

Requires that you provide all necessary URLs and auth tokens for each call.

Each API call decodes the returned JSON and returns a dict.

For details on what each method does, see the B2 docs:

<https://www.backblaze.com/b2/docs/>

This class is intended to be a super-simple, very thin layer on top of the HTTP calls. It can be mocked-out for testing higher layers. And this class can be tested by exercising each call just once, which is relatively quick.

`__init__(b2_http)`

`authorize_account(realm_url, application_key_id, application_key)`

`cancel_large_file(api_url, account_auth_token, file_id)`

`create_bucket(api_url, account_auth_token, account_id, bucket_name, bucket_type, bucket_info=None, cors_rules=None, lifecycle_rules=None, default_server_side_encryption=None, is_file_lock_enabled=None, replication=None)`

Parameters

- **`lifecycle_rules`** (`Optional[list[LifecycleRule]]`) –
- **`default_server_side_encryption`** (`Optional[EncryptionSetting]`) –
- **`is_file_lock_enabled`** (`Optional[bool]`) –
- **`replication`** (`Optional[ReplicationConfiguration]`) –

`create_key(api_url, account_auth_token, account_id, capabilities, key_name, valid_duration_seconds, bucket_id, name_prefix)`

`delete_bucket(api_url, account_auth_token, account_id, bucket_id)`

`delete_file_version(api_url, account_auth_token, file_id, file_name, bypass_governance=False)`

Parameters

`bypass_governance(bool)` –

`delete_key(api_url, account_auth_token, application_key_id)`

`download_file_from_url(account_auth_token_or_none, url, range_=None, encryption=None)`

Issue a streaming request for download of a file, potentially authorized.

Parameters

- **`account_auth_token_or_none`** (`str`) – an optional account auth token to pass in
- **`url`** (`str`) – the full URL to download from
- **`range`** (`tuple`) – two-element tuple for http Range header
- **`encryption`** (`Optional[EncryptionSetting]`) – encryption settings for downloading
- **`encryption`** –

Returns

b2_http response

```
finish_large_file(api_url, account_auth_token, file_id, part_sha1_array)
get_download_authorization(api_url, account_auth_token, bucket_id, file_name_prefix,
                           valid_duration_in_seconds)
get_file_info_by_id(api_url, account_auth_token, file_id)
```

Parameters

- **api_url** (`str`) –
- **account_auth_token** (`str`) –
- **file_id** (`str`) –

Return type`dict[str, Any]`

```
get_file_info_by_name(download_url, account_auth_token, bucket_name, file_name)
```

Parameters

- **download_url** (`str`) –
- **account_auth_token** (`str`) –
- **bucket_name** (`str`) –
- **file_name** (`str`) –

Return type`dict[str, Any]`

```
get_upload_url(api_url, account_auth_token, bucket_id)
```

```
get_upload_part_url(api_url, account_auth_token, file_id)
```

```
hide_file(api_url, account_auth_token, bucket_id, file_name)
```

```
list_buckets(api_url, account_auth_token, account_id, bucket_id=None, bucket_name=None)
```

```
list_file_names(api_url, account_auth_token, bucket_id, start_file_name=None, max_file_count=None,
                  prefix=None)
```

```
list_file_versions(api_url, account_auth_token, bucket_id, start_file_name=None, start_file_id=None,
                     max_file_count=None, prefix=None)
```

```
list_keys(api_url, account_auth_token, account_id, max_key_count=None,
            start_application_key_id=None)
```

```
list_parts(api_url, account_auth_token, file_id, start_part_number, max_part_count)
```

```
list_unfinished_large_files(api_url, account_auth_token, bucket_id, start_file_id=None,
                               max_file_count=None, prefix=None)
```

```
start_large_file(api_url, account_auth_token, bucket_id, file_name, content_type, file_info,
                   server_side_encryption=None, file_retention=None, legal_hold=None,
                   custom_upload_timestamp=None)
```

Parameters

- **server_side_encryption** (`Optional[EncryptionSetting]`) –
- **file_retention** (`Optional[FileRetentionSetting]`) –

- **legal_hold** (`Optional[LegalHold]`) –
- **custom_upload_timestamp** (`Optional[int]`) –

`update_bucket(api_url, account_auth_token, account_id, bucket_id, bucket_type=None, bucket_info=None, cors_rules=None, lifecycle_rules=None, if_revision_is=None, default_server_side_encryption=None, default_retention=None, replication=None, is_file_lock_enabled=None)`

Parameters

- **lifecycle_rules** (`Optional[list[LifecycleRule]]`) –
- **default_server_side_encryption** (`Optional[EncryptionSetting]`) –
- **default_retention** (`Optional[BucketRetentionSetting]`) –
- **replication** (`Optional[ReplicationConfiguration]`) –
- **is_file_lock_enabled** (`Optional[bool]`) –

`update_file_retention(api_url, account_auth_token, file_id, file_name, file_retention, bypass_governance=False)`

Parameters

- **file_retention** (`FileRetentionSetting`) –
- **bypass_governance** (`bool`) –

`update_file_legal_hold(api_url, account_auth_token, file_id, file_name, legal_hold)`

Parameters

`legal_hold(LegalHold)` –

`check_b2_filename(filename)`

Raise an appropriate exception with details if the filename is unusable.

See <https://www.backblaze.com/b2/docs/files.html> for the rules.

Parameters

`filename` – a proposed filename in unicode

Returns

None if the filename is usable

`upload_file(upload_url, upload_auth_token, file_name, content_length, content_type, content_sha1, file_info, data_stream, server_side_encryption=None, file_retention=None, legal_hold=None, custom_upload_timestamp=None)`

Upload one, small file to b2.

Parameters

- **upload_url** – the upload_url from b2_authorize_account
- **upload_auth_token** – the auth token from b2_authorize_account
- **file_name** – the name of the B2 file
- **content_length** – number of bytes in the file
- **content_type** – MIME type
- **content_sha1** – hex SHA1 of the contents of the file
- **file_info** (`dict`) – extra file info to upload

- **data_stream** – a file like object from which the contents of the file can be read
- **server_side_encryption** (`Optional[EncryptionSetting]`) – encryption setting for the file
- **file_retention** (`Optional[FileRetentionSetting]`) – retention setting for the file
- **legal_hold** (`Optional[LegalHold]`) – legal hold setting for the file
- **custom_upload_timestamp** (`Optional[int]`) – custom upload timestamp for the file

Returns

`upload_part(upload_url, upload_auth_token, part_number, content_length, content_sha1, data_stream, server_side_encryption=None)`

Parameters

server_side_encryption (`Optional[EncryptionSetting]`) –

`copy_file(api_url, account_auth_token, source_file_id, new_file_name, bytes_range=None, metadata_directive=None, content_type=None, file_info=None, destination_bucket_id=None, destination_server_side_encryption=None, source_server_side_encryption=None, file_retention=None, legal_hold=None)`

Parameters

- **destination_server_side_encryption** (`Optional[EncryptionSetting]`) –
- **source_server_side_encryption** (`Optional[EncryptionSetting]`) –
- **file_retention** (`Optional[FileRetentionSetting]`) –
- **legal_hold** (`Optional[LegalHold]`) –

`copy_part(api_url, account_auth_token, source_file_id, large_file_id, part_number, bytes_range=None, destination_server_side_encryption=None, source_server_side_encryption=None)`

Parameters

- **destination_server_side_encryption** (`Optional[EncryptionSetting]`) –
- **source_server_side_encryption** (`Optional[EncryptionSetting]`) –

`set_bucket_notification_rules(api_url, account_auth_token, bucket_id, rules)`

Parameters

- **api_url** (`str`) –
- **account_auth_token** (`str`) –
- **bucket_id** (`str`) –
- **rules** (`list[NotificationRule]`) –

Return type

`list[NotificationRuleResponse]`

`get_bucket_notification_rules(api_url, account_auth_token, bucket_id)`

Parameters

- **api_url** (`str`) –
- **account_auth_token** (`str`) –
- **bucket_id** (`str`) –

Return type`list[NotificationRuleResponse]`**b2sdk._internal.b2http – thin http client wrapper**

`b2sdk._internal.b2http.random()` → x in the interval [0, 1).

`b2sdk._internal.b2http.setlocale(name)`

`class b2sdk._internal.b2http.ResponseContextManager(response)`

A context manager that closes a requests.Response when done.

`class b2sdk._internal.b2http.HttpCallback`

A callback object that does nothing. Overrides pre_request and/or post_request as desired.

`pre_request(method, url, headers)`

Called before processing an HTTP request.

Raises an exception if this request should not be processed. The exception raised must inherit from B2HttpCallbackPreRequestException.

Parameters

- `method (str)` – str, one of: ‘POST’, ‘GET’, etc.
- `url (str)` – the URL that will be used
- `headers (dict)` – the header sent with the request

`post_request(method, url, headers, response)`

Called after processing an HTTP request. Should not raise an exception.

Raises an exception if this request should be treated as failing. The exception raised must inherit from B2HttpCallbackPostRequestException.

Parameters

- `method (str)` – one of: ‘POST’, ‘GET’, etc.
- `url (str)` – the URL that will be used
- `headers (dict)` – the header sent with the request
- `response` – a response object from the requests library

`class b2sdk._internal.b2http.ClockSkewHook`

`post_request(method, url, headers, response)`

Raise an exception if the clock in the server is too different from the clock on the local host.

The Date header contains a string that looks like: “Fri, 16 Dec 2016 20:52:30 GMT”.

Parameters

- `method (str)` – one of: ‘POST’, ‘GET’, etc.
- `url (str)` – the URL that will be used
- `headers (dict)` – the header sent with the request
- `response` – a response object from the requests library

```
class b2sdk._internal.b2http.B2Http(api_config=<b2sdk._internal.api_config.B2HttpApiConfig object>)
```

A wrapper for the requests module. Provides the operations needed to access B2, and handles retrying when the returned status is 503 Service Unavailable, 429 Too Many Requests, etc.

The operations supported are:

- post_json_return_json
- post_content_return_json
- get_content

The methods that return JSON either return a Python dict or raise a subclass of B2Error. They can be used like this:

```
try:
    response_dict = b2_http.post_json_return_json(url, headers, params)
    ...
except B2Error as e:
    ...
```

Please note that the timeout/retry system, including class-level variables, is not a part of the interface and is subject to change.

Parameters

api_config (*B2HttpApiConfig*) –

CONNECTION_TIMEOUT = 46

TIMEOUT = 128

TIMEOUT_FOR_COPY = 1200

TIMEOUT_FOR_UPLOAD = 128

TRY_COUNT_DATA = 20

TRY_COUNT_DOWNLOAD = 20

TRY_COUNT_HEAD = 5

TRY_COUNT_OTHER = 5

add_callback(*callback*)

Add a callback that inherits from HttpCallback.

Parameters

callback (*callable*) – a callback to be added to a chain

request(*method, url, headers, data=None, try_count=20, params=None, *, stream=False, _timeout=None*)

Use like this:

```
try:
    response_dict = b2_http.request('POST', url, headers, data)
    ...
except B2Error as e:
    ...
```

Parameters

- **method** (`Literal['POST', 'GET', 'HEAD']`) – uppercase HTTP method name
- **url** (`str`) – a URL to call
- **headers** (`dict[str, str]`) – headers to send.
- **data** (`UnionType[BytesIO, bytes, None]`) – raw bytes or a file-like object to send
- **try_count** (`int`) – a number of retries
- **params** (`Optional[dict[str, str]]`) – a dict that will be converted to query string for GET requests or additional metadata for POST requests
- **stream** (`bool`) – if True, the response will be streamed
- **_timeout** (`Optional[int]`) – a timeout for the request in seconds if not default

Return type

Response

Returns

final response

Raises

B2Error if the request fails

```
request_content_return_json(method, url, headers, data=None, try_count=20, params=None, *,  
_timeout=None)
```

Use like this:

```
try:  
    response_dict = b2_http.request_content_return_json('POST', url, headers, u  
    ↴data)  
    ...  
except B2Error as e:  
    ...
```

Parameters

- **method** (`Literal['POST', 'GET', 'HEAD']`) – uppercase HTTP method name
- **url** (`str`) – a URL to call
- **headers** (`dict[str, str]`) – headers to send.
- **data** (`UnionType[BytesIO, bytes, None]`) – raw bytes or a file-like object to send
- **try_count** (`int`) –
- **params** (`Optional[dict[str, str]]`) –
- **_timeout** (`Optional[int]`) –

Return type`Union[Dict[str, JSON], List[JSON], str, int, float, bool, None]`**Returns**

decoded JSON

```
post_content_return_json(url, headers, data, try_count=20, post_params=None, _timeout=None)
```

Use like this:

```
try:
    response_dict = b2_http.post_content_return_json(url, headers, data)
    ...
except B2Error as e:
    ...
```

Parameters

- **url** (`str`) – a URL to call
- **headers** (`dict[str, str]`) – headers to send.
- **data** (`bytes | IOBase`) – a file-like object to send
- **url** –
- **headers** –
- **try_count** (`int`) –
- **post_params** (`Optional[dict[str, str]]`) –
- **_timeout** (`Optional[int]`) –

Return type`Union[Dict[str, JSON], List[JSON], str, int, float, bool, None]`**Returns**

a dict that is the decoded JSON

post_json_return_json(*url, headers, params, try_count=5*)

Use like this:

```
try:
    response_dict = b2_http.post_json_return_json(url, headers, params)
    ...
except B2Error as e:
    ...
```

Parameters

- **url** (`str`) – a URL to call
- **headers** (`dict`) – headers to send.
- **params** (`dict`) – a dict that will be converted to JSON
- **try_count** (`int`) –

Returns

the decoded JSON document

Return type`dict`**get_content(*url, headers, try_count=20*)**

Fetches content from a URL.

Use like this:

```
try:  
    with b2_http.get_content(url, headers) as response:  
        for byte_data in response.iter_content(chunk_size=1024):  
            ...  
    except B2Error as e:  
        ...
```

The response object is only guarantee to have:

- headers
- iter_content()

Parameters

- **url** (*str*) – a URL to call
- **headers** (*dict*) – headers to send
- **try_count** (*int*) – a number or retries
- **try_count** –

Returns

Context manager that returns an object that supports iter_content()

head_content(*url, headers, try_count=5*)

Does a HEAD instead of a GET for the URL. The response's content is limited to the headers.

Use like this:

```
try:  
    response_dict = b2_http.head_content(url, headers)  
    ...  
except B2Error as e:  
    ...
```

The response object is only guaranteed to have:

- headers

Parameters

- **url** (*str*) – a URL to call
- **headers** (*dict[str, Any]*) – headers to send
- **try_count** (*int*) – a number or retries
- **url** –
- **headers** –
- **try_count** –

Return type

Response

Returns

HTTP response

```
class b2sdk._internal.b2http.NotDecompressingHTTPAdapter(pool_connections=10, pool_maxsize=10,
                                                          max_retries=0, pool_block=False)

HTTP adapter that uses b2sdk._internal.requests.NotDecompressingResponse instead of the default
requests.Response class.

build_response(req, resp)
```

Builds a Response object from a urllib3 response. This should not be called from user code, and is only exposed for use when subclassing the HTTPAdapter

Parameters

- **req** – The PreparedRequest used to generate the response.
- **resp** – The urllib3 response object.

Return type*requests.Response***b2sdk._internal.requests – modified requests.models.Response class**

This file contains modified parts of the requests module (<https://github.com/psf/requests>, models.py), original Copyright 2019 Kenneth Reitz

Changes made to the original source: see NOTICE

```
class b2sdk._internal.requests.NotDecompressingResponse
```

iter_content(chunk_size=1, decode_unicode=False)

Iterates over the response data. When stream=True is set on the request, this avoids reading the content at once into memory for large responses. The chunk size is the number of bytes it should read into memory. This is not necessarily the length of each item returned as decoding can take place.

chunk_size must be of type int or None. A value of None will function differently depending on the value of *stream*. *stream*=True will read data as it arrives in whatever size the chunks are received. If *stream*=False, data is returned as a single chunk.

If decode_unicode is True, content will be decoded using the best available encoding based on the response.

classmethod from_builtin_response(response)

Create a *b2sdk._internal.requests.NotDecompressingResponse* object from a *requests.Response* object. Don't use *Response.__getstate__* and *Response.__setstate__* because these assume that the content has been consumed, which will never be true in our case.

Parameters**response** (*Response*) –**b2sdk._internal.utils**

```
b2sdk._internal.utils.b2_url_encode(s)
```

URL-encode a unicode string to be sent to B2 in an HTTP header.

Parameters**s** (*str*) – a unicode string to encode**Returns**

URL-encoded string

Return type*str*

b2sdk._internal.utils.b2_url_decode(*s*)
Decode a Unicode string returned from B2 in an HTTP header.

Parameters

s (*str*) – a unicode string to decode

Returns

a Python unicode string.

Return type

str

b2sdk._internal.utils.choose_part_ranges(*content_length*, *minimum_part_size*)
Return a list of (offset, length) for the parts of a large file.

Parameters

- **content_length** (*int*) – content length value
- **minimum_part_size** (*int*) – a minimum file part size

Return type

list

b2sdk._internal.utils.update_digest_from_stream(*digest*, *input_stream*, *content_length*)
Update and return *digest* with data read from *input_stream*

Parameters

- **digest** (*TypeVar(T)*) – a digest object, which exposes an *update(bytes)* method
- **input_stream** (*Any*) – stream object, which exposes a *read(int|None)* method
- **content_length** (*int*) – expected length of the stream

Return type

TypeVar(T)

b2sdk._internal.utils.hex_sha1_of_stream(*input_stream*, *content_length*)
Return the 40-character hex SHA1 checksum of the first *content_length* bytes in the input stream.

Parameters

- **input_stream** (*Any*) – stream object, which exposes *read(int|None)* method
- **content_length** (*int*) – expected length of the stream

Return type

str

class b2sdk._internal.utils.IncrementalHexDigester(*stream*, *digest=<factory>*, *read_bytes=0*,
block_size=1048576)

Bases: *object*

Calculates digest of a stream or parts of it.

stream: *ReadOnlyStream*

digest: *hashlib._Hash*

read_bytes: *int = 0*

block_size: *int = 1048576*

```
property hex_digest: Sha1HexDigest
```

```
update_from_stream(limit=None)
```

Parameters

limit (`Optional[int]`) – How many new bytes try to read from the stream. Default None
– read until nothing left.

Return type

`NewType(Sha1HexDigest, str)`

```
__init__(stream, digest=<factory>, read_bytes=0, block_size=1048576)
```

```
b2sdk._internal.utils.hex_sha1_of_unlimited_stream(input_stream, limit=None)
```

Parameters

- **input_stream** (`Any`) –
- **limit** (`Optional[int]`) –

Return type

`tuple[NewType(Sha1HexDigest, str), int]`

```
b2sdk._internal.utils.hex_sha1_of_file(path_)
```

Return type

`NewType(Sha1HexDigest, str)`

```
b2sdk._internal.utils.hex_sha1_of_bytes(data)
```

Return the 40-character hex SHA1 checksum of the data.

Parameters

data (`bytes`) –

Return type

`NewType(Sha1HexDigest, str)`

```
b2sdk._internal.utils.hex_md5_of_bytes(data)
```

Return the 32-character hex MD5 checksum of the data.

Parameters

data (`bytes`) –

Return type

`str`

```
b2sdk._internal.utils.md5_of_bytes(data)
```

Return the 16-byte MD5 checksum of the data.

Parameters

data (`bytes`) –

Return type

`bytes`

```
b2sdk._internal.utils.b64_of_bytes(data)
```

Return the base64 encoded representation of the data.

Parameters

data (`bytes`) –

Return type`str``b2sdk._internal.utils.validate_b2_file_name(name)`

Raise a ValueError if the name is not a valid B2 file name.

Parameters`name (str)` – a string to check`b2sdk._internal.utils.is_file_readable(local_path, reporter=None)`

Check if the local file has read permissions.

Parameters

- `local_path (str)` – a file path
- `reporter` – reporter object to put errors on

Return type`bool``b2sdk._internal.utils.get_file_mtime(local_path)`

Get modification time of a file in milliseconds.

Parameters`local_path (str)` – a file path**Return type**`int``b2sdk._internal.utils.is_special_file(path)`

Is the path a special file, such as /dev/null or stdout?

Parameters`path (str | Path)` – a “file” path**Return type**`bool`**Returns**

True if the path is a special file

`b2sdk._internal.utils.set_file_mtime(local_path, mod_time_millis)`

Set modification time of a file in milliseconds.

Parameters

- `local_path (str | Path)` – a file path
- `mod_time_millis (int)` – time to be set

Return type`None``b2sdk._internal.utils.fix_windows_path_limit(path)`

Prefix paths when running on Windows to overcome 260 character path length limit. See [https://msdn.microsoft.com/en-us/library/windows/desktop/aa365247\(v=vs.85\).aspx#maxpath](https://msdn.microsoft.com/en-us/library/windows/desktop/aa365247(v=vs.85).aspx#maxpath)

Parameters`path (str)` – a path to prefix**Returns**

a prefixed path

Return type

str

`b2sdk._internal.utils.format_and_scale_number(x, unit)`

Pick a good scale for representing a number and format it.

Parameters

- `x` (`int`) – a number
- `unit` (`str`) – an arbitrary unit name

Returns

scaled and formatted number

Return type

str

`b2sdk._internal.utils.format_and_scale_fraction(numerator, denominator, unit)`

Pick a good scale for representing a fraction, and format it.

Parameters

- `numerator` (`int`) – a numerator of a fraction
- `denominator` (`int`) – a denominator of a fraction
- `unit` (`str`) – an arbitrary unit name

Returns

scaled and formatted fraction

Return type

str

`b2sdk._internal.utils.camelcase_to_underscore(input_)`

Convert a camel-cased string to a string with underscores.

Parameters`input` (`str`) – an input string**Returns**

string with underscores

Return type

str

`class b2sdk._internal.utils.B2TraceMeta(name, bases, attrs, **kwargs)`

Bases: `DefaultTraceMeta`

Trace all public method calls, except for ones with names that begin with `get_`.

`class b2sdk._internal.utils.B2TraceMetaAbstract(name, bases, namespace, /, **kwargs)`

Bases: `DefaultTraceAbstractMeta`

Default class for tracers, to be set as a metaclass for abstract base classes.

`class b2sdk._internal.utils.ConcurrentUsedAuthTokenGuard(lock, token)`

Bases: `object`

Context manager preventing two tokens being used simultaneously. Throws `UploadTokenUsedConcurrently` when unable to acquire a lock. Sample usage:

```
with ConcurrentUsedAuthTokenGuard(lock_for_token, token):
    # code that uses the token exclusively
```

`__init__(lock, token)`

`b2sdk._internal.utils.current_time_millis()`

File times are in integer milliseconds, to avoid roundoff errors.

`b2sdk._internal.utils.iterator_peek(iterator, count)`

Get up to the *count* first elements yielded by *iterator*.

The function will read *count* elements from *iterator* or less if the end is reached first. Returns a tuple consisting of a list of retrieved elements and an iterator equivalent to the input iterator.

Parameters

- `iterator (Iterator[TypeVar(T)])` –
- `count (int)` –

Return type

`tuple[list[TypeVar(T)], Iterator[TypeVar(T)]]`

`b2sdk._internal.cache`

`class b2sdk._internal.cache.AbstractCache`

Bases: `object`

`clear()`

`abstract get_bucket_id_or_none_from_bucket_name(name)`

`abstract get_bucket_name_or_none_from_allowed()`

`abstract get_bucket_name_or_none_from_bucket_id(bucket_id)`

Parameters

`bucket_id (str)` –

Return type

`Optional[str]`

`abstract list_bucket_names_ids()`

List buckets in the cache.

Return type

`list[tuple[str, str]]`

Returns

list of tuples (bucket_name, bucket_id)

`abstract save_bucket(bucket)`

`abstract set_bucket_name_cache(buckets)`

`class b2sdk._internal.cache.DummyCache`

Bases: `AbstractCache`

A cache that does nothing.

`get_bucket_id_or_none_from_bucket_name(name)`

```

get_bucket_name_or_none_from_bucket_id(bucket_id)
    Parameters
        bucket_id (str) –
    Return type
        Optional[str]

get_bucket_name_or_none_from_allowed()

list_bucket_names_ids()
    List buckets in the cache.

    Returns
        list of tuples (bucket_name, bucket_id)

save_bucket(bucket)
set_bucket_name_cache(buckets)

class b2sdk._internal.cache.InMemoryCache
    Bases: AbstractCache
    A cache that stores the information in memory.

__init__()
get_bucket_id_or_none_from_bucket_name(name)
get_bucket_name_or_none_from_bucket_id(bucket_id)
    Parameters
        bucket_id (str) –
    Return type
        Optional[str]
get_bucket_name_or_none_from_allowed()

list_bucket_names_ids()
    List buckets in the cache.

    Returns
        list of tuples (bucket_name, bucket_id)

Return type
        list[tuple[str, str]]

save_bucket(bucket)
set_bucket_name_cache(buckets)

class b2sdk._internal.cache.AuthInfoCache(info)
    Bases: AbstractCache
    A cache that stores data persistently in StoredAccountInfo.

    Parameters
        info (AbstractAccountInfo) –

```

```
__init__(info)
    Parameters
        info (AbstractAccountInfo) –
    get_bucket_id_or_none_from_bucket_name(name)
    get_bucket_name_or_none_from_bucket_id(bucket_id)

    Return type
        Optional[str]
get_bucket_name_or_none_from_allowed()
list_bucket_names_ids()
    List buckets in the cache.

    Return type
        list[tuple[str, str]]
Returns
    list of tuples (bucket_name, bucket_id)
save_bucket(bucket)
set_bucket_name_cache(buckets)
```

b2sdk._internal.stream.chained ChainedStream

```
class b2sdk._internal.stream.chained.ChainedStream(stream_openers)
    Bases: ReadOnlyStreamMixin, IOBase
    Chains multiple streams in single stream, sort of what itertools.chain does for iterators.
    Cleans up buffers of underlying streams when closed.
    Can be seeked to beginning (when retrying upload, for example). Closes underlying streams as soon as they reaches EOF, but clears their buffers when the chained stream is closed for underlying streams that follow b2sdk.v2.StreamOpener cleanup interface, for example b2sdk.v2.CachedBytesStreamOpener
__init__(stream_openers)
    Parameters
        stream_openeres (list) – list of callables that return opened streams
property stream
    Return currently processed stream.
seekable()
    Return whether object supports random access.
    If False, seek(), tell() and truncate() will raise OSError. This method may need to do a test seek().
tell()
    Return current stream position.
seek(pos, whence=0)
    Resets stream to the beginning.

    Parameters
```

- **pos** (*int*) – only allowed value is 0
- **whence** (*int*) – only allowed value is 0

readable()

Return whether object was opened for reading.

If False, read() will raise OSError.

read(*size=None*)

Read at most *size* bytes from underlying streams, or all available data, if *size* is None or negative. Open the streams only when their data is needed, and possibly leave them open and part-way read for further reading - by subsequent calls to this method.

Parameters

size (*int*, *None*) – number of bytes to read. If omitted, *None*, or negative data is read and returned until EOF from final stream is reached

Returns

data read from the stream

close()

Flush and close the IO object.

This method has no effect if the file is already closed.

class b2sdk._internal.stream.chained.StreamOpener

Bases: *object*

Abstract class to define stream opener with cleanup.

cleanup()

Clean up stream opener after chained stream closes.

Can be used for cleaning cached data that are stored in memory to allow resetting chained stream without getting this data more than once, eg. data downloaded from external source.

b2sdk._internal.stream.hashing StreamWithHash**class b2sdk._internal.stream.hashing.StreamWithHash(*stream*, *stream_length=None*)**

Bases: *ReadOnlyStreamMixin*, *StreamWithLengthWrapper*

Wrap a file-like object, calculates SHA1 while reading and appends hash at the end.

__init__ (*stream*, *stream_length=None*)**Parameters**

stream – the stream to read from

seek(*pos*, *whence=0*)

Seek to a given position in the stream.

Parameters

pos (*int*) – position in the stream

read(*size=None*)

Read data from the stream.

Parameters

size (*int*) – number of bytes to read

Returns

read data

Return type

bytes|None

`classmethod get_digest()`

b2sdk._internal.stream.progress Streams with progress reporting

`class b2sdk._internal.stream.progress.AbstractStreamWithProgress(stream, progress_listener, offset=0)`

Bases: `StreamWrapper`

Wrap a file-like object and updates a ProgressListener as data is read / written. In the abstract class, read and write methods do not update the progress - child classes shall do it.

`__init__(stream, progress_listener, offset=0)`

Parameters

- `stream` – the stream to read from or write to
- `progress_listener` (`b2sdk.v2.AbstractProgressListener`) – the listener that we tell about progress
- `offset` (`int`) – the starting byte offset in the file

`class b2sdk._internal.stream.progress.ReadingStreamWithProgress(*args, **kwargs)`

Bases: `AbstractStreamWithProgress`

Wrap a file-like object, updates progress while reading.

`__init__(*args, **kwargs)`

Parameters

- `stream` – the stream to read from or write to
- `progress_listener` (`b2sdk.v2.AbstractProgressListener`) – the listener that we tell about progress
- `offset` (`int`) – the starting byte offset in the file

`read(size=None)`

Read data from the stream.

Parameters

`size` (`int`) – number of bytes to read

Returns

data read from the stream

`seek(pos, whence=0)`

Seek to a given position in the stream.

Parameters

`pos` (`int`) – position in the stream

Returns

new absolute position

Return type`int`

```
class b2sdk._internal.stream.progress.WritingStreamWithProgress(stream, progress_listener,  
offset=0)
```

Bases: *AbstractStreamWithProgress*

Wrap a file-like object; updates progress while writing.

write(*data*)

Write data to the stream.

Parameters

`data (bytes)` – data to write to the stream

b2sdk._internal.stream.range RangeOfInputStream

```
class b2sdk._internal.stream.range.RangeOfInputStream(stream, offset, length)
```

Bases: *ReadOnlyStreamMixin, StreamWithLengthWrapper*

Wrap a file-like object (read only) and read the selected range of the file.

__init__(*stream, offset, length*)**Parameters**

- `stream` – a seekable stream
- `offset (int)` – offset in the stream
- `length (int)` – max number of bytes to read

seek(*pos, whence=0*)

Seek to a given position in the stream.

Parameters

`pos (int)` – position in the stream relative to steam offset

Returns

new position relative to stream offset

Return type`int`**tell()**

Return current stream position relative to offset.

Return type`int`**read(*size=None*)**

Read data from the stream.

Parameters

`size (int)` – number of bytes to read

Returns

data read from the stream

Return type`bytes`

close()

Flush and close the IO object.

This method has no effect if the file is already closed.

b2sdk._internal.stream.range.wrap_with_range(stream, stream_length, range_offset, range_length)

b2sdk._internal.stream.wrapper StreamWrapper

class b2sdk._internal.stream.wrapper.StreamWrapper(stream)

Bases: `I0Base`

Wrapper for a file-like object.

__init__(stream)**Parameters**

`stream` – the stream to read from or write to

seekable()

Return whether object supports random access.

If False, seek(), tell() and truncate() will raise OSError. This method may need to do a test seek().

seek(pos, whence=0)

Seek to a given position in the stream.

Parameters

`pos` (`int`) – position in the stream

Returns

new absolute position

Return type

`int`

tell()

Return current stream position.

Return type

`int`

truncate(size=None)

Truncate file to size bytes.

File pointer is left unchanged. Size defaults to the current IO position as reported by tell(). Return the new size.

flush()

Flush the stream.

readable()

Return whether object was opened for reading.

If False, read() will raise OSError.

read(size=None)

Read data from the stream.

Parameters

`size` (`int`) – number of bytes to read

Returns

data read from the stream

writable()

Return whether object was opened for writing.

If False, write() will raise OSError.

write(data)

Write data to the stream.

Parameters

data – a data to write to the stream

class b2sdk._internal.stream.wrapper.StreamWithLengthWrapper(stream, length=None)

Bases: *StreamWrapper*

Wrapper for a file-like object that supports `__len__` interface

__init__(stream, length=None)**Parameters**

- **stream** – the stream to read from or write to
- **length** (*int*) – length of the stream

b2sdk._internal.scan.folder_parser

b2sdk._internal.scan.folder_parser.parse_folder(folder_name, api, local_folder_class=<class 'b2sdk._internal.scan.folder.LocalFolder'>, b2_folder_class=<class 'b2sdk._internal.scan.folder.B2Folder'>)

Take either a local path, or a B2 path, and returns a Folder object for it.

B2 paths look like: b2://bucketName/path/name. The ‘//’ is optional.

Anything else is treated like a local folder.

Parameters

- **folder_name** (*str*) – a name of the folder, either local or remote
- **api** (*B2Api*) – an API object
- **local_folder_class** (~*b2sdk.v2.AbstractFolder*) – class to handle local folders
- **b2_folder_class** (~*b2sdk.v2.AbstractFolder*) – class to handle B2 folders

b2sdk._internal.scan.folder

class b2sdk._internal.scan.folder.AbstractFolder

Bases: *object*

Interface to a folder full of files, which might be a B2 bucket, a virtual folder in a B2 bucket, or a directory on a local file system.

Files in B2 may have multiple versions, while files in local folders have just one.

```
abstract all_files(reporter, policies_manager=<b2sdk._internal.scan.policies.ScanPoliciesManager object>)
```

Return an iterator over all of the files in the folder, in the order that B2 uses.

It also performs filtering using policies manager.

No matter what the folder separator on the local file system is, “/” is used in the returned file names.

If a file is found, but does not exist (for example due to a broken symlink or a race), reporter will be informed about each such problem.

Parameters

- **reporter** (`Optional[ProgressReport]`) – a place to report errors
- **policies_manager** – a policies manager object

Return type

`Iterator[AbstractPath]`

```
abstract folder_type()
```

Return one of: ‘b2’, ‘local’.

Return type

`str`

```
abstract make_full_path(file_name)
```

Return the full path to the file.

Parameters

- **file_name** (`str`) – a file name

Return type

`str`

```
b2sdk._internal.scan.folder.join_b2_path(relative_dir_path, file_name)
```

Like `os.path.join`, but for B2 file names where the root directory is called “.”.

Parameters

- **relative_dir_path** (`str | Path`) –
- **file_name** (`str`) –

```
class b2sdk._internal.scan.folder.LocalFolder(root)
```

Bases: `AbstractFolder`

Folder interface to a directory on the local machine.

Parameters

`root` (`str | Path`) –

```
_init__(root)
```

Initialize a new folder.

Parameters

`root` (`str | Path`) – path to the root of the local folder. Must be unicode.

```
folder_type()
```

Return folder type.

Return type

`str`

all_files(*reporter*, *policies_manager*=<*b2sdk._internal.scan.policies.ScanPoliciesManager* object>)

Yield all files.

Parameters

- **reporter** (`Optional[ProgressReport]`) – a place to report errors
- **policies_manager** – a policy manager object, default is `DEFAULT_SCAN_MANAGER`

Return type

`Iterator[LocalPath]`

make_full_path(*file_name*)

Convert a file name into an absolute path, ensure it is not outside self.root

Parameters

- **file_name** (`str`) – a file name

ensure_present()

Make sure that the directory exists.

ensure_non_empty()

Make sure that the directory exists and is non-empty.

`b2sdk._internal.scan.folder.b2_parent_dir(file_name)`

class b2sdk._internal.scan.folder.B2Folder(*bucket_name*, *folder_name*, *api*)

Bases: `AbstractFolder`

Folder interface to b2.

__init__(*bucket_name*, *folder_name*, *api*)

Parameters

- **bucket_name** (`str`) – a name of the bucket
- **folder_name** (`str`) – a folder name
- **api** (`b2sdk._internal.api.B2Api`) – an API object

all_files(*reporter*, *policies_manager*=<*b2sdk._internal.scan.policies.ScanPoliciesManager* object>)

Yield all files.

Parameters

- **reporter** (`Optional[ProgressReport]`) –
- **policies_manager** (`ScanPoliciesManager`) –

Return type

`Iterator[B2Path]`

get_file_versions()

folder_type()

Return folder type.

Return type

`str`

make_full_path(file_name)
Make an absolute path from a file name.

Parameters
file_name (`str`) – a file name

b2sdk._internal.scan.path

class b2sdk._internal.scan.path.AbstractPath(relative_path, mod_time, size)

Bases: `ABC`

Represent a path in a source or destination folder - be it B2 or local

Parameters

- **relative_path** (`str`) –
- **mod_time** (`int`) –
- **size** (`int`) –

__init__(relative_path, mod_time, size)

Parameters

- **relative_path** (`str`) –
- **mod_time** (`int`) –
- **size** (`int`) –

abstract is_visible()

Is the path visible/not deleted on it's storage

Return type
`bool`

class b2sdk._internal.scan.path.LocalPath.absolute_path, relative_path, mod_time, size)

Bases: `AbstractPath`

Parameters

- **absolute_path** (`str`) –
- **relative_path** (`str`) –
- **mod_time** (`int`) –
- **size** (`int`) –

__init__(absolute_path, relative_path, mod_time, size)

Parameters

- **absolute_path** (`str`) –
- **relative_path** (`str`) –
- **mod_time** (`int`) –
- **size** (`int`) –

absolute_path

is_visible()

Is the path visible/not deleted on it's storage

Return type

`bool`

relative_path**mod_time****size**

```
class b2sdk._internal.scan.path.B2Path(relative_path, selected_version, all_versions)
```

Bases: *AbstractPath*

Parameters

- **relative_path** (`str`) –
- **selected_version** (`FileVersion`) –
- **all_versions** (`list[FileVersion]`) –

```
__init__(relative_path, selected_version, all_versions)
```

Parameters

- **relative_path** (`str`) –
- **selected_version** (`FileVersion`) –
- **all_versions** (`list[FileVersion]`) –

selected_version**all_versions****relative_path****is_visible()**

Is the path visible/not deleted on it's storage

Return type

`bool`

property mod_time: int

property size: int

```
b2sdk._internal.scan.policies
```

```
class b2sdk._internal.scan.policies.RegexSet(regex_iterable)
```

Bases: `object`

Hold a (possibly empty) set of regular expressions and know how to check whether a string matches any of them.

```
__init__(regex_iterable)
```

Parameters

regex_iterable – an interable which yields regexes

matches(*s*)

Check whether a string matches any of regular expressions.

Parameters

s (*str*) – a string to check

Return type

bool

b2sdk._internal.scan.policies.convert_dir_regex_to_dir_prefix_regex(*dir_regex*)

The patterns used to match directory names (and file names) are allowed to match a prefix of the name. This ‘feature’ was unintentional, but is being retained for compatibility.

This means that a regex that matches a directory name can’t be used directly to match against a file name and test whether the file should be excluded because it matches the directory.

The pattern ‘photos’ will match directory names ‘photos’ and ‘photos2’, and should exclude files ‘photos/kitten.jpg’, and ‘photos2/puppy.jpg’. It should not exclude ‘photos.txt’, because there is no directory name that matches.

On the other hand, the pattern ‘photos\$’ should match ‘photos/kitten.jpg’, but not ‘photos2/puppy.jpg’, nor ‘photos.txt’

If the original regex is valid, there are only two cases to consider: either the regex ends in ‘\$’ or does not.

Parameters

dir_regex (*str* | *Pattern*) – a regular expression string or literal

Return type

str

Returns

a regular expression string which matches the directory prefix

class b2sdk._internal.scan.policies.IntegerRange(*begin, end*)

Bases: *object*

Hold a range of two integers. If the range value is None, it indicates that the value should be treated as -Inf (for begin) or +Inf (for end).

__init__(*begin, end*)**Parameters**

- **begin** (*int*) – begin position of the range (included)
- **end** (*int*) – end position of the range (included)

class b2sdk._internal.scan.policies.ScanPoliciesManager(*exclude_dir_regexes=(), exclude_file_regexes=(), include_file_regexes=(), exclude_all_symlinks=False, exclude_modified_before=None, exclude_modified_after=None, exclude_uploaded_before=None, exclude_uploaded_after=None*)

Bases: *object*

Policy object used when scanning folders, used to decide which files to include in the list of files.

Code that scans through files should at least use `should_exclude_file()` to decide whether each file should be included; it will check include/exclude patterns for file names, as well as patterns for excluding directories.

Code that scans may optionally use `should_exclude_directory()` to test whether it can skip a directory completely and not bother listing the files and sub-directories in it.

Parameters

- `exclude_dir_regexes` (`Iterable[str | Pattern]`) –
 - `exclude_file_regexes` (`Iterable[str | Pattern]`) –
 - `include_file_regexes` (`Iterable[str | Pattern]`) –
 - `exclude_all_symlinks` (`bool`) –
 - `exclude_modified_before` (`Optional[int]`) –
 - `exclude_modified_after` (`Optional[int]`) –
 - `exclude_uploaded_before` (`Optional[int]`) –
 - `exclude_uploaded_after` (`Optional[int]`) –
- ```
__init__(exclude_dir_regexes=(), exclude_file_regexes=(), include_file_regexes=(),
 exclude_all_symlinks=False, exclude_modified_before=None, exclude_modified_after=None,
 exclude_uploaded_before=None, exclude_uploaded_after=None)
```

#### Parameters

- `exclude_dir_regexes` (`Iterable[str | Pattern]`) – regexes to exclude directories
- `exclude_file_regexes` (`Iterable[str | Pattern]`) – regexes to exclude files
- `include_file_regexes` (`Iterable[str | Pattern]`) – regexes to include files
- `exclude_all_symlinks` (`bool`) – if True, exclude all symlinks
- `exclude_modified_before` (`Optional[int]`) – optionally exclude file versions (both local and b2) modified before (in millis)
- `exclude_modified_after` (`Optional[int]`) – optionally exclude file versions (both local and b2) modified after (in millis)
- `exclude_uploaded_before` (`Optional[int]`) – optionally exclude b2 file versions uploaded before (in millis)
- `exclude_uploaded_after` (`Optional[int]`) – optionally exclude b2 file versions uploaded after (in millis)

The regex matching priority for a given path is: 1) the path is always excluded if it's dir matches `exclude_dir_regexes`, if not then 2) the path is always included if it matches `include_file_regexes`, if not then 3) the path is excluded if it matches `exclude_file_regexes`, if not then 4) the path is included

#### `should_exclude_local_path(local_path)`

Whether a local path should be excluded from the scan or not.

This method assumes that the directory holding the `path_` has already been checked for exclusion.

#### Parameters

- `local_path` (`LocalPath`) –

#### `should_exclude_b2_file_version(file_version, relative_path)`

Whether a b2 file version should be excluded from the scan or not.

This method assumes that the directory holding the `path_` has already been checked for exclusion.

#### Parameters

- `file_version` (`FileVersion`) –

- **relative\_path** (`str`) –

**should\_exclude\_b2\_directory**(*dir\_path*)

Given the path of a directory, relative to the scan point, decide if all of the files in it should be excluded from the scan.

**Parameters**

**dir\_path** (`str`) –

**should\_exclude\_local\_directory**(*dir\_path*)

Given the path of a directory, relative to the scan point, decide if all of the files in it should be excluded from the scan.

**Parameters**

**dir\_path** (`str`) –

**b2sdk.\_internal.scan.scan**

**b2sdk.\_internal.scan.scan.zip\_folders**(*folder\_a*, *folder\_b*, *reporter*, *policies\_manager*=<*b2sdk.\_internal.scan.policies.ScanPoliciesManager object*>)

Iterate over all of the files in the union of two folders, matching file names.

Each item is a pair (file\_a, file\_b) with the corresponding file in both folders. Either file (but not both) will be None if the file is in only one folder.

**Parameters**

- **folder\_a** (`AbstractFolder`) – first folder object.
- **folder\_b** (`AbstractFolder`) – second folder object.
- **reporter** (`ProgressReport`) – reporter object
- **policies\_manager** (`ScanPoliciesManager`) – policies manager object
- **folder\_a** –
- **folder\_b** –

**Return type**

`tuple[Optional[AbstractPath], Optional[AbstractPath]]`

**Returns**

yields two element tuples

**class b2sdk.\_internal.scan.scan.AbstractScanResult**

Bases: `object`

Some attributes of files which are meaningful for monitoring and troubleshooting.

**abstract classmethod from\_files**(\*files)

**Parameters**

**files** (`Optional[AbstractPath]`) –

**Return type**

`AbstractScanResult`

`__init__()`

```
class b2sdk._internal.scan.scan.AbstractScanReport
```

Bases: `object`

Aggregation of valuable information about files after scanning.

`SCAN_RESULT_CLASS`

alias of `AbstractScanResult`

`abstract add(*files)`

**Parameters**

`files (Optional[AbstractPath]) –`

**Return type**

`None`

`__init__()`

```
class b2sdk._internal.scan.scan.CountAndSampleScanReport(counter_by_status=<factory>,
 samples_by_status_first=<factory>,
 samples_by_status_last=<factory>)
```

Bases: `AbstractScanReport`

Scan report which groups and counts files by their `AbstractScanResult` and also stores first and last seen examples of such files.

**Parameters**

- `counter_by_status (Counter) –`
- `samples_by_status_first (dict[AbstractScanResult, tuple[FileVersion, ...]]) –`
- `samples_by_status_last (dict[AbstractScanResult, tuple[FileVersion, ...]]) –`

`counter_by_status: Counter`

`samples_by_status_first: dict[AbstractScanResult, tuple[FileVersion, ...]]`

`samples_by_status_last: dict[AbstractScanResult, tuple[FileVersion, ...]]`

`add(*files)`

**Parameters**

`files (Optional[AbstractPath]) –`

**Return type**

`None`

`__init__(counter_by_status=<factory>, samples_by_status_first=<factory>,
 samples_by_status_last=<factory>)`

**Parameters**

- `counter_by_status (Counter) –`
- `samples_by_status_first (dict[AbstractScanResult, tuple[FileVersion, ...]]) –`
- `samples_by_status_last (dict[AbstractScanResult, tuple[FileVersion, ...]]) –`

**b2sdk.\_internal.sync.action****class b2sdk.\_internal.sync.action.AbstractAction**Bases: `object`

An action to take, such as uploading, downloading, or deleting a file. Multi-threaded tasks create a sequence of Actions which are then run by a pool of threads.

An action can depend on other actions completing. An example of this is making sure a CreateBucketAction happens before an UploadFileAction.

**run(bucket, reporter, dry\_run=False)**

Main action routine.

**Parameters**

- **bucket** (`b2sdk._internal.bucket.Bucket`) – a Bucket object
- **reporter** (`ProgressReport`) – a place to report errors
- **dry\_run** (`bool`) – if True, perform a dry run

**abstract get\_bytes()**

Return the number of bytes to transfer for this action.

**Return type**`int`**abstract do\_action(bucket, reporter)**

Perform the action, returning only after the action is completed.

**Parameters**

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`ProgressReport`) – a place to report errors

**Return type**`None`**abstract do\_report(bucket, reporter)**

Report the action performed.

**Parameters**

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`ProgressReport`) – a place to report errors

**Return type**`None`**class b2sdk.\_internal.sync.action.B2UploadAction(local\_full\_path, relative\_name, b2\_file\_name, mod\_time\_millis, size, encryption\_settings\_provider)**Bases: `AbstractAction`

File uploading action.

**Parameters**

- **local\_full\_path** (`str`) –
- **relative\_name** (`str`) –

- **b2\_file\_name** (`str`) –
- **mod\_time\_millis** (`int`) –
- **size** (`int`) –
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`) –

**\_\_init\_\_**(*local\_full\_path*, *relative\_name*, *b2\_file\_name*, *mod\_time\_millis*, *size*, *encryption\_settings\_provider*)

#### Parameters

- **local\_full\_path** (`str`) – a local file path
- **relative\_name** (`str`) – a relative file name
- **b2\_file\_name** (`str`) – a name of a new remote file
- **mod\_time\_millis** (`int`) – file modification time in milliseconds
- **size** (`int`) – a file size
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`) – encryption setting provider

#### **get\_bytes()**

Return file size.

##### Return type

`int`

#### **get\_all\_sources()**

Get list of sources required to complete this upload

##### Return type

`list[OutboundTransferSource]`

#### **do\_action(bucket, reporter)**

Perform the uploading action, returning only after the action is completed.

#### Parameters

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`ProgressReport`) – a place to report errors

##### Return type

`None`

#### **do\_report(bucket, reporter)**

Report the uploading action performed.

#### Parameters

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`ProgressReport`) – a place to report errors

##### Return type

`None`

```
class b2sdk._internal.sync.action.B2IncrementalUploadAction(local_full_path, relative_name,
 b2_file_name, mod_time_millis, size,
 encryption_settings_provider,
 file_version=None,
 absolute_minimum_part_size=None)
```

Bases: *B2UploadAction*

#### Parameters

- **local\_full\_path** (`str`) –
- **relative\_name** (`str`) –
- **b2\_file\_name** (`str`) –
- **mod\_time\_millis** (`int`) –
- **size** (`int`) –
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`) –
- **file\_version** (`Optional[FileVersion]`) –
- **absolute\_minimum\_part\_size** (`Optional[int]`) –

```
__init__(local_full_path, relative_name, b2_file_name, mod_time_millis, size, encryption_settings_provider,
 file_version=None, absolute_minimum_part_size=None)
```

#### Parameters

- **local\_full\_path** (`str`) – a local file path
- **relative\_name** (`str`) – a relative file name
- **b2\_file\_name** (`str`) – a name of a new remote file
- **mod\_time\_millis** (`int`) – file modification time in milliseconds
- **size** (`int`) – a file size
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`) – encryption setting provider
- **file\_version** (`Optional[FileVersion]`) – version of file currently on the server
- **absolute\_minimum\_part\_size** (`Optional[int]`) – minimum file part size for large files

**get\_all\_sources()**

Get list of sources required to complete this upload

#### Return type

`list[OutboundTransferSource]`

```
class b2sdk._internal.sync.action.B2HideAction(relative_name, b2_file_name)
```

Bases: *AbstractAction*

#### Parameters

- **relative\_name** (`str`) –
- **b2\_file\_name** (`str`) –

```
__init__(relative_name, b2_file_name)
```

#### Parameters

- **relative\_name** (`str`) – a relative file name

- **b2\_file\_name** (`str`) – a name of a remote file

**get\_bytes()**

Return file size.

**Returns**

always zero

**Return type**

`int`

**do\_action(bucket, reporter)**

Perform the hiding action, returning only after the action is completed.

**Parameters**

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`ProgressReport`) – a place to report errors

**Return type**

`None`

**do\_report(bucket, reporter)**

Report the hiding action performed.

**Parameters**

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`SyncReport`) – a place to report errors

```
class b2sdk._internal.sync.action.B2DownloadAction(source_path, b2_file_name, local_full_path,
 encryption_settings_provider)
```

Bases: *AbstractAction*

**Parameters**

- **source\_path** (`B2Path`) –
- **b2\_file\_name** (`str`) –
- **local\_full\_path** (`str`) –
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`) –

**\_\_init\_\_(source\_path, b2\_file\_name, local\_full\_path, encryption\_settings\_provider)****Parameters**

- **source\_path** (`B2Path`) – the file to be downloaded
- **b2\_file\_name** (`str`) – b2\_file\_name
- **local\_full\_path** (`str`) – a local file path
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`) – encryption setting provider

**get\_bytes()**

Return file size.

**Return type**

`int`

**do\_action**(*bucket, reporter*)

Perform the downloading action, returning only after the action is completed.

**Parameters**

- **bucket** (*Bucket*) – a Bucket object
- **reporter** (*ProgressReport*) – a place to report errors

**Return type***None***do\_report**(*bucket, reporter*)

Report the downloading action performed.

**Parameters**

- **bucket** (*Bucket*) – a Bucket object
- **reporter** (*ProgressReport*) – a place to report errors

**Return type***None***class** b2sdk.\_internal.sync.action.**B2CopyAction**(*b2\_file\_name, source\_path, dest\_b2\_file\_name, source\_bucket, destination\_bucket, encryption\_settings\_provider*)Bases: *AbstractAction*

File copying action.

**Parameters**

- **b2\_file\_name** (*str*) –
- **source\_path** (*B2Path*) –
- **source\_bucket** (*Bucket*) –
- **destination\_bucket** (*Bucket*) –
- **encryption\_settings\_provider** (*AbstractSyncEncryptionSettingsProvider*) –

**\_\_init\_\_**(*b2\_file\_name, source\_path, dest\_b2\_file\_name, source\_bucket, destination\_bucket, encryption\_settings\_provider*)**Parameters**

- **b2\_file\_name** (*str*) – a *b2\_file\_name*
- **source\_path** (*B2Path*) – the file to be copied
- **dest\_b2\_file\_name** – a name of a destination remote file
- **source\_bucket** (*Bucket*) – bucket to copy from
- **destination\_bucket** (*Bucket*) – bucket to copy to
- **encryption\_settings\_provider** (*AbstractSyncEncryptionSettingsProvider*) – encryption setting provider

**get\_bytes()**

Return file size.

**Return type***int*

**do\_action**(*bucket, reporter*)

Perform the copying action, returning only after the action is completed.

**Parameters**

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`ProgressReport`) – a place to report errors

**Return type**

`None`

**do\_report**(*bucket, reporter*)

Report the copying action performed.

**Parameters**

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`ProgressReport`) – a place to report errors

**Return type**

`None`

**class b2sdk.\_internal.sync.action.B2DeleteAction(*relative\_name, b2\_file\_name, file\_id, note*)**

Bases: `AbstractAction`

**Parameters**

- **relative\_name** (`str`) –
- **b2\_file\_name** (`str`) –
- **file\_id** (`str`) –
- **note** (`str`) –

**\_\_init\_\_(*relative\_name, b2\_file\_name, file\_id, note*)****Parameters**

- **relative\_name** (`str`) – a relative file name
- **b2\_file\_name** (`str`) – a name of a remote file
- **file\_id** (`str`) – a file ID
- **note** (`str`) – a deletion note

**get\_bytes()**

Return file size.

**Return type**

`int`

**Returns**

always zero

**do\_action**(*bucket, reporter*)

Perform the deleting action, returning only after the action is completed.

**Parameters**

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`ProgressReport`) – a place to report errors

```
do_report(bucket, reporter)
Report the deleting action performed.
```

**Parameters**

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`SyncReport`) – a place to report errors

```
class b2sdk._internal.sync.action.LocalDeleteAction(relative_name, full_path)
```

Bases: `AbstractAction`

**Parameters**

- **relative\_name** (`str`) –
- **full\_path** (`str`) –

```
__init__(relative_name, full_path)
```

**Parameters**

- **relative\_name** (`str`) – a relative file name
- **full\_path** (`str`) – a full local path

```
get_bytes()
```

Return file size.

**Return type**

`int`

**Returns**

always zero

```
do_action(bucket, reporter)
```

Perform the deleting of a local file action, returning only after the action is completed.

**Parameters**

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`ProgressReport`) – a place to report errors

```
do_report(bucket, reporter)
```

Report the deleting of a local file action performed.

**Parameters**

- **bucket** (`Bucket`) – a Bucket object
- **reporter** (`SyncReport`) – a place to report errors

```
b2sdk._internal.sync.exception
```

```
exception b2sdk._internal.sync.exception.IncompleteSync(*args, **kwargs)
```

Bases: `B2SimpleError`

**b2sdk.\_internal.sync.policy**

```
class b2sdk._internal.sync.policy.NewerFileSyncMode(value, names=None, *values, module=None,
qualname=None, type=None, start=1,
boundary=None)
```

Bases: `Enum`

Mode of handling files newer on destination than on source

**SKIP = 101**

skip syncing such file

**REPLACE = 102**

replace the file on the destination with the (older) file on source

**RAISE\_ERROR = 103**

raise a non-transient error, failing the sync operation

```
class b2sdk._internal.sync.policy.CompareVersionMode(value, names=None, *values, module=None,
qualname=None, type=None, start=1,
boundary=None)
```

Bases: `Enum`

Mode of comparing versions of files to determine what should be synced and what shouldn't

**MODTIME = 201**

use file modification time on source filesystem

**SIZE = 202**

compare using file size

**NONE = 203**

compare using file name only

```
class b2sdk._internal.sync.policy.AbstractFileSyncPolicy(source_path, source_folder, dest_path,
dest_folder, now_millis, keep_days,
newer_file_mode, compare_threshold,
com-
pare_version_mode=CompareVersionMode.MODTIME,
encryp-
tion_settings_provider=<b2sdk._internal.sync.encryption_p
object>,
upload_mode=UploadMode.FULL,
absolute_minimum_part_size=None)
```

Bases: `object`

Abstract policy class.

#### Parameters

- **source\_path** (`Optional[AbstractPath]`) –
- **source\_folder** (`AbstractFolder`) –
- **dest\_path** (`Optional[AbstractPath]`) –
- **dest\_folder** (`AbstractFolder`) –
- **now\_millis** (`int`) –
- **keep\_days** (`int`) –

- **newer\_file\_mode** (*NewerFileSyncMode*) –
  - **compare\_threshold** (*int*) –
  - **compare\_version\_mode** (*CompareVersionMode*) –
  - **encryption\_settings\_provider** (*AbstractSyncEncryptionSettingsProvider*) –
  - **upload\_mode** (*UploadMode*) –
  - **absolute\_minimum\_part\_size** (*Optional[int]*) –

**DESTINATION\_PREFIX** = NotImplemented

SOURCE\_PREFIX = NotImplemented

```
__init__(source_path, source_folder, dest_path, dest_folder, now_millis, keep_days, newer_file_mode,
 compare_threshold, compare_version_mode=CompareVersionMode.MODTIME, encryption_settings_provider=<b2sdk._internal.sync.encryption_provider.ServerDefaultSyncEncryptionSettingsProvider object>, upload_mode=UploadMode.FULL, absolute_minimum_part_size=None)
```

## Parameters

- **source\_path** (`Optional[AbstractPath]`) – source file object
  - **source\_folder** (`AbstractFolder`) – source folder object
  - **dest\_path** (`Optional[AbstractPath]`) – destination file object
  - **dest\_folder** (`AbstractFolder`) – destination folder object
  - **now\_millis** (`int`) – current time in milliseconds
  - **keep\_days** (`int`) – days to keep before delete
  - **newer\_file\_mode** (`NewerFileSyncMode`) – setting which determines handling for destination files newer than on the source
  - **compare\_threshold** (`int`) – when comparing with size or time for sync
  - **compare\_version\_mode** (`CompareVersionMode`) – how to compare source and destination files
  - **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`)
    - encryption setting provider
  - **upload\_mode** (`UploadMode`) – file upload mode
  - **absolute\_minimum\_part\_size** (`Optional[int]`) – minimum file part size that can be uploaded to the server

```
classmethod files_are_different(source_path, dest_path, compare_threshold=None,
 compare_version_mode=CompareVersionMode.MODTIME,
 newer_file_mode=NewerFileSyncMode.RAISE_ERROR)
```

Compare two files and determine if the destination file should be replaced by the source file.

## Parameters

- **source\_path** (*AbstractPath*) – source file object
  - **dest\_path** (*AbstractPath*) – destination file object
  - **compare\_threshold** (*Optional[int]*) – compare threshold when comparing by time or size

- `compare_version_mode` (`CompareVersionMode`) – source file version comparator method
- `newer_file_mode` (`NewerFileSyncMode`) – newer destination handling method
- `source_path` –
- `dest_path` –
- `compare_threshold` –
- `compare_version_mode` –
- `newer_file_mode` –

`get_all_actions()`

Yield file actions.

```
class b2sdk._internal.sync.policy.DownPolicy(source_path, source_folder, dest_path, dest_folder,
 now_millis, keep_days, newer_file_mode,
 compare_threshold, compare_version_mode=CompareVersionMode.MODTIME,
 encryption_settings_provider=<b2sdk._internal.sync.encryption_provider.ServerD...
 object>, upload_mode=UploadMode.FULL,
 absolute_minimum_part_size=None)
```

Bases: `AbstractFileSyncPolicy`

File is synced down (from the cloud to disk).

**Parameters**

- `source_path` (`Optional[AbstractPath]`) –
- `source_folder` (`AbstractFolder`) –
- `dest_path` (`Optional[AbstractPath]`) –
- `dest_folder` (`AbstractFolder`) –
- `now_millis` (`int`) –
- `keep_days` (`int`) –
- `newer_file_mode` (`NewerFileSyncMode`) –
- `compare_threshold` (`int`) –
- `compare_version_mode` (`CompareVersionMode`) –
- `encryption_settings_provider` (`AbstractSyncEncryptionSettingsProvider`) –
- `upload_mode` (`UploadMode`) –
- `absolute_minimum_part_size` (`Optional[int]`) –

```
DESTINATION_PREFIX = 'local://'
SOURCE_PREFIX = 'b2://'
```

```
class b2sdk._internal.sync.policy.UpPolicy(source_path, source_folder, dest_path, dest_folder,
 now_millis, keep_days, newer_file_mode,
 compare_threshold,
 compare_version_mode=CompareVersionMode.MODTIME,
 encrypt-
 tion_settings_provider=<b2sdk._internal.sync.encryption_provider.ServerDefa
object>, upload_mode=UploadMode.FULL,
 absolute_minimum_part_size=None)
```

Bases: *AbstractFileSyncPolicy*

File is synced up (from disk to the cloud).

#### Parameters

- **source\_path** (`Optional[AbstractPath]`) –
- **source\_folder** (`AbstractFolder`) –
- **dest\_path** (`Optional[AbstractPath]`) –
- **dest\_folder** (`AbstractFolder`) –
- **now\_millis** (`int`) –
- **keep\_days** (`int`) –
- **newer\_file\_mode** (`NewerFileSyncMode`) –
- **compare\_threshold** (`int`) –
- **compare\_version\_mode** (`CompareVersionMode`) –
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`) –
- **upload\_mode** (`UploadMode`) –
- **absolute\_minimum\_part\_size** (`Optional[int]`) –

```
DESTINATION_PREFIX = 'b2://'
```

```
SOURCE_PREFIX = 'local://'
```

```
class b2sdk._internal.sync.policy.UpAndDeletePolicy(source_path, source_folder, dest_path,
 dest_folder, now_millis, keep_days,
 newer_file_mode, compare_threshold, com-
 pare_version_mode=CompareVersionMode.MODTIME,
 encrypt-
 tion_settings_provider=<b2sdk._internal.sync.encryption_provider
object>, upload_mode=UploadMode.FULL,
 absolute_minimum_part_size=None)
```

Bases: *UpPolicy*

File is synced up (from disk to the cloud) and the delete flag is SET.

#### Parameters

- **source\_path** (`Optional[AbstractPath]`) –
- **source\_folder** (`AbstractFolder`) –
- **dest\_path** (`Optional[AbstractPath]`) –
- **dest\_folder** (`AbstractFolder`) –
- **now\_millis** (`int`) –

- `keep_days (int)` –
- `newer_file_mode (NewerFileSyncMode)` –
- `compare_threshold (int)` –
- `compare_version_mode (CompareVersionMode)` –
- `encryption_settings_provider (AbstractSyncEncryptionSettingsProvider)` –
- `upload_mode (UploadMode)` –
- `absolute_minimum_part_size (Optional[int])` –

```
class b2sdk._internal.sync.policy.UpAndKeepDaysPolicy(source_path, source_folder, dest_path,
 dest_folder, now_millis, keep_days,
 newer_file_mode, compare_threshold, com-
 pare_version_mode=CompareVersionMode.MODTIME,
 encryp-
 tion_settings_provider=<b2sdk._internal.sync.encryption_provi
 object>, upload_mode=UploadMode.FULL,
 absolute_minimum_part_size=None)
```

Bases: `UpPolicy`

File is synced up (from disk to the cloud) and the keepDays flag is SET.

**Parameters**

- `source_path (Optional[AbstractPath])` –
- `source_folder (AbstractFolder)` –
- `dest_path (Optional[AbstractPath])` –
- `dest_folder (AbstractFolder)` –
- `now_millis (int)` –
- `keep_days (int)` –
- `newer_file_mode (NewerFileSyncMode)` –
- `compare_threshold (int)` –
- `compare_version_mode (CompareVersionMode)` –
- `encryption_settings_provider (AbstractSyncEncryptionSettingsProvider)` –
- `upload_mode (UploadMode)` –
- `absolute_minimum_part_size (Optional[int])` –

```
class b2sdk._internal.sync.policy.DownAndDeletePolicy(source_path, source_folder, dest_path,
 dest_folder, now_millis, keep_days,
 newer_file_mode, compare_threshold, com-
 pare_version_mode=CompareVersionMode.MODTIME,
 encryp-
 tion_settings_provider=<b2sdk._internal.sync.encryption_provi
 object>, upload_mode=UploadMode.FULL,
 absolute_minimum_part_size=None)
```

Bases: `DownPolicy`

File is synced down (from the cloud to disk) and the delete flag is SET.

**Parameters**

- **source\_path** (`Optional[AbstractPath]`) –
- **source\_folder** (`AbstractFolder`) –
- **dest\_path** (`Optional[AbstractPath]`) –
- **dest\_folder** (`AbstractFolder`) –
- **now\_millis** (`int`) –
- **keep\_days** (`int`) –
- **newer\_file\_mode** (`NewerFileSyncMode`) –
- **compare\_threshold** (`int`) –
- **compare\_version\_mode** (`CompareVersionMode`) –
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`) –
- **upload\_mode** (`UploadMode`) –
- **absolute\_minimum\_part\_size** (`Optional[int]`) –

```
class b2sdk._internal.sync.policy.DownAndKeepDaysPolicy(source_path, source_folder, dest_path,
 dest_folder, now_millis, keep_days,
 newer_file_mode, compare_threshold, com-
 pare_version_mode=CompareVersionMode.MODTIME,
 encryp-
 tion_settings_provider=<b2sdk._internal.sync.encryption_pro-
 object>,
 upload_mode=UploadMode.FULL,
 absolute_minimum_part_size=None)
```

Bases: `DownPolicy`

File is synced down (from the cloud to disk) and the `keepDays` flag is SET.

#### Parameters

- **source\_path** (`Optional[AbstractPath]`) –
- **source\_folder** (`AbstractFolder`) –
- **dest\_path** (`Optional[AbstractPath]`) –
- **dest\_folder** (`AbstractFolder`) –
- **now\_millis** (`int`) –
- **keep\_days** (`int`) –
- **newer\_file\_mode** (`NewerFileSyncMode`) –
- **compare\_threshold** (`int`) –
- **compare\_version\_mode** (`CompareVersionMode`) –
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`) –
- **upload\_mode** (`UploadMode`) –
- **absolute\_minimum\_part\_size** (`Optional[int]`) –

```
class b2sdk._internal.sync.policy.CopyPolicy(source_path, source_folder, dest_path, dest_folder,
 now_millis, keep_days, newer_file_mode,
 compare_threshold, compare_version_mode=CompareVersionMode.MODTIME,
 encryption_settings_provider=<b2sdk._internal.sync.encryption_provider.ServerD
 object>, upload_mode=UploadMode.FULL,
 absolute_minimum_part_size=None)

Bases: AbstractFileSyncPolicy

File is copied (server-side).

Parameters
• source_path (Optional[AbstractPath]) –
• source_folder (AbstractFolder) –
• dest_path (Optional[AbstractPath]) –
• dest_folder (AbstractFolder) –
• now_millis (int) –
• keep_days (int) –
• newer_file_mode (NewerFileSyncMode) –
• compare_threshold (int) –
• compare_version_mode (CompareVersionMode) –
• encryption_settings_provider (AbstractSyncEncryptionSettingsProvider) –
• upload_mode (UploadMode) –
• absolute_minimum_part_size (Optional[int]) –

DESTINATION_PREFIX = 'b2://'

SOURCE_PREFIX = 'b2://'

class b2sdk._internal.sync.policy.CopyAndDeletePolicy(source_path, source_folder, dest_path,
 dest_folder, now_millis, keep_days,
 newer_file_mode, compare_threshold, compare_version_mode=CompareVersionMode.MODTIME,
 encryption_settings_provider=<b2sdk._internal.sync.encryption_provider.ServerD
 object>, upload_mode=UploadMode.FULL,
 absolute_minimum_part_size=None)
```

Bases: `CopyPolicy`

File is copied (server-side) and the delete flag is SET.

#### Parameters

- **source\_path** (`Optional[AbstractPath]`) –
- **source\_folder** (`AbstractFolder`) –
- **dest\_path** (`Optional[AbstractPath]`) –
- **dest\_folder** (`AbstractFolder`) –
- **now\_millis** (`int`) –

- `keep_days (int)` –
- `newer_file_mode (NewerFileSyncMode)` –
- `compare_threshold (int)` –
- `compare_version_mode (CompareVersionMode)` –
- `encryption_settings_provider (AbstractSyncEncryptionSettingsProvider)` –
- `upload_mode (UploadMode)` –
- `absolute_minimum_part_size (Optional[int])` –

```
class b2sdk._internal.sync.policy.CopyAndKeepDaysPolicy(source_path, source_folder, dest_path,
 dest_folder, now_millis, keep_days,
 newer_file_mode, compare_threshold, com-
 pare_version_mode=CompareVersionMode.MODTIME,
 encryp-
 tion_settings_provider=<b2sdk._internal.sync.encryption_pro-
 object>,
 upload_mode=UploadMode.FULL,
 absolute_minimum_part_size=None)
```

Bases: `CopyPolicy`

File is copied (server-side) and the `keepDays` flag is SET.

#### Parameters

- `source_path (Optional[AbstractPath])` –
- `source_folder (AbstractFolder)` –
- `dest_path (Optional[AbstractPath])` –
- `dest_folder (AbstractFolder)` –
- `now_millis (int)` –
- `keep_days (int)` –
- `newer_file_mode (NewerFileSyncMode)` –
- `compare_threshold (int)` –
- `compare_version_mode (CompareVersionMode)` –
- `encryption_settings_provider (AbstractSyncEncryptionSettingsProvider)` –
- `upload_mode (UploadMode)` –
- `absolute_minimum_part_size (Optional[int])` –

```
b2sdk._internal.sync.policy.make_b2_delete_note(version, index, transferred)
```

Create a note message for delete action.

#### Parameters

- `version (b2sdk.v2FileVersion)` – an object which contains file version info
- `index (int)` – file version index
- `transferred (bool)` – if True, file has been transferred, False otherwise

---

`b2sdk._internal.sync.policy.make_b2_delete_actions(source_path, dest_path, dest_folder, transferred)`

Create the actions to delete files stored on B2, which are not present locally.

#### Parameters

- `source_path` (`Optional[AbstractPath]`) – source file object
- `dest_path` (`Optional[B2Path]`) – destination file object
- `dest_folder` (`AbstractFolder`) – destination folder
- `transferred` (`bool`) – if True, file has been transferred, False otherwise

`b2sdk._internal.sync.policy.make_b2_keep_days_actions(source_path, dest_path, dest_folder, transferred, keep_days, now_millis)`

Create the actions to hide or delete existing versions of a file stored in b2.

When `keepDays` is set, all files that were visible any time from `keepDays` ago until now must be kept. If versions were uploaded 5 days ago, 15 days ago, and 25 days ago, and the `keepDays` is 10, only the 25 day-old version can be deleted. The 15 day-old version was visible 10 days ago.

#### Parameters

- `source_path` (`Optional[AbstractPath]`) – source file object
- `dest_path` (`Optional[B2Path]`) – destination file object
- `dest_folder` (`AbstractFolder`) – destination folder object
- `transferred` (`bool`) – if True, file has been transferred, False otherwise
- `keep_days` (`int`) – how many days to keep a file
- `now_millis` (`int`) – current time in milliseconds

`b2sdk._internal.sync.policy_manager`

`class b2sdk._internal.sync.policy_manager.SyncPolicyManager`

Bases: `object`

Policy manager; implement a logic to get a correct policy class and create a policy object based on various parameters.

`__init__()`

`get_policy(sync_type, source_path, source_folder, dest_path, dest_folder, now_millis, delete, keep_days, newer_file_mode, compare_threshold, compare_version_mode, encryption_settings_provider, upload_mode, absolute_minimum_part_size)`

Return a policy object.

#### Parameters

- `sync_type` (`str`) – synchronization type
- `source_path` (`Optional[AbstractPath]`) – source file
- `source_folder` (`AbstractFolder`) – a source folder path
- `dest_path` (`Optional[AbstractPath]`) – destination file
- `dest_folder` (`AbstractFolder`) – a destination folder path
- `now_millis` (`int`) – current time in milliseconds

- **delete** (`bool`) – delete policy
- **keep\_days** (`int`) – keep for days policy
- **newer\_file\_mode** (`NewerFileSyncMode`) – setting which determines handling for destination files newer than on the source
- **compare\_threshold** (`int`) – difference between file modification time or file size
- **compare\_version\_mode** (`CompareVersionMode`) – setting which determines how to compare source and destination files
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`)  
– an object which decides which encryption to use (if any)
- **upload\_mode** (`UploadMode`) – determines how file uploads are handled
- **absolute\_minimum\_part\_size** (`int`) – minimum file part size for large files

**Return type**

`AbstractFileSyncPolicy`

**Returns**

a policy object

**get\_policy\_class**(`sync_type, delete, keep_days`)

Get policy class by a given sync type.

**Parameters**

- **sync\_type** (`str`) – synchronization type
- **delete** (`bool`) – if True, delete files and update from source
- **keep\_days** (`int`) – keep for `keep_days` before delete

**Returns**

a policy class

## b2sdk.\_internal.sync.sync

**b2sdk.\_internal.sync.sync.count\_files**(`local_folder, reporter, policies_manager`)

Count all of the files in a local folder.

**Parameters**

- **local\_folder** (`b2sdk._internal.scan.folder.AbstractFolder`) – a folder object.
- **reporter** – reporter object

**class b2sdk.\_internal.sync.sync.KeepOrDeleteMode**(`value, names=None, *values, module=None, qualname=None, type=None, start=1, boundary=None`)

Bases: `Enum`

Mode of dealing with old versions of files on the destination

**DELETE = 301**

delete the old version as soon as the new one has been uploaded

**KEEP\_BEFORE\_DELETE = 302**

keep the old versions of the file for a configurable number of days before deleting them, always keeping the newest version

**NO\_DELETE = 303**

keep old versions of the file, do not delete anything

```
class b2sdk._internal.sync.sync.Synchronizer(max_workers, policies_manager=<b2sdk._internal.scan.policies.ScanPoliciesManager object>, dry_run=False, allow_empty_source=False, newer_file_mode=NewerFileSyncMode.RAISE_ERROR, keep_days_or_delete=KeepOrDeleteMode.NO_DELETE, compare_version_mode=CompareVersionMode.MODTIME, compare_threshold=None, keep_days=None, sync_policy_manager=<b2sdk._internal.sync.policy_manager.SyncPolicyManager object>, upload_mode=UploadMode.FULL, absolute_minimum_part_size=None)
```

Bases: `object`

Copies multiple “files” from source to destination. Optionally deletes or hides destination files that the source does not have.

The synchronizer can copy files:

- From a B2 bucket to a local destination.
- From a local source to a B2 bucket.
- From one B2 bucket to another.
- Between different folders in the same B2 bucket. It will sync only the latest versions of files.

By default, the synchronizer:

- Fails when the specified source directory doesn’t exist or is empty. (see `allow_empty_source` argument)
- Fails when the source is newer. (see `newer_file_mode` argument)
- Doesn’t delete a file if it’s present on the destination but not on the source. (see `keep_days_or_delete` and `keep_days` arguments)
- Compares files based on modification time. (see `compare_version_mode` and `compare_threshold` arguments)

### Parameters

- `sync_policy_manager` (`SyncPolicyManager`) –
- `upload_mode` (`UploadMode`) –
- `absolute_minimum_part_size` (`Optional[int]`) –

```
__init__(max_workers, policies_manager=<b2sdk._internal.scan.policies.ScanPoliciesManager object>, dry_run=False, allow_empty_source=False, newer_file_mode=NewerFileSyncMode.RAISE_ERROR, keep_days_or_delete=KeepOrDeleteMode.NO_DELETE, compare_version_mode=CompareVersionMode.MODTIME, compare_threshold=None, keep_days=None, sync_policy_manager=<b2sdk._internal.sync.policy_manager.SyncPolicyManager object>, upload_mode=UploadMode.FULL, absolute_minimum_part_size=None)
```

Initialize synchronizer class and validate arguments

### Parameters

- `max_workers` (`int`) – max number of workers

- **policies\_manager** – object which decides which files to process
  - **dry\_run** (`bool`) – test mode, does not actually transfer/delete when enabled
  - **allow\_empty\_source** (`bool`) – if True, do not check whether source folder is empty
  - **newer\_file\_mode** (`b2sdk.v2.NewerFileSyncMode`) – setting which determines handling for destination files newer than on the source
  - **keep\_days\_or\_delete** (`b2sdk.v2.KeepOrDeleteMode`) – setting which determines if we should delete or not delete or keep for *keep\_days*
  - **compare\_version\_mode** (`b2sdk.v2.CompareVersionMode`) – how to compare the source and destination files to find new ones
  - **compare\_threshold** (`int`) – should be greater than 0, default is 0
  - **keep\_days** (`int`) – if `keep_days_or_delete` is `b2sdk.v2.KeepOrDeleteMode.KEEP_BEFORE_DELETE`, then this should be greater than 0
  - **sync\_policy\_manager** (`SyncPolicyManager`) – object which decides what to do with each file (upload, download, delete, copy, hide etc)
  - **upload\_mode** (`UploadMode`) – determines how file uploads are handled
  - **absolute\_minimum\_part\_size** (`Optional[int]`) – minimum file part size for large files
  - **sync\_policy\_manager** –
  - **upload\_mode** –
  - **absolute\_minimum\_part\_size** –
- sync\_folders**(*source\_folder*, *dest\_folder*, *now\_millis*, *reporter*, *encryption\_settings\_provider*=<*b2sdk.\_internal.sync.encryption\_provider.ServerDefaultSyncEncryptionSettingsProvider*>)

Syncs two folders. Always ensures that every file in the source is also in the destination. Deletes any file versions in the destination older than *history\_days*.

#### Parameters

- **source\_folder** (`AbstractFolder`) – source folder object
- **dest\_folder** (`AbstractFolder`) – destination folder object
- **now\_millis** (`int`) – current time in milliseconds
- **reporter** (`Optional[SyncReport]`) – progress reporter
- **encryption\_settings\_provider** (`AbstractSyncEncryptionSettingsProvider`) – encryption setting provider

#### `b2sdk._internal.transfer.inbound.downloader.abstract` – Downloader base class

```
class b2sdk._internal.transfer.inbound.downloader.abstract.EmptyHasher(*args, **kwargs)
Bases: object
__init__(*args, **kwargs)
update(data)
digest()
```

```

hexdigest()
copy()

class b2sdk._internal.transfer.inbound.downloader.abstract.AbstractDownloader(thread_pool=None,
force_chunk_size=None,
min_chunk_size=None,
max_chunk_size=None,
align_factor=None,
check_hash=True,
**kwargs)

```

Bases: `object`

Abstract class for downloaders.

#### Variables

- **REQUIRES\_SEEKING** – if True, the downloader requires the ability to seek in the file object.
- **SUPPORTS\_DECODE\_CONTENT** – if True, the downloader supports decoded HTTP streams. In practice, this means that the downloader can handle HTTP responses which already have the content decoded per Content-Encoding and, more likely than not, of a different length than requested.

#### Parameters

- **thread\_pool** (`Optional[ThreadPoolExecutor]`) –
- **force\_chunk\_size** (`Optional[int]`) –
- **min\_chunk\_size** (`Optional[int]`) –
- **max\_chunk\_size** (`Optional[int]`) –
- **align\_factor** (`Optional[int]`) –
- **check\_hash** (`bool`) –

**REQUIRES\_SEEKING = True**

**SUPPORTS\_DECODE\_CONTENT = True**

**DEFAULT\_THREAD\_POOL\_CLASS**

alias of `ThreadPoolExecutor`

**DEFAULT\_ALIGN\_FACTOR = 4096**

**\_\_init\_\_(***thread\_pool=None, force\_chunk\_size=None, min\_chunk\_size=None, max\_chunk\_size=None,*  
*align\_factor=None, check\_hash=True, \*\*kwargs***)**

#### Parameters

- **thread\_pool** (`Optional[ThreadPoolExecutor]`) –
- **force\_chunk\_size** (`Optional[int]`) –
- **min\_chunk\_size** (`Optional[int]`) –
- **max\_chunk\_size** (`Optional[int]`) –
- **align\_factor** (`Optional[int]`) –
- **check\_hash** (`bool`) –

**is\_suitable**(*download\_version*, *allow\_seeking*)

Analyze *download\_version* (possibly against options passed earlier to constructor to find out whether the given download request should be handled by this downloader).

**Parameters**

- **download\_version** (*DownloadVersion*) –
- **allow\_seeking** (*bool*) –

**abstract download**(*file*, *response*, *download\_version*, *session*, *encryption=None*)

Download target to a file-like object.

**Parameters**

- **file** (*IOBase*) – file-like object to write to
- **response** (*Response*) – `requests.Response` of `b2_download_url_by_*` endpoint with the target object
- **download\_version** (*DownloadVersion*) – `DownloadVersion` of an object being downloaded
- **session** (*B2Session*) – `B2Session` to be used for downloading
- **encryption** (*Optional[EncryptionSetting]*) – optional `Encryption` setting

**Return type**`tuple[int, str]`**Returns**

(*bytes\_read*, *actual\_sha1*) please note *bytes\_read* may be different from bytes written to a file object if *decode\_content=True*

**b2sdk.\_internal.transfer.inbound.downloader.parallel – ParallelTransferer****class b2sdk.\_internal.transfer.inbound.downloader.parallel.ParallelDownloader**(*min\_part\_size*, *max\_streams=None*, *\*\*kwargs*)

Bases: *AbstractDownloader*

Downloader using threads to download&write multiple parts of an object in parallel.

Each part is downloaded by its own thread, while all writes are done by additional dedicated thread. This can increase performance even for a small file, as fetching & writing can be done in parallel.

**Parameters**

- **min\_part\_size** (*int*) –
- **max\_streams** (*Optional[int]*) –

**FINISH\_HASHING\_BUFFER\_SIZE = 1048576****SUPPORTS\_decode\_content = False****\_\_init\_\_(***min\_part\_size*, *max\_streams=None*, *\*\*kwargs***)****Parameters**

- **max\_streams** (*Optional[int]*) – maximum number of simultaneous streams
- **min\_part\_size** (*int*) – minimum amount of data a single stream will retrieve, in bytes

**download(file, response, download\_version, session, encryption=None)**

Download a file from given url using parallel download sessions and stores it in the given download\_destination.

**Parameters**

- **file** (`I0Base`) –
- **response** (`Response`) –
- **download\_version** (`DownloadVersion`) –
- **session** (`B2Session`) –
- **encryption** (`Optional[EncryptionSetting]`) –

```
class b2sdk._internal.transfer.inbound.downloader.parallel.WriterThread(file,
 max_queue_depth)
```

Bases: `Thread`

A thread responsible for keeping a queue of data chunks to write to a file-like object and for actually writing them down. Since a single thread is responsible for synchronization of the writes, we avoid a lot of issues between userspace and kernelspace that would normally require flushing buffers between the switches of the writer. That would kill performance and not synchronizing would cause data corruption (probably we'd end up with a file with unexpected blocks of zeros preceding the range of the writer that comes second and writes further into the file).

The object of this class is also responsible for backpressure: if items are added to the queue faster than they can be written (see GCP VMs with standard PD storage with faster CPU and network than local storage, [https://github.com/Backblaze/B2\\_Command\\_Line\\_Tool/issues/595](https://github.com/Backblaze/B2_Command_Line_Tool/issues/595)), then `obj.queue.put(item)` will block, slowing down the producer.

The recommended minimum value of `max_queue_depth` is equal to the amount of producer threads, so that if all producers submit a part at the exact same time (right after network issue, for example, or just after starting the read), they can continue their work without blocking. The writer should be able to store at least one data chunk before a new one is retrieved, but it is not guaranteed.

Therefore, the recommended value of `max_queue_depth` is higher - a double of the amount of producers, so that spikes on either end (many producers submit at the same time / consumer has a latency spike) can be accommodated without sacrificing performance.

Please note that a size of the chunk and the queue depth impact the memory footprint. In a default setting as of writing this, that might be 10 downloads, 8 producers, 1MB buffers, 2 buffers each =  $8 \times 2 \times 10 = 160$  MB (+ python buffers, operating system etc).

**\_\_init\_\_(file, max\_queue\_depth)**

This constructor should always be called with keyword arguments. Arguments are:

*group* should be None; reserved for future extension when a ThreadGroup class is implemented.

*target* is the callable object to be invoked by the `run()` method. Defaults to None, meaning nothing is called.

*name* is the thread name. By default, a unique name is constructed of the form “Thread-N” where N is a small decimal number.

*args* is a list or tuple of arguments for the target invocation. Defaults to () .

*kwargvs* is a dictionary of keyword arguments for the target invocation. Defaults to {} .

If a subclass overrides the constructor, it must make sure to invoke the base class constructor (`Thread.__init__()`) before doing anything else to the thread.

**run()**

Method representing the thread's activity.

You may override this method in a subclass. The standard run() method invokes the callable object passed to the object's constructor as the target argument, if any, with sequential and keyword arguments taken from the args and kwargs arguments, respectively.

```
b2sdk._internal.transfer.inbound.downloader.parallel.download_first_part(response, hasher,
 session, writer,
 first_part,
 chunk_size,
 encryption=None)
```

**Parameters**

- **response** ([Response](#)) – response of the original GET call
- **hasher** – hasher object to feed to as the stream is written
- **session** ([B2Session](#)) – B2 API session
- **writer** ([WriterThread](#)) – thread responsible for writing downloaded data
- **first\_part** ([PartToDownload](#)) – definition of the part to be downloaded
- **chunk\_size** ([int](#)) – size (in bytes) of read data chunks
- **encryption** ([Optional\[EncryptionSetting\]](#)) – encryption mode, algorithm and key

**Return type**

[None](#)

```
b2sdk._internal.transfer.inbound.downloader.parallel.download_non_first_part(url, session,
 writer,
 part_to_download,
 chunk_size,
 encryption=None)
```

**Parameters**

- **url** ([str](#)) – download URL
- **session** ([B2Session](#)) – B2 API session
- **writer** ([WriterThread](#)) – thread responsible for writing downloaded data
- **part\_to\_download** ([PartToDownload](#)) – definition of the part to be downloaded
- **chunk\_size** ([int](#)) – size (in bytes) of read data chunks
- **encryption** ([Optional\[EncryptionSetting\]](#)) – encryption mode, algorithm and key

**Return type**

[None](#)

```
class b2sdk._internal.transfer.inbound.downloader.parallel.PartToDownload(cloud_range,
 local_range)
```

Bases: [object](#)

Hold the range of a file to download, and the range of the local file where it should be stored.

```
__init__(cloud_range, local_range)
```

```
b2sdk._internal.transfer.inbound.downloader.parallel.gen_parts(cloud_range, local_range,
 part_count)
```

Generate a sequence of PartToDownload to download a large file as a collection of parts.

## b2sdk.\_internal.transfer.inbound.downloader.simple – SimpleDownloader

```
class b2sdk._internal.transfer.inbound.downloader.simple.SimpleDownloader(thread_pool=None,
 force_chunk_size=None,
 min_chunk_size=None,
 max_chunk_size=None,
 align_factor=None,
 check_hash=True,
 **kwargs)
```

Bases: *AbstractDownloader*

### Parameters

- **thread\_pool** (`Optional[ThreadPoolExecutor]`) –
- **force\_chunk\_size** (`Optional[int]`) –
- **min\_chunk\_size** (`Optional[int]`) –
- **max\_chunk\_size** (`Optional[int]`) –
- **align\_factor** (`Optional[int]`) –
- **check\_hash** (`bool`) –

`REQUIRES_SEEKING = False`

`SUPPORTS_DECODE_CONTENT = True`

`download(file, response, download_version, session, encryption=None)`

Download target to a file-like object.

### Parameters

- **file** (`IOBase`) – file-like object to write to
- **response** (`Response`) – requests.Response of `b2_download_url_by_*` endpoint with the target object
- **download\_version** (`DownloadVersion`) – DownloadVersion of an object being downloaded
- **session** (`B2Session`) – B2Session to be used for downloading
- **encryption** (`Optional[EncryptionSetting]`) – optional Encryption setting

### Returns

(`bytes_read`, `actual_sha1`) please note `bytes_read` may be different from bytes written to a file object if `decode_content=True`

`__init__(thread_pool=None, force_chunk_size=None, min_chunk_size=None, max_chunk_size=None, align_factor=None, check_hash=True, **kwargs)`

### Parameters

- **thread\_pool** (`Optional[ThreadPoolExecutor]`) –
- **force\_chunk\_size** (`Optional[int]`) –

- **min\_chunk\_size** (`Optional[int]`) –
- **max\_chunk\_size** (`Optional[int]`) –
- **align\_factor** (`Optional[int]`) –
- **check\_hash** (`bool`) –

`b2sdk._internal.transfer.inbound.download_manager` – Manager of downloaders

```
class b2sdk._internal.transfer.inbound.download_manager.DownloadManager(write_buffer_size=None,
 check_hash=True,
 max_download_streams_per_file=None,
 **kwargs)
```

Bases: `TransferManager`, `ThreadPoolMixin`

Handle complex actions around downloads to free raw\_api from that responsibility.

#### Parameters

- **write\_buffer\_size** (`Optional[int]`) –
- **check\_hash** (`bool`) –
- **max\_download\_streams\_per\_file** (`Optional[int]`) –

`DEFAULT_MIN_PART_SIZE = 104857600`

`MIN_CHUNK_SIZE = 8192`

`MAX_CHUNK_SIZE = 1048576`

`PARALLEL_DOWNLOADER_CLASS`

alias of `ParallelDownloader`

`SIMPLE_DOWNLOADER_CLASS`

alias of `SimpleDownloader`

`__init__(write_buffer_size=None, check_hash=True, max_download_streams_per_file=None, **kwargs)`

Initialize the DownloadManager using the given services object.

#### Parameters

- **write\_buffer\_size** (`Optional[int]`) –
- **check\_hash** (`bool`) –
- **max\_download\_streams\_per\_file** (`Optional[int]`) –

`download_file_from_url(url, progress_listener=None, range_=None, encryption=None)`

#### Parameters

- **url** – url from which the file should be downloaded
- **progress\_listener** – where to notify about downloading progress
- **range** – 2-element tuple containing data of http Range header
- **encryption** (`Optional[EncryptionSetting]`) – encryption setting (None if unknown)
- **encryption** –

#### Return type

`DownloadedFile`

`b2sdk._internal.transfer.outbound.upload_source`

```
class b2sdk._internal.transfer.outbound.upload_source.UploadMode(value, names=None, *values,
 module=None,
 qualname=None, type=None,
 start=1, boundary=None)
```

Bases: `Enum`

Mode of file uploads

`FULL = 1`

always upload the whole file

`INCREMENTAL = 2`

use incremental uploads when possible

`class b2sdk._internal.transfer.outbound.upload_source.AbstractUploadSource`

Bases: `OutboundTransferSource`

The source of data for uploading to b2.

**abstract** `get_content_sha1()`

Returns a 40-character string containing the hex SHA1 checksum of the data in the file.

**Return type**

`Optional[NewType(Sha1HexDigest, str)]`

**abstract** `open()`

Returns a binary file-like object from which the data can be read.

**Return type**

`IOBase`

`is_upload()`

Returns True if outbound source is an upload source.

**Return type**

`bool`

`is_copy()`

Returns True if outbound source is a copy source.

**Return type**

`bool`

`is_sha1_known()`

Returns information whether SHA1 of the source is currently available. Note that negative result doesn't mean that SHA1 is not available. Calling `get_content_sha1` can still provide a valid digest.

**Return type**

`bool`

```
class b2sdk._internal.transfer.outbound.upload_source.UploadSourceBytes(data_bytes,
 content_sha1=None)
```

Bases: `AbstractUploadSource`

**Parameters**

- `data_bytes` (`bytes` | `bytearray`) –
- `content_sha1` (`Optional[NewType(Sha1HexDigest, str)]`) –

**`__init__(data_bytes, content_sha1=None)`**

Initialize upload source using given bytes.

**Parameters**

- **data\_bytes** (`bytes | bytearray`) – Data that is to be uploaded.
- **content\_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) – SHA1 hexdigest of the data, or None.

**`get_content_length()`**

Returns the number of bytes of data in the file.

**Return type**

`int`

**`get_content_sha1()`**

Returns a 40-character string containing the hex SHA1 checksum of the data in the file.

**Return type**

`Optional[NewType(Sha1HexDigest, str)]`

**`open()`**

Returns a binary file-like object from which the data can be read.

**`is_sha1_known()`**

Returns information whether SHA1 of the source is currently available. Note that negative result doesn't mean that SHA1 is not available. Calling `get_content_sha1` can still provide a valid digest.

**Return type**

`bool`

**`class b2sdk._internal.transfer.outbound.upload_source.UploadSourceLocalFileBase(local_path, content_sha1=None)`**

Bases: *AbstractUploadSource*

**Parameters**

- **local\_path** (`PathLike | str`) –
- **content\_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) –

**`__init__(local_path, content_sha1=None)`**

Initialize upload source using provided path.

**Parameters**

- **local\_path** (`PathLike | str`) – Any path-like object that points to a file to be uploaded.
- **content\_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) – SHA1 hexdigest of the data, or None.

**`check_path_and_get_size()`**

**Return type**

`None`

**`get_content_length()`**

Returns the number of bytes of data in the file.

**Return type**

`int`

**get\_content\_sha1()**

Returns a 40-character string containing the hex SHA1 checksum of the data in the file.

**Return type**

`Optional[NewType(Sha1HexDigest, str)]`

**open()**

Returns a binary file-like object from which the data can be read.

**is\_sha1\_known()**

Returns information whether SHA1 of the source is currently available. Note that negative result doesn't mean that SHA1 is not available. Calling `get_content_sha1` can still provide a valid digest.

**Return type**

`bool`

```
class b2sdk._internal.transfer.outbound.upload_source.UploadSourceLocalFileRange(local_path,
 content_sha1=None,
 offset=0,
 length=None)
```

Bases: `UploadSourceLocalFileBase`

**Parameters**

- **local\_path** (`PathLike | str`) –
- **content\_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) –
- **offset** (`int`) –
- **length** (`Optional[int]`) –

**\_\_init\_\_(local\_path, content\_sha1=None, offset=0, length=None)**

Initialize upload source using provided path.

**Parameters**

- **local\_path** (`PathLike | str`) – Any path-like object that points to a file to be uploaded.
- **content\_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) – SHA1 hexdigest of the data, or None.
- **offset** (`int`) – Position in the file where upload should start from.
- **length** (`Optional[int]`) – Amount of data to be uploaded. If None, length of the remainder of the file is taken.

**open()**

Returns a binary file-like object from which the data can be read.

```
class b2sdk._internal.transfer.outbound.upload_source.UploadSourceLocalFile(local_path,
 content_sha1=None)
```

Bases: `UploadSourceLocalFileBase`

**Parameters**

- **local\_path** (`PathLike | str`) –
- **content\_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) –

**get\_incremental\_sources**(*file\_version*, *min\_part\_size=None*)

Split the upload into a copy and upload source constructing an incremental upload

This will return a list of upload sources. If the upload cannot split, the method will return [self].

**Parameters**

- **file\_version** (`BaseFileVersion`) –
- **min\_part\_size** (`Optional[int]`) –

**Return type**

`list[OutboundTransferSource]`

**class** `b2sdk._internal.transfer.outbound.upload_source.UploadSourceStream`(*stream\_opener*,  
*stream\_length=None*,  
*stream\_sha1=None*)

Bases: `AbstractUploadSource`

**Parameters**

- **stream\_opener** (`Callable[[], IOBase]`) –
- **stream\_length** (`Optional[int]`) –
- **stream\_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) –

**\_\_init\_\_**(*stream\_opener*, *stream\_length=None*, *stream\_sha1=None*)

Initialize upload source using arbitrary function.

**Parameters**

- **stream\_opener** (`Callable[[], IOBase]`) – A function that opens a stream for uploading.
- **stream\_length** (`Optional[int]`) – Length of the stream. If None, data will be calculated from the stream the first time it's required.
- **stream\_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) – SHA1 of the stream. If None, data will be calculated from the stream the first time it's required.

**get\_content\_length()**

Returns the number of bytes of data in the file.

**Return type**

`int`

**get\_content\_sha1()**

Returns a 40-character string containing the hex SHA1 checksum of the data in the file.

**Return type**

`Optional[NewType(Sha1HexDigest, str)]`

**open()**

Returns a binary file-like object from which the data can be read.

**is\_sha1\_known()**

Returns information whether SHA1 of the source is currently available. Note that negative result doesn't mean that SHA1 is not available. Calling `get_content_sha1` can still provide a valid digest.

**Return type**

`bool`

```
class b2sdk._internal.transfer.outbound.upload_source.UploadSourceStreamRange(stream_opener,
 offset=0,
 stream_length=None,
 stream_sha1=None)
```

Bases: [UploadSourceStream](#)

#### Parameters

- **stream\_opener** (`Callable[[], IOBase]`) –
- **offset** (`int`) –
- **stream\_length** (`Optional[int]`) –
- **stream\_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) –

**\_\_init\_\_(stream\_opener, offset=0, stream\_length=None, stream\_sha1=None)**

Initialize upload source using arbitrary function.

#### Parameters

- **stream\_opener** (`Callable[[], IOBase]`) – A function that opens a stream for uploading.
- **offset** (`int`) – Offset from which stream should be uploaded.
- **stream\_length** (`Optional[int]`) – Length of the stream. If None, data will be calculated from the stream the first time it's required.
- **stream\_sha1** (`Optional[NewType(Sha1HexDigest, str)]`) – SHA1 of the stream. If None, data will be calculated from the stream the first time it's required.

**open()**

Returns a binary file-like object from which the data can be read.

## b2sdk.\_internal.raw\_simulator – B2 raw api simulator

**b2sdk.\_internal.raw\_simulator.get\_bytes\_range(data\_bytes, bytes\_range)**

Slice bytes array using bytes range

```
class b2sdk._internal.raw_simulator.KeySimulator(account_id, name, application_key_id, key,
 capabilities, expiration_timestamp_or_none,
 bucket_id_or_none, bucket_name_or_none,
 name_prefix_or_none)
```

Bases: `object`

Hold information about one application key, which can be either a master application key, or one created with `create_key()`.

**\_\_init\_\_(account\_id, name, application\_key\_id, key, capabilities, expiration\_timestamp\_or\_none, bucket\_id\_or\_none, bucket\_name\_or\_none, name\_prefix\_or\_none)**

**as\_key()**

**as\_created\_key()**

Return the dict returned by `b2_create_key`.

This is just like the one for `b2_list_keys`, but also includes the secret key.

**get\_allowed()**

Return the ‘allowed’ structure to include in the response from `b2_authorize_account`.

```
class b2sdk._internal.raw_simulator.PartSimulator(file_id, part_number, content_length, content_sha1,
 part_data)
```

Bases: `object`

```
__init__(file_id, part_number, content_length, content_sha1, part_data)
```

```
as_list_parts_dict()
```

```
class b2sdk._internal.raw_simulator.FileSimulator(account_id, bucket, file_id, action, name,
 content_type, content_sha1, file_info, data_bytes,
 upload_timestamp, range_=None,
 server_side_encryption=None,
 file_retention=None,
 legal_hold=LegalHold.UNSET,
 replication_status=None)
```

Bases: `object`

One of three: an unfinished large file, a finished file, or a deletion marker.

#### Parameters

- `server_side_encryption` (`Optional[EncryptionSetting]`) –
- `file_retention` (`Optional[FileRetentionSetting]`) –
- `legal_hold` (`LegalHold`) –
- `replication_status` (`Optional[ReplicationStatus]`) –

```
CHECK_ENCRYPTION = True
```

```
SPECIAL_FILE_INFOS = {'b2-cache-control': 'Cache-Control',
 'b2-content-disposition': 'Content-Disposition', 'b2-content-encoding':
 'Content-Encoding', 'b2-content-language': 'Content-Language', 'b2-expires':
 'Expires'}
```

```
__init__(account_id, bucket, file_id, action, name, content_type, content_sha1, file_info, data_bytes,
 upload_timestamp, range_=None, server_side_encryption=None, file_retention=None,
 legal_hold=LegalHold.UNSET, replication_status=None)
```

#### Parameters

- `server_side_encryption` (`Optional[EncryptionSetting]`) –
- `file_retention` (`Optional[FileRetentionSetting]`) –
- `legal_hold` (`LegalHold`) –
- `replication_status` (`Optional[ReplicationStatus]`) –

```
classmethod dont_check_encryption()
```

```
sort_key()
```

Return a key that can be used to sort the files in a bucket in the order that `b2_list_file_versions` returns them.

```
as_download_headers(account_auth_token_or_none, range_=None)
```

```
as_upload_result(account_auth_token)
```

```
as_list_files_dict(account_auth_token)
```

```

is_allowed_to_read_file_retention(account_auth_token)
is_allowed_to_read_file_legal_hold(account_auth_token)
as_start_large_file_result(account_auth_token)
add_part(part_number, part)
finish(part_sha1_array)

is_visible()
 Does this file show up in b2_list_file_names?

list_parts(start_part_number, max_part_count)
check_encryption(request_encryption)

 Parameters
 request_encryption (Optional[EncryptionSetting]) –

```

**class** b2sdk.\_internal.raw\_simulator.FakeRequest(*url*, *headers*)

Bases: *object*

```

 Parameters
 • url (str) –
 • headers (CaseInsensitiveDict) –

 url: str
 headers: CaseInsensitiveDict

__init__(url, headers)

```

```

 Parameters
 • url (str) –
 • headers (CaseInsensitiveDict) –

```

**class** b2sdk.\_internal.raw\_simulator.FakeRaw(*data\_bytes*, *\_position=0*)

Bases: *object*

```

 Parameters
 • data_bytes (bytes) –
 • _position (int) –

 data_bytes: bytes
 tell()
 read(size)

```

```

__init__(data_bytes, _position=0)

```

```

 Parameters
 • data_bytes (bytes) –
 • _position (int) –

```

```
class b2sdk._internal.raw_simulator.FakeResponse(account_auth_token_or_none, file_sim, url,
 range_=None)

Bases: object

__init__(account_auth_token_or_none, file_sim, url, range_=None)

property data_bytes

iter_content(chunk_size=1)

property request

close()

class b2sdk._internal.raw_simulator.BucketSimulator(api, account_id, bucket_id, bucket_name,
 bucket_type, bucket_info=None,
 cors_rules=None, lifecycle_rules=None,
 options_set=None,
 default_server_side_encryption=None,
 is_file_lock_enabled=None, replication=None)

Bases: object

Parameters
 • lifecycle_rules (Optional[list[LifecycleRule]]) –
 • is_file_lock_enabled (Optional[bool]) –
 • replication (Optional[ReplicationConfiguration]) –

FIRST_FILE_NUMBER = 9999

FIRST_FILE_ID = '9999'

FILE_SIMULATOR_CLASS
 alias of FileSimulator

RESPONSE_CLASS
 alias of FakeResponse

MAX_SIMPLE_COPY_SIZE = 200

__init__(api, account_id, bucket_id, bucket_name, bucket_type, bucket_info=None, cors_rules=None,
 lifecycle_rules=None, options_set=None, default_server_side_encryption=None,
 is_file_lock_enabled=None, replication=None)

Parameters
 • lifecycle_rules (Optional[list[LifecycleRule]]) –
 • is_file_lock_enabled (Optional[bool]) –
 • replication (Optional[ReplicationConfiguration]) –

get_file(file_id, file_name)

Return type
 FileSimulator

is_allowed_to_read_bucket_encryption_setting(account_auth_token)
```

```

is_allowed_to_read_bucket_retention(account_auth_token)

bucket_dict(account_auth_token)

cancel_large_file(file_id)

delete_file_version(account_auth_token, file_id, file_name, bypass_governance=False)

 Parameters
 bypass_governance (bool) –
download_file_by_id(account_auth_token_or_none, file_id, url, range_=None, encryption=None)

 Parameters
 encryption (Optional[EncryptionSetting]) –
download_file_by_name(account_auth_token_or_none, file_name, url, range_=None, encryption=None)

 Parameters
 encryption (Optional[EncryptionSetting]) –
finish_large_file(account_auth_token, file_id, part_shal_array)

get_file_info_by_id(account_auth_token, file_id)

get_file_info_by_name(account_auth_token, file_name)

get_upload_url(account_auth_token)

get_upload_part_url(account_auth_token, file_id)

hide_file(account_auth_token, file_name)

update_file_retention(account_auth_token, file_id, file_name, file_retention, bypass_governance=False)

 Parameters
 • file_retention (FileRetentionSetting) –
 • bypass_governance (bool) –
update_file_legal_hold(account_auth_token, file_id, file_name, legal_hold)

 Parameters
 legal_hold (LegalHold) –
copy_file(account_auth_token, file_id, new_file_name, bytes_range=None, metadata_directive=None,
 content_type=None, file_info=None, destination_bucket_id=None,
 destination_server_side_encryption=None, source_server_side_encryption=None,
 file_retention=None, legal_hold=None)

 Parameters
 • destination_server_side_encryption (Optional[EncryptionSetting]) –
 • source_server_side_encryption (Optional[EncryptionSetting]) –
 • file_retention (Optional[FileRetentionSetting]) –
 • legal_hold (Optional[LegalHold]) –
list_file_names(account_auth_token, start_file_name=None, max_file_count=None, prefix=None)

```

```
list_file_versions(account_auth_token, start_file_name=None, start_file_id=None,
 max_file_count=None, prefix=None)

list_parts(file_id, start_part_number, max_part_count)

list_unfinished_large_files(account_auth_token, start_file_id=None, max_file_count=None,
 prefix=None)

start_large_file(account_auth_token, file_name, content_type, file_info, server_side_encryption=None,
 file_retention=None, legal_hold=None, custom_upload_timestamp=None)
```

**Parameters**

- **server\_side\_encryption** (`Optional[EncryptionSetting]`) –
- **file\_retention** (`Optional[FileRetentionSetting]`) –
- **legal\_hold** (`Optional[LegalHold]`) –
- **custom\_upload\_timestamp** (`Optional[int]`) –

```
upload_file(upload_id, upload_auth_token, file_name, content_length, content_type, content_sha1,
 file_info, data_stream, server_side_encryption=None, file_retention=None, legal_hold=None,
 custom_upload_timestamp=None)
```

**Parameters**

- **upload\_id** (`str`) –
- **upload\_auth\_token** (`str`) –
- **file\_name** (`str`) –
- **content\_length** (`int`) –
- **content\_type** (`str`) –
- **content\_sha1** (`str`) –
- **file\_info** (`dict`) –
- **server\_side\_encryption** (`Optional[EncryptionSetting]`) –
- **file\_retention** (`Optional[FileRetentionSetting]`) –
- **legal\_hold** (`Optional[LegalHold]`) –
- **custom\_upload\_timestamp** (`Optional[int]`) –

```
upload_part(file_id, part_number, content_length, sha1_sum, input_stream, server_side_encryption=None)
```

**Parameters**

**server\_side\_encryption** (`Optional[EncryptionSetting]`) –

```
get_notification_rules()
```

**Return type**

`list[NotificationRule]`

```
set_notification_rules(rules)
```

**Parameters**

**rules** (`Iterable[NotificationRule]`) –

**Return type**

`list[NotificationRuleResponse]`

---

**simulate\_notification\_rule\_suspension**(rule\_name, reason, is\_suspended=None)

**Parameters**

- **rule\_name** (`str`) –
- **reason** (`str`) –
- **is\_suspended** (`Optional[bool]`) –

**Return type**

`None`

**class b2sdk.\_internal.raw\_simulator.RawSimulator(b2\_http=None)**

Bases: *AbstractRawApi*

Implement the same interface as B2RawHTTPApi by simulating all of the calls and keeping state in memory.

The intended use for this class is for unit tests that test things built on top of B2RawHTTPApi.

**BUCKET\_SIMULATOR\_CLASS**

alias of *BucketSimulator*

**API\_URL** = 'http://api.example.com'

**S3\_API\_URL** = 'http://s3.api.example.com'

**DOWNLOAD\_URL** = 'http://download.example.com'

**MIN\_PART\_SIZE** = 200

**MAX\_PART\_ID** = 10000

**MAX\_DURATION\_IN\_SECONDS** = 86400000

**UPLOAD\_PART\_MATCHER** = `re.compile('https://upload.example.com/part/([^\/*]*)')`

**UPLOAD\_URL\_MATCHER** = `re.compile('https://upload.example.com/([^\/*])/([^\/*]*)')`

**DOWNLOAD\_URL\_MATCHER** =

`re.compile('http://download.example.com(?:/b2api/v[0-9]+/b2_download_file_by_id\\?fileId=(?P<file_id>[^/]+)|/file/(?P<bucket_name>[^/]+)/(?P<file_name>.+))$')`

**\_\_init\_\_(b2\_http=None)**

**expire\_auth\_token(auth\_token)**

Simulate the auth token expiring.

The next call that tries to use this auth token will get an auth\_token\_expired error.

**create\_account()**

Simulate creating an account.

Return (accountId, masterApplicationKey) for a newly created account.

**set\_upload\_errors(errors)**

Store a sequence of exceptions to raise on upload. Each one will be raised in turn, until they are all gone. Then the next upload will succeed.

**authorize\_account(realm\_url, application\_key\_id, application\_key)**

**cancel\_large\_file(api\_url, account\_auth\_token, file\_id)**

```
create_bucket(api_url, account_auth_token, account_id, bucket_name, bucket_type, bucket_info=None,
 cors_rules=None, lifecycle_rules=None, default_server_side_encryption=None,
 is_file_lock_enabled=None, replication=None)
```

**Parameters**

- **lifecycle\_rules** (`Optional[list[LifecycleRule]]`) –
- **default\_server\_side\_encryption** (`Optional[EncryptionSetting]`) –
- **is\_file\_lock\_enabled** (`Optional[bool]`) –
- **replication** (`Optional[ReplicationConfiguration]`) –

```
create_key(api_url, account_auth_token, account_id, capabilities, key_name, valid_duration_seconds,
 bucket_id, name_prefix)
```

```
delete_file_version(api_url, account_auth_token, file_id, file_name, bypass_governance=False)
```

**Parameters**

**bypass\_governance** (`bool`) –

```
update_file_retention(api_url, account_auth_token, file_id, file_name, file_retention,
 bypass_governance=False)
```

**Parameters**

- **file\_retention** (`FileRetentionSetting`) –
- **bypass\_governance** (`bool`) –

```
update_file_legal_hold(api_url, account_auth_token, file_id, file_name, legal_hold)
```

**Parameters**

**legal\_hold** (`bool`) –

```
delete_bucket(api_url, account_auth_token, account_id, bucket_id)
```

```
download_file_from_url(account_auth_token_or_none, url, range_=None, encryption=None)
```

**Parameters**

**encryption** (`Optional[EncryptionSetting]`) –

```
delete_key(api_url, account_auth_token, application_key_id)
```

```
finish_large_file(api_url, account_auth_token, file_id, part_sha1_array)
```

```
get_download_authorization(api_url, account_auth_token, bucket_id, file_name_prefix,
 valid_duration_in_seconds)
```

```
get_file_info_by_id(api_url, account_auth_token, file_id)
```

```
get_file_info_by_name(api_url, account_auth_token, bucket_name, file_name)
```

```
get_upload_url(api_url, account_auth_token, bucket_id)
```

```
get_upload_part_url(api_url, account_auth_token, file_id)
```

```
hide_file(api_url, account_auth_token, bucket_id, file_name)
```

---

```
copy_file(api_url, account_auth_token, source_file_id, new_file_name, bytes_range=None,
 metadata_directive=None, content_type=None, file_info=None, destination_bucket_id=None,
 destination_server_side_encryption=None, source_server_side_encryption=None,
 file_retention=None, legal_hold=None)
```

**Parameters**

- **file\_retention** (`Optional[FileRetentionSetting]`) –
- **legal\_hold** (`Optional[LegalHold]`) –

```
copy_part(api_url, account_auth_token, source_file_id, large_file_id, part_number, bytes_range=None,
 destination_server_side_encryption=None, source_server_side_encryption=None)
```

**Parameters**

- **destination\_server\_side\_encryption** (`Optional[EncryptionSetting]`) –
- **source\_server\_side\_encryption** (`Optional[EncryptionSetting]`) –

```
list_buckets(api_url, account_auth_token, account_id, bucket_id=None, bucket_name=None)
```

```
list_file_names(api_url, account_auth_token, bucket_id, start_file_name=None, max_file_count=None,
 prefix=None)
```

```
list_file_versions(api_url, account_auth_token, bucket_id, start_file_name=None, start_file_id=None,
 max_file_count=None, prefix=None)
```

```
list_keys(api_url, account_auth_token, account_id, max_key_count=1000,
 start_application_key_id=None)
```

```
list_parts(api_url, account_auth_token, file_id, start_part_number, max_part_count)
```

```
list_unfinished_large_files(api_url, account_auth_token, bucket_id, start_file_id=None,
 max_file_count=None, prefix=None)
```

```
start_large_file(api_url, account_auth_token, bucket_id, file_name, content_type, file_info,
 server_side_encryption=None, file_retention=None, legal_hold=None,
 custom_upload_timestamp=None)
```

**Parameters**

- **server\_side\_encryption** (`Optional[EncryptionSetting]`) –
- **file\_retention** (`Optional[FileRetentionSetting]`) –
- **legal\_hold** (`Optional[LegalHold]`) –
- **custom\_upload\_timestamp** (`Optional[int]`) –

```
update_bucket(api_url, account_auth_token, account_id, bucket_id, bucket_type=None, bucket_info=None,
 cors_rules=None, lifecycle_rules=None, if_revision_is=None,
 default_server_side_encryption=None, default_retention=None, replication=None,
 is_file_lock_enabled=None)
```

**Parameters**

- **lifecycle\_rules** (`Optional[list[LifecycleRule]]`) –
- **default\_server\_side\_encryption** (`Optional[EncryptionSetting]`) –
- **default\_retention** (`Optional[BucketRetentionSetting]`) –

```
 • replication (Optional[ReplicationConfiguration]) –
 • is_file_lock_enabled (Optional[bool]) –
classmethod get_upload_file_headers(upload_auth_token, file_name, content_length, content_type,
 content_sha1, file_info, server_side_encryption, file_retention,
 legal_hold, custom_upload_timestamp=None)
```

**Parameters**

- **upload\_auth\_token** (`str`) –
- **file\_name** (`str`) –
- **content\_length** (`int`) –
- **content\_type** (`str`) –
- **content\_sha1** (`str`) –
- **file\_info** (`dict`) –
- **server\_side\_encryption** (`Optional[EncryptionSetting]`) –
- **file\_retention** (`Optional[FileRetentionSetting]`) –
- **legal\_hold** (`Optional[LegalHold]`) –
- **custom\_upload\_timestamp** (`Optional[int]`) –

**Return type**

`dict`

```
upload_file(upload_url, upload_auth_token, file_name, content_length, content_type, content_sha1,
 file_info, data_stream, server_side_encryption=None, file_retention=None, legal_hold=None,
 custom_upload_timestamp=None)
```

**Parameters**

- **upload\_url** (`str`) –
- **upload\_auth\_token** (`str`) –
- **file\_name** (`str`) –
- **content\_length** (`int`) –
- **content\_type** (`str`) –
- **content\_sha1** (`str`) –
- **file\_info** (`dict`) –
- **server\_side\_encryption** (`Optional[EncryptionSetting]`) –
- **file\_retention** (`Optional[FileRetentionSetting]`) –
- **legal\_hold** (`Optional[LegalHold]`) –
- **custom\_upload\_timestamp** (`Optional[int]`) –

```
upload_part(upload_url, upload_auth_token, part_number, content_length, sha1_sum, input_stream,
 server_side_encryption=None)
```

**Parameters**

`server_side_encryption` (`Optional[EncryptionSetting]`) –

```
set_bucket_notification_rules(api_url, account_auth_token, bucket_id, rules)
```

#### Parameters

- `api_url` (`str`) –
- `account_auth_token` (`str`) –
- `bucket_id` (`str`) –
- `rules` (`Iterable[NotificationRule]`) –

```
get_bucket_notification_rules(api_url, account_auth_token, bucket_id)
```

#### Parameters

- `api_url` (`str`) –
- `account_auth_token` (`str`) –
- `bucket_id` (`str`) –

#### Return type

```
list[NotificationRule]
```

## 2.9 Contributors Guide

We encourage outside contributors to perform changes on our codebase. Many such changes have been merged already. In order to make it easier to contribute, core developers of this project:

- provide guidance (through the issue reporting system)
- provide tool assisted code review (through the Pull Request system)
- maintain a set of unit tests
- maintain a set of integration tests (run with a production cloud)
- maintain development automation tools using `nox` that can easily:
  - format the code using `yapf`
  - runs linters to find subtle/potential issues with maintainability
  - run the test suite on multiple Python versions using `pytest`
- maintain Continuous Integration (by using GitHub Actions) that:
  - runs all sorts of linters
  - checks if the Python distribution can be built
  - runs all tests on a matrix of 6 versions of Python (including pypy) and 3 operating systems (Linux, Mac OS X and Windows)
  - checks if the documentation can be built properly
- maintain other Continuous Integration tools (coverage tracker)

You'll need to have `nox` installed:

- `pip install nox`

With `nox`, you can run different sessions (default are `lint` and `test`):

- `format` -> Format the code.

- `lint` -> Run linters.
- `test (test-3.7, test-3.8, test-3.9, test-3.10)` -> Run test suite.
- `cover` -> Perform coverage analysis.
- `build` -> Build the distribution.
- `deploy` -> Deploy the distribution to the PyPi.
- `doc` -> Build the documentation.
- `doc_cover` -> Perform coverage analysis for the documentation.

For example:

```
$ nox -s format
nox > Running session format
nox > Creating virtual environment (virtualenv) using python3.10 in .nox/format
...
$ nox -s format
nox > Running session format
nox > Re-using existing virtual environment at .nox/format.
...
$ nox --no-venv -s format
nox > Running session format
...
```

Sessions `test`, `unit`, and `integration` can run on many Python versions, 3.7-3.10 by default.

Sessions other than `test` use the last given Python version, 3.10 by default.

You can change it:

```
export NOX_PYTHONS=3.7,3.8
```

With the above setting, session `test` will run on Python 3.7 and 3.8, and all other sessions on Python 3.8.

Given Python interpreters should be installed in the operating system or via [pyenv](#).

## 2.9.1 Linting

To run all available linters:

```
$ nox -s lint
```

## 2.9.2 Testing

To run all tests on every available Python version:

```
$ nox -s test
```

To run all tests on a specific version:

```
$ nox -s test-3.10
```

To run just unit tests:

```
$ nox -s unit-3.10
```

To run just integration tests:

```
$ export B2_TEST_APPLICATION_KEY=your_app_key
$ export B2_TEST_APPLICATION_KEY_ID=your_app_key_id
$ nox -s integration-3.10
```

## 2.9.3 Documentation

To build the documentation and watch for changes (including the source code):

```
$ nox -s doc
```

To just build the documentation:

```
$ nox --non-interactive -s doc
```



---

CHAPTER  
**THREE**

---

## **INDICES AND TABLES**

- genindex
- modindex
- search



## PYTHON MODULE INDEX

### b

b2sdk.\_internal.b2http, 120  
b2sdk.\_internal.cache, 130  
b2sdk.\_internal.encryption.types, 106  
b2sdk.\_internal.raw\_api, 110  
b2sdk.\_internal.raw\_simulator, 175  
b2sdk.\_internal.requests, 125  
b2sdk.\_internal.scan.folder, 137  
b2sdk.\_internal.scan.folder\_parser, 137  
b2sdk.\_internal.scan.path, 140  
b2sdk.\_internal.scan.policies, 141  
b2sdk.\_internal.scan.scan, 144  
b2sdk.\_internal.session, 106  
b2sdk.\_internal.stream.chained, 132  
b2sdk.\_internal.stream.hashing, 133  
b2sdk.\_internal.stream.progress, 134  
b2sdk.\_internal.stream.range, 135  
b2sdk.\_internal.stream.wrapper, 136  
b2sdk.\_internal.sync.action, 146  
b2sdk.\_internal.sync.exception, 152  
b2sdk.\_internal.sync.policy, 153  
b2sdk.\_internal.sync.policy\_manager, 161  
b2sdk.\_internal.sync.sync, 162  
b2sdk.\_internal.transfer.inbound.download\_manager,  
    170  
b2sdk.\_internal.transfer.inbound.downloader.abstract,  
    164  
b2sdk.\_internal.transfer.inbound.downloader.parallel,  
    166  
b2sdk.\_internal.transfer.inbound.downloader.simple,  
    169  
b2sdk.\_internal.transfer.outbound.upload\_source,  
    171  
b2sdk.\_internal.utils, 125  
b2sdk.v2.exception, 60



# INDEX

## Symbols

|                                                                                       |                                                                                                |
|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| <code>__dict__(b2sdk.v2.FileIdAndName attribute)</code> , 85                          | <code>__init__(b2sdk._internal.scan.scan.AbstractScanReport method)</code> , 145               |
| <code>__enter__(b2sdk.v2.TempDir method)</code> , 102                                 | <code>__init__(b2sdk._internal.scan.scan.AbstractScanResult method)</code> , 144               |
| <code>__exit__(b2sdk.v2.TempDir method)</code> , 102                                  | <code>__init__(b2sdk._internal.scan.scan.CountAndSampleScanReport method)</code> , 145         |
| <code>__init__(b2sdk._internal.cache.AuthInfoCache method)</code> , 131               | <code>__init__(b2sdk._internal.session.B2Session method)</code> , 107                          |
| <code>__init__(b2sdk._internal.cache.InMemoryCache method)</code> , 131               | <code>__init__(b2sdk._internal.stream.chained.ChainedStream method)</code> , 132               |
| <code>__init__(b2sdk._internal.raw_api.B2RawHTTPApi method)</code> , 116              | <code>__init__(b2sdk._internal.stream.hashing.StreamWithHash method)</code> , 133              |
| <code>__init__(b2sdk._internal.raw_simulator.BucketSimulator method)</code> , 178     | <code>__init__(b2sdk._internal.stream.progress.AbstractStreamWithProgress method)</code> , 134 |
| <code>__init__(b2sdk._internal.raw_simulator.FakeRaw method)</code> , 177             | <code>__init__(b2sdk._internal.stream.progress.ReadingStreamWithProgress method)</code> , 134  |
| <code>__init__(b2sdk._internal.raw_simulator.FakeRequest method)</code> , 177         | <code>__init__(b2sdk._internal.stream.range.RangeOfInputStream method)</code> , 135            |
| <code>__init__(b2sdk._internal.raw_simulator.FakeResponse method)</code> , 178        | <code>__init__(b2sdk._internal.stream.wrapper.StreamWithLengthWrapper method)</code> , 137     |
| <code>__init__(b2sdk._internal.raw_simulator.FileSimulator method)</code> , 176       | <code>__init__(b2sdk._internal.stream.wrapper.StreamWrapper method)</code> , 136               |
| <code>__init__(b2sdk._internal.raw_simulator.KeySimulator method)</code> , 175        | <code>__init__(b2sdk._internal.sync.action.B2CopyAction method)</code> , 150                   |
| <code>__init__(b2sdk._internal.raw_simulator.PartSimulator method)</code> , 176       | <code>__init__(b2sdk._internal.sync.action.B2DeleteAction method)</code> , 151                 |
| <code>__init__(b2sdk._internal.raw_simulator.RawSimulator method)</code> , 181        | <code>__init__(b2sdk._internal.sync.action.B2DownloadAction method)</code> , 149               |
| <code>__init__(b2sdk._internal.scan.folder.B2Folder method)</code> , 139              | <code>__init__(b2sdk._internal.sync.action.B2HideAction method)</code> , 148                   |
| <code>__init__(b2sdk._internal.scan.folder.LocalFolder method)</code> , 138           | <code>__init__(b2sdk._internal.sync.action.B2IncrementalUploadAction method)</code> , 148      |
| <code>__init__(b2sdk._internal.scan.path.AbstractPath method)</code> , 140            | <code>__init__(b2sdk._internal.sync.action.B2UploadAction method)</code> , 147                 |
| <code>__init__(b2sdk._internal.scan.path.B2Path method)</code> , 141                  | <code>__init__(b2sdk._internal.sync.action.LocalDeleteAction method)</code> , 152              |
| <code>__init__(b2sdk._internal.scan.path.LocalPath method)</code> , 140               | <code>__init__(b2sdk._internal.sync.policy.AbstractFileSyncPolicy method)</code> , 154         |
| <code>__init__(b2sdk._internal.scan.policies.IntegerRange method)</code> , 142        | <code>__init__(b2sdk._internal.sync.policy_manager.SyncPolicyManager method)</code> , 161      |
| <code>__init__(b2sdk._internal.scan.policies.RegexSet method)</code> , 141            | <code>__init__(b2sdk._internal.sync.sync.Synchronizer method)</code> , 163                     |
| <code>__init__(b2sdk._internal.scan.policies.ScanPoliciesManager method)</code> , 143 |                                                                                                |

`__init__(b2sdk._internal.transfer.inbound.download_manager_with_abstract_account_info attribute), 40`  
`method), 170`  
`_set_auth_data() (b2sdk.v2.AbstractAccountInfo`  
`__init__(b2sdk._internal.transfer.inbound.downloader.abstract.AbstractDownloader`  
`method), 165`  
`__init__(b2sdk._internal.transfer.inbound.downloader.AbstractEmptyHasher`  
`method), 164`  
`absolute_path (b2sdk._internal.scan.path.LocalPath`  
`__init__(b2sdk._internal.transfer.inbound.downloader.parallel.ParallelDownloader`  
`method), 166`  
`absoluteMinimumPartSize, 27`  
`AbstractPartDownloader (class in b2sdk.v2), 40`  
`method), 168`  
`AbstractAction (class in b2sdk._internal.sync.action),`  
`__init__(b2sdk._internal.transfer.inbound.downloader.parallel.WriterThread`  
`method), 167`  
`AbstractCache (class in b2sdk._internal.cache), 130`  
`AbstractSingleDownloader (class in b2sdk.v2), 51`  
`method), 169`  
`AbstractDownloader (class in`  
`__init__(b2sdk._internal.transfer.outbound.upload_source.UploadSourceBytes`  
`method), 171`  
`165`  
`AbstractUploadSourceLocalFileBase (class in`  
`b2sdk._internal.sync.policy), 153`  
`method), 172`  
`AbstractUploadSourceLocalFileBase (class in b2sdk._internal.scan.folder),`  
`method), 173`  
`137`  
`AbstractUploadSourceStream (class in b2sdk._internal.scan.path), 140`  
`method), 174`  
`AbstractProgressListener (class in b2sdk.v2), 89`  
`AbstractRawApi (class in b2sdk._internal.raw_api),`  
`method), 175`  
`112`  
`AbstractScanReport (class in`  
`b2sdk._internal.scan.scan), 144`  
`method), 130`  
`AbstractScanResult (class in`  
`b2sdk._internal.scan.scan), 144`  
`method), 127`  
`AbstractStreamWriter (class in`  
`b2sdk._internal.stream.progress), 134`  
`method), 30`  
`AbstractSyncEncryptionSettingsProvider (class`  
`in b2sdk.v2), 99`  
`method), 51`  
`AbstractUploadSource (class in`  
`b2sdk._internal.transfer.outbound.upload_source),`  
`method), 53`  
`171`  
`account ID, 27`  
`account_id (b2sdk.v2FileVersion attribute), 81`  
`account_info (b2sdk.v2.B2Api property), 54`  
`action (b2sdk.v2FileVersion attribute), 81`  
`add() (b2sdk._internal.scan.scan.AbstractScanReport`  
`method), 145`  
`add() (b2sdk._internal.scan.scan.CountAndSampleScanReport`  
`method), 145`  
`add_callback() (b2sdk._internal.b2http.B2Http`  
`method), 121`  
`add_part() (b2sdk._internal.raw_simulator.FileSimulator`  
`method), 177`  
`ADVANCED_HEADERS_LIMIT (b2sdk.v2FileVersion`  
`attribute), 81`  
`AES256 (b2sdk._internal.encryption.types.EncryptionAlgorithm`  
`attribute), 106`  
`all_capabilities() (b2sdk.v2.AbstractAccountInfo`  
`class method), 40`  
`method), 59`  
`method), 100`  
`method), 62`  
`method), 79`  
`method), 104`  
`method), 105`  
`method), 79`  
`method), 78`  
`method), 31`  
`method), 33`  
`method), 52`  
`method), 86`  
`method), 79`  
`method), 94`  
`method), 33`  
`method), 97`  
`method), 96`  
`method), 103`

**all\_capabilities()** (b2sdk.v2.SqliteAccountInfo class method), 37  
**all\_capabilities()** (b2sdk.v2.UrlPoolAccountInfo class method), 46  
**all\_files()** (b2sdk.\_internal.scan.folder.AbstractFolder method), 137  
**all\_files()** (b2sdk.\_internal.scan.folder.B2Folder method), 139  
**all\_files()** (b2sdk.\_internal.scan.folder.LocalFolder method), 138  
**all\_versions** (b2sdk.\_internal.scan.path.B2Path attribute), 141  
**allowed\_is\_valid()** (b2sdk.v2.AbstractAccountInfo class method), 40  
**allowed\_is\_valid()** (b2sdk.v2.SqliteAccountInfo class method), 37  
**allowed\_is\_valid()** (b2sdk.v2.UrlPoolAccountInfo class method), 46  
**API** (b2sdk.\_internal.session.TokenType attribute), 106  
**api** (b2sdk.v2.DownloadVersion attribute), 84  
**api** (b2sdk.v2FileVersion attribute), 81  
**API\_TOKEN\_ONLY** (b2sdk.\_internal.session.TokenType attribute), 106  
**API\_URL** (b2sdk.\_internal.raw\_simulator.RawSimulator attribute), 181  
**application key**, 27  
**application key ID**, 27  
**ApplicationKey** (class in b2sdk.v2), 30  
**as\_created\_key()** (b2sdk.\_internal.raw\_simulator.KeySimulator method), 175  
**as\_dict()** (b2sdk.v2.ApplicationKey method), 31  
**as\_dict()** (b2sdk.v2.Bucket method), 63  
**as\_dict()** (b2sdk.v2.DownloadVersion method), 84  
**as\_dict()** (b2sdk.v2.EncryptionSetting method), 105  
**as\_dict()** (b2sdk.v2.FileIdAndName method), 85  
**as\_dict()** (b2sdk.v2FileVersion method), 81  
**as\_dict()** (b2sdk.v2.FullApplicationKey method), 32  
**as\_dict()** (b2sdk.v2.RetentionPeriod method), 79  
**as\_download\_headers()** (b2sdk.\_internal.raw\_simulator.FileSimulator method), 176  
**as\_key()** (b2sdk.\_internal.raw\_simulator.KeySimulator method), 175  
**as\_list\_files\_dict()** (b2sdk.\_internal.raw\_simulator.FileSimulator method), 176  
**as\_list\_parts\_dict()** (b2sdk.\_internal.raw\_simulator.PartSimulator method), 176  
**as\_start\_large\_file\_result()** (b2sdk.\_internal.raw\_simulator.FileSimulator method), 177  
**as\_upload\_result()** (b2sdk.\_internal.raw\_simulator.FileSimulator method), 176  
**AuthInfoCache** (class in b2sdk.\_internal.cache), 131  
**AuthInfoCache** (class in b2sdk.v2), 51  
**authorize\_account()** (b2sdk.\_internal.raw\_api.AbstractRawApi method), 112  
**authorize\_account()** (b2sdk.\_internal.raw\_api.B2RawHTTPApi method), 116  
**authorize\_account()** (b2sdk.\_internal.raw\_simulator.RawSimulator method), 181  
**authorize\_account()** (b2sdk.\_internal.session.B2Session method), 107  
**authorize\_account()** (b2sdk.v2.B2Api method), 54  
**authorize\_automatically()** (b2sdk.\_internal.session.B2Session method), 107  
**authorize\_automatically()** (b2sdk.v2.B2Api method), 54

## B

**b2\_parent\_dir()** (in module b2sdk.\_internal.scan.folder), 139  
**b2\_url\_decode()** (in module b2sdk.\_internal.utils), 125  
**b2\_url\_decode()** (in module b2sdk.v2), 101  
**b2\_url\_encode()** (in module b2sdk.\_internal.utils), 125  
**b2\_url\_encode()** (in module b2sdk.v2), 101  
**B2APISigner** (class in b2sdk.v2), 53  
**B2CopyAction** (class in b2sdk.\_internal.sync.action), 150  
**B2DeleteAction** (class in b2sdk.\_internal.sync.action), 151  
**B2DownloadAction** (class in b2sdk.\_internal.sync.action), 149  
**B2Folder** (class in b2sdk.\_internal.scan.folder), 139  
**B2HideAction** (class in b2sdk.\_internal.sync.action), 148  
**B2Http** (class in b2sdk.\_internal.b2http), 120  
**B2HTTP\_CLASS** (b2sdk.\_internal.session.B2Session attribute), 107  
**B2HttpApiConfig** (class in b2sdk.v2), 59  
**B2IncrementalUploadAction** (class in b2sdk.\_internal.sync.action), 147  
**B2Path** (class in b2sdk.\_internal.scan.path), 141  
**B2RawHTTPApi** (class in b2sdk.\_internal.raw\_api), 115  
**b2sdk interface version**, 27  
**b2sdk version**, 27  
**b2sdk.\_internal.b2http** module, 120  
**b2sdk.\_internal.cache** module, 130  
**b2sdk.\_internal.encryption.types** module, 106

b2sdk.\_internal.raw\_api  
    module, 110  
b2sdk.\_internal.raw\_simulator  
    module, 175  
b2sdk.\_internal.requests  
    module, 125  
b2sdk.\_internal.scan.folder  
    module, 137  
b2sdk.\_internal.scan.folder\_parser  
    module, 137  
b2sdk.\_internal.scan.path  
    module, 140  
b2sdk.\_internal.scan.policies  
    module, 141  
b2sdk.\_internal.scan.scan  
    module, 144  
b2sdk.\_internal.session  
    module, 106  
b2sdk.\_internal.stream.chained  
    module, 132  
b2sdk.\_internal.stream.hashing  
    module, 133  
b2sdk.\_internal.stream.progress  
    module, 134  
b2sdk.\_internal.stream.range  
    module, 135  
b2sdk.\_internal.stream.wrapper  
    module, 136  
b2sdk.\_internal.sync.action  
    module, 146  
b2sdk.\_internal.sync.exception  
    module, 152  
b2sdk.\_internal.sync.policy  
    module, 153  
b2sdk.\_internal.sync.policy\_manager  
    module, 161  
b2sdk.\_internal.sync.sync  
    module, 162  
b2sdk.\_internal.transfer.inbound.download\_manager  
    module, 170  
b2sdk.\_internal.transfer.inbound.downloader.abstract  
    module, 164  
b2sdk.\_internal.transfer.inbound.downloader.parallel  
    module, 166  
b2sdk.\_internal.transfer.inbound.downloader.simple  
    module, 169  
b2sdk.\_internal.transfer.outbound.upload\_source  
    module, 171  
b2sdk.\_internal.utils  
    module, 125  
b2sdk.v2.exception  
    module, 60  
B2Session (class in b2sdk.\_internal.session), 107  
B2TraceMeta (class in b2sdk.\_internal.utils), 129  
B2TraceMetaAbstract (class in b2sdk.\_internal.utils),  
    129  
B2UploadAction (class in b2sdk.\_internal.sync.action),  
    146  
b64\_of\_bytes() (in module b2sdk.\_internal.utils), 127  
BasicSyncEncryptionSettingsProvider (class in  
    b2sdk.v2), 100  
block\_size(b2sdk.\_internal.utils.IncrementalHexDigester  
    attribute), 126  
bucket, 27  
Bucket (class in b2sdk.v2), 60  
BUCKET\_CLASS (b2sdk.v2.B2Api attribute), 53  
bucket\_dict() (b2sdk.\_internal.raw\_simulator.BucketSimulator  
    method), 179  
BUCKET\_FACTORY\_CLASS (b2sdk.v2.B2Api attribute), 53  
bucket\_id (b2sdk.v2FileVersion attribute), 81  
BUCKET\_SIMULATOR\_CLASS  
    (b2sdk.\_internal.raw\_simulator.RawSimulator  
        attribute), 181  
BUCKET\_UPLOAD\_POOL\_CLASS  
    (b2sdk.v2.SqliteAccountInfo attribute), 37  
BUCKET\_UPLOAD\_POOL\_CLASS  
    (b2sdk.v2.UrlPoolAccountInfo  
        attribute), 45  
BucketIdNotFound, 60  
BucketRetentionSetting (class in b2sdk.v2), 78  
BucketSimulator  
    (class  
        in  
            b2sdk.\_internal.raw\_simulator), 178  
build\_response() (b2sdk.\_internal.b2http.NotDecompressingHTTPAdap  
    method), 125  
bytes\_completed() (b2sdk.v2.AbstractProgressListener  
    method), 89

## C

cache (b2sdk.v2.B2Api property), 54  
cache\_control (b2sdk.v2.DownloadVersion attribute),  
    83  
    cache\_control (b2sdk.v2.FileVersion attribute), 81  
    cache\_case\_to\_underscore() (in  
        module  
            b2sdk.\_internal.utils), 129  
    cancel\_set\_as\_bucket\_default()  
        (b2sdk.\_internal.encryption.types.EncryptionMode  
            method), 106  
    cancel\_large\_file()  
        (b2sdk.\_internal.raw\_api.AbstractRawApi  
            method), 112  
    cancel\_large\_file()  
        (b2sdk.\_internal.raw\_api.B2RawHTTPApi  
            method), 116  
    cancel\_large\_file()  
        (b2sdk.\_internal.raw\_simulator.BucketSimulator  
            method), 179  
    cancel\_large\_file()  
        (b2sdk.\_internal.raw\_simulator.RawSimulator  
            method), 181

*method), 181*  
**cancel\_large\_file()** (b2sdk.\_internal.session.B2Session method), 107  
**cancel\_large\_file()** (b2sdk.v2.B2Api method), 54  
**cancel\_large\_file()** (b2sdk.v2.Bucket method), 63  
**ChainedStream** (class in b2sdk.\_internal.stream.chained), 132  
**change\_description()** (b2sdk.v2.AbstractProgressListener method), 89  
**check\_b2\_filename()** (b2sdk.\_internal.raw\_api.B2RawHTTPApi method), 118  
**check\_bucket\_id\_restrictions()** (b2sdk.v2.B2Api method), 54  
**check\_bucket\_name\_restrictions()** (b2sdk.v2.B2Api method), 54  
**CHECK\_ENCRYPTION** (b2sdk.\_internal.raw\_simulator.FileSimulator attribute), 176  
**check\_encryption()** (b2sdk.\_internal.raw\_simulator.FileSimulator method), 177  
**check\_path\_and\_get\_size()** (b2sdk.\_internal.transfer.outbound.upload\_source method), 172  
**choose\_part\_ranges()** (in module b2sdk.\_internal.utils), 126  
**choose\_part\_ranges()** (in module b2sdk.v2), 101  
**circular\_symlink\_skipped()** (b2sdk.v2.SyncReport method), 98  
**cleanup()** (b2sdk.\_internal.stream.chained.StreamOpener method), 133  
**clear()** (b2sdk.\_internal.cache.AbstractCache method), 130  
**clear()** (b2sdk.v2.AbstractAccountInfo method), 41  
**clear()** (b2sdk.v2.AbstractCache method), 51  
**clear()** (b2sdk.v2.AuthInfoCache method), 52  
**clear()** (b2sdk.v2.DummyCache method), 52  
**clear()** (b2sdk.v2.InMemoryCache method), 53  
**clear()** (b2sdk.v2.SqliteAccountInfo method), 34  
**clear()** (b2sdk.v2.UrlPoolAccountInfo method), 45  
**clear\_bucket\_upload\_data()** (b2sdk.v2.AbstractAccountInfo method), 41  
**clear\_bucket\_upload\_data()** (b2sdk.v2.SqliteAccountInfo method), 37  
**clear\_bucket\_upload\_data()** (b2sdk.v2.UrlPoolAccountInfo method), 45  
**clear\_for\_key()** (b2sdk.\_internal.account\_info.upload\_info method), 50  
**clear\_large\_file\_upload\_urls()** (b2sdk.v2.AbstractAccountInfo method), 41  
**clear\_large\_file\_upload\_urls()** (b2sdk.v2.SqliteAccountInfo method), 37  
**clear\_large\_file\_upload\_urls()** (b2sdk.v2.UrlPoolAccountInfo method), 46  
**ClockSkewHook** (class in b2sdk.\_internal.b2http), 120  
**close()** (b2sdk.\_internal.raw\_simulator.FakeResponse method), 178  
**close()** (b2sdk.\_internal.stream.chained.ChainedStream method), 133  
**close()** (b2sdk.\_internal.stream.range.RangeOfInputStream method), 135  
**close()** (b2sdk.v2.AbstractProgressListener method), 89  
**close()** (b2sdk.v2.SyncReport method), 98  
**CompareVersionMode** (class in b2sdk.\_internal.sync.policy), 153  
**CompareVersionMode** (class in b2sdk.v2), 88  
**COMPLIANCE** (b2sdk.v2.RetentionMode attribute), 78  
**concatenate()** (b2sdk.v2.Bucket method), 63  
**concatenate\_stream()** (b2sdk.v2.Bucket method), 64  
**ConcurrentUsedAuthTokenGuard** (class in b2sdk.\_internal.utils), 129  
**CONNECTION\_TIMEOUT** (b2sdk.\_internal.b2http.B2Http attribute), 121  
**content\_disposition** (b2sdk.v2FileVersion property), 81  
**content\_encoding** (b2sdk.v2.DownloadVersion attribute), 83  
**content\_encoding** (b2sdk.v2FileVersion property), 81  
**content\_language** (b2sdk.v2.DownloadVersion attribute), 83  
**content\_language** (b2sdk.v2FileVersion property), 81  
**content\_length** (b2sdk.v2.DownloadVersion attribute), 83  
**content\_md5** (b2sdk.v2FileVersion attribute), 81  
**content\_sha1** (b2sdk.v2.DownloadVersion attribute), 84  
**content\_sha1** (b2sdk.v2FileVersion attribute), 81  
**content\_sha1\_verified** (b2sdk.v2.DownloadVersion attribute), 84  
**content\_sha1\_verified** (b2sdk.v2FileVersion attribute), 81  
**content\_type** (b2sdk.v2.DownloadVersion attribute), 84  
**content\_type** (b2sdk.v2FileVersion attribute), 81  
**convert\_dir\_regex\_to\_dir\_prefix\_regex()** (in module b2sdk.\_internal.scan.policies), 142  
**COPY** (b2sdk.\_internal.UrlPool.raw\_api.MetadataDirectiveMode attribute), 110  
**COPY** (b2sdk.v2.MetadataDirectiveMode attribute), 88  
**copy()** (b2sdk.\_internal.transfer.inbound.downloader.abstract.EmptyHasher method), 165  
**copy()** (b2sdk.v2.Bucket method), 66

copy\_file() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 112  
copy\_file() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 119  
copy\_file() (*b2sdk.\_internal.raw\_simulator.BucketSimulator method*), 179  
copy\_file() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 182  
copy\_file() (*b2sdk.\_internal.session.B2Session method*), 109  
copy\_part() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 112  
copy\_part() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 119  
copy\_part() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 183  
copy\_part() (*b2sdk.\_internal.session.B2Session method*), 110  
CopyAndDeletePolicy (class in *b2sdk.\_internal.sync.policy*), 159  
CopyAndKeepDaysPolicy (class in *b2sdk.\_internal.sync.policy*), 160  
CopyPolicy (class in *b2sdk.\_internal.sync.policy*), 158  
count\_files() (*in module b2sdk.\_internal.sync.sync*), 162  
CountAndSampleScanReport (class in *b2sdk.\_internal.scan.scan*), 145  
counter\_by\_status (*b2sdk.\_internal.scan.scan.CountAndSampleScanReport attribute*), 145  
create\_account() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 181  
create\_bucket() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 112  
create\_bucket() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 116  
create\_bucket() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 181  
create\_bucket() (*b2sdk.\_internal.session.B2Session method*), 107  
create\_bucket() (*b2sdk.v2.B2Api method*), 54  
create\_file() (*b2sdk.v2.Bucket method*), 67  
create\_file\_stream() (*b2sdk.v2.Bucket method*), 69  
create\_key() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 113  
create\_key() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 116  
create\_key() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 182  
create\_key() (*b2sdk.\_internal.session.B2Session method*), 108  
create\_key() (*b2sdk.v2.B2Api method*), 55  
current\_time\_millis() (*in module b2sdk.\_internal.utils*), 130  
customHeaders (*b2sdk.\_internal.raw\_api.NotificationTargetConfiguration*), 130  
  
attribute), 111  
D  
data\_bytes (*b2sdk.\_internal.raw\_simulator.FakeRaw attribute*), 177  
data\_bytes (*b2sdk.\_internal.raw\_simulator.FakeResponse property*), 178  
daysFromHidingToDeleteing  
    (*b2sdk.\_internal.raw\_api.LifecycleRule attribute*), 110  
daysFromUploadingToHiding  
    (*b2sdk.\_internal.raw\_api.LifecycleRule attribute*), 110  
DEFAULT\_ALIGN\_FACTOR  
    (*b2sdk.\_internal.transfer.inbound.downloader.abstractDownloader attribute*), 165  
DEFAULT\_ALLOWED  
    (*b2sdk.v2.AbstractAccountInfo attribute*), 40  
    (*b2sdk.v2.SqliteAccountInfo attribute*), 37  
    (*b2sdk.v2.UrlPoolAccountInfo attribute*), 46  
DEFAULT\_CONTENT\_TYPE (*b2sdk.v2.Bucket attribute*), 62  
DEFAULT\_HEADERS\_LIMIT (*b2sdk.v2FileVersion attribute*), 81  
DEFAULT\_LIST\_KEY\_COUNT (*b2sdk.v2.B2Api attribute*), 54  
DEFAULT\_SCAN\_REPORT\_SIZE  
    (*b2sdk.\_internal.transfer.inbound.download\_manager.DownloadManager attribute*), 170  
    (*b2sdk.\_internal.raw\_simulator.RawSimulator attribute*), 170  
    (*b2sdk.v2.B2HttpApiConfig attribute*), 59  
    (*b2sdk.\_internal.transfer.inbound.downloader.abstractDownloader attribute*), 165  
    (*b2sdk.\_internal.thread\_pool.ThreadPool attribute*), 162  
    (*b2sdk.\_internal.transfer.inbound.download\_manager.DownloadManager attribute*), 165  
    (*b2sdk.\_internal.sync.sync.KeepOrDeleteMode attribute*), 162  
    (*b2sdk.v2.KeepOrDeleteMode attribute*), 88  
    delete() (*b2sdk.v2.DownloadVersion method*), 84  
    delete() (*b2sdk.v2.FileVersion method*), 81  
    delete\_bucket() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 113  
    delete\_bucket() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 116  
    delete\_bucket() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 182  
    delete\_bucket() (*b2sdk.\_internal.session.B2Session method*), 108  
    delete\_bucket() (*b2sdk.v2.B2Api method*), 55  
    delete\_file\_version()  
        (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 113  
        delete\_file\_version()  
            (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 113

```

 method), 116
delete_file_version() do_report() (b2sdk._internal.sync.action.B2DeleteAction
 (b2sdk._internal.raw_simulator.BucketSimulator method), 151
 method), 179
delete_file_version() do_report() (b2sdk._internal.sync.action.B2DownloadAction
 (b2sdk._internal.raw_simulator.RawSimulator method), 150
 method), 182
delete_file_version() do_report() (b2sdk._internal.sync.action.B2HideAction
 (b2sdk._internal.session.B2Session method), 149
 method), 108
delete_file_version() (b2sdk.v2.B2Api method), 56 do_report() (b2sdk._internal.sync.action.B2UploadAction
delete_file_version() (b2sdk.v2.Bucket method), 70 method), 147
delete_key() (b2sdk._internal.raw_api.AbstractRawApi do_report() (b2sdk._internal.sync.action.LocalDeleteAction
 method), 113 method), 152
delete_key() (b2sdk._internal.raw_api.B2RawHTTPApi DownAndDeletePolicy (class in
 method), 116 b2sdk._internal.sync.policy), 157
delete_key() (b2sdk._internal.raw_simulator.RawSimulaDownAndKeepDaysPolicy (class in
 method), 182 b2sdk._internal.sync.policy), 158
delete_key() (b2sdk._internal.session.B2Session download() (b2sdk._internal.transfer.inbound.downloaders.abstract.AbstractD
 method), 108 method), 166
delete_key() (b2sdk.v2.B2Api method), 56 download() (b2sdk._internal.transfer.inbound.downloaders.parallel.Paralle
delete_key_by_id() (b2sdk.v2.B2Api method), 56 download() (b2sdk._internal.transfer.inbound.downloaders.simple.SimpleD
destination_end_offset (b2sdk.v2.WriteIntent prop- download() (b2sdk._internal.transfer.inbound.downloaders.simple.SimpleD
 erty), 103 method), 169
DESTINATION_PREFIX (b2sdk._internal.sync.policy.AbstractDownloadPolicy (b2sdk.v2.FileVersion method), 81
 attribute), 154 download_file_by_id()
DESTINATION_PREFIX (b2sdk._internal.sync.policy.CopyPolicy (b2sdk._internal.raw_simulator.BucketSimulator
 attribute), 159 method), 179
DESTINATION_PREFIX (b2sdk._internal.sync.policy.DownloadPolicy (b2sdk.v2.B2Api method), 56
 attribute), 155 download_file_by_id() (b2sdk.v2.Bucket method), 70
DESTINATION_PREFIX (b2sdk._internal.sync.policy.UpPolicy download_file_by_name() (b2sdk._internal.raw_simulator.BucketSimulator
 attribute), 156 method), 179
digest (b2sdk._internal.utils.IncrementalHexDigester download_file_by_name() (b2sdk.v2.Bucket method),
 attribute), 126 download_file_from_url()
digest() (b2sdk._internal.transfer.inbound.downloaders.abstract.EmptyHasher
 method), 164 download_file_from_url()
do_action() (b2sdk._internal.sync.action.AbstractAction (b2sdk._internal.raw_api.AbstractRawApi
 method), 146 method), 113
do_action() (b2sdk._internal.sync.action.B2CopyAction download_file_from_url()
 method), 150 (b2sdk._internal.raw_api.B2RawHTTPApi
do_action() (b2sdk._internal.sync.action.B2DeleteAction download_file_from_url()
 method), 151 (b2sdk._internal.raw_simulator.RawSimulator
do_action() (b2sdk._internal.sync.action.B2DownloadAction download_file_from_url()
 method), 149 method), 182
do_action() (b2sdk._internal.sync.action.B2HideAction download_file_from_url()
 method), 149 (b2sdk._internal.session.B2Session method),
do_action() (b2sdk._internal.sync.action.B2UploadAction 108
 method), 147 download_file_from_url()
do_action() (b2sdk._internal.sync.action.LocalDeleteAction download_first_part() (in module
 method), 152 b2sdk._internal.transfer.inbound.download_manager.Download_
do_report() (b2sdk._internal.sync.action.AbstractAction download_first_part() (in module
 method), 146 b2sdk._internal.transfer.inbound.downloaders.parallel),
do_report() (b2sdk._internal.sync.action.B2CopyAction 168
 method), 151 download_non_first_part() (in module

```

`b2sdk._internal.transfer.inbound.downloader.parallel_parallel_file_info` (`b2sdk.v2.DownloadVersion` attribute), 84  
168  
`file_info` (`b2sdk.v2FileVersion` attribute), 82  
`DOWNLOAD_URL` (`b2sdk._internal.raw_simulator.RawSimulator` attribute), 181  
`file_name` (`b2sdk.v2.DownloadVersion` attribute), 84  
`file_name` (`b2sdk.v2FileVersion` attribute), 82  
`DOWNLOAD_URL_MATCHER` (`b2sdk._internal.raw_simulator.RawSimulator` attribute), 181  
`file_retention` (`b2sdk.v2.DownloadVersion` attribute), 84  
`file_retention` (`b2sdk.v2FileVersion` attribute), 82  
`DOWNLOAD_VERSION_FACTORY_CLASS` (`b2sdk.v2.B2Api` attribute), 54  
`FILE_SIMULATOR_CLASS` (`b2sdk._internal.raw_simulator.BucketSimulator` attribute), 178  
`FILE_VERSION_FACTORY_CLASS` (`b2sdk.v2.B2Api` attribute), 53  
`DownloadedFile` (class in `b2sdk.v2`), 86  
`FILE_VERSION_FACTORY_CLASS` (`b2sdk.v2.Bucket` attribute), 60  
`DownloadManager` (class in `b2sdk._internal.transfer.inbound.download_manager`), 170  
`FileIdAndName` (class in `b2sdk.v2`), 85  
`DownloadVersion` (class in `b2sdk.v2`), 83  
`FileVersion` (class in `b2sdk.v2`), 80  
`DownPolicy` (class in `b2sdk._internal.sync.policy`), 155  
`FileLockConfiguration` (class in `b2sdk.v2`), 79  
`DummyCache` (class in `b2sdk._internal.cache`), 130  
`fileNamePrefix` (`b2sdk._internal.raw_api.LifecycleRule` attribute), 110  
`dummy` (class in `b2sdk._internal.raw_api.LifecycleRule` attribute), 110  
`FileRetentionSetting` (class in `b2sdk.v2`), 78  
`files_are_different()` (in `b2sdk._internal.sync.policy.AbstractFileSyncPolicy` class method), 154  
`E`  
`EmptyHasher` (class in `b2sdk._internal.transfer.inbound.downloader.abstract`), 164  
`EncryptionAlgorithm` (class in `b2sdk._internal.encryption.types`), 106  
`EncryptionKey` (class in `b2sdk.v2`), 104  
`EncryptionMode` (class in `b2sdk._internal.encryption.types`), 106  
`EncryptionSetting` (class in `b2sdk.v2`), 105  
`end_compare()` (`b2sdk.v2.SyncReport` method), 97  
`end_total()` (`b2sdk.v2.SyncReport` method), 98  
`ensure_non_empty()` (`b2sdk._internal.scan.folder.LocalFolder` method), 139  
`ensure_present()` (`b2sdk._internal.scan.folder.LocalFolder` method), 139  
`error()` (`b2sdk.v2.SyncReport` method), 98  
`eventTypes` (`b2sdk._internal.raw_api.NotificationRule` attribute), 111  
`eventTypes` (`b2sdk._internal.raw_api.NotificationRuleResponse` attribute), 111  
`expire_auth_token()` (`b2sdk._internal.raw_simulator.RawSimulator` method), 181  
`expires` (`b2sdk.v2.DownloadVersion` attribute), 83  
`expires` (`b2sdk.v2.FileVersion` property), 81  
`expires_parsed()` (`b2sdk.v2.DownloadVersion` method), 83  
`expires_parsed()` (`b2sdk.v2.FileVersion` method), 82  
`F`  
`FakeRaw` (class in `b2sdk._internal.raw_simulator`), 177  
`FakeRequest` (class in `b2sdk._internal.raw_simulator`), 177  
`FakeResponse` (class in `b2sdk._internal.raw_simulator`), 177  
`first_file_id` (`b2sdk._internal.raw_simulator.BucketSimulator` attribute), 178  
`first_file_number` (`b2sdk._internal.raw_simulator.BucketSimulator` attribute), 178  
`fix_windows_path_limit()` (in module `b2sdk._internal.utils`), 128  
`fix_windows_path_limit()` (in module `b2sdk.v2`), 101  
`flush()` (`b2sdk._internal.stream.wrapper.StreamWrapper` method), 136

**folder\_type()** (*b2sdk.\_internal.scan.folder.AbstractFolder* method), 138  
**get\_account\_id()** (*b2sdk.v2.SqliteAccountInfo* method), 34  
**get\_account\_id()** (*b2sdk.v2.UrlPoolAccountInfo* method), 47  
**get\_all\_actions()** (*b2sdk.\_internal.sync.policy.AbstractFileSyncPolicy* method), 155  
**get\_all\_sources()** (*b2sdk.\_internal.sync.action.B2IncrementalUploadAction* method), 148  
**get\_all\_sources()** (*b2sdk.\_internal.sync.action.B2UploadAction* method), 147  
**get\_allowed()** (*b2sdk.\_internal.raw\_simulator.KeySimulator* method), 175  
**get\_allowed()** (*b2sdk.v2.AbstractAccountInfo* method), 41  
**get\_allowed()** (*b2sdk.v2.SqliteAccountInfo* method), 35  
**get\_allowed()** (*b2sdk.v2.UrlPoolAccountInfo* method), 47  
**get\_api\_url()** (*b2sdk.v2.AbstractAccountInfo* method), 41  
**get\_api\_url()** (*b2sdk.v2.SqliteAccountInfo* method), 35  
**get\_api\_url()** (*b2sdk.v2.UrlPoolAccountInfo* method), 47  
**get\_application\_key()** (*b2sdk.v2.AbstractAccountInfo* method), 41  
**get\_application\_key()** (*b2sdk.v2.SqliteAccountInfo* method), 34  
**get\_application\_key()** (*b2sdk.v2.UrlPoolAccountInfo* method), 47  
**get\_application\_key\_id()** (*b2sdk.v2.AbstractAccountInfo* method), 41  
**get\_absolute\_minimum\_part\_size()** (*b2sdk.v2.AbstractAccountInfo* method), 41  
**get\_absolute\_minimum\_part\_size()** (*b2sdk.v2.SqliteAccountInfo* method), 35  
**get\_absolute\_minimum\_part\_size()** (*b2sdk.v2.UrlPoolAccountInfo* method), 46  
**get\_account\_auth\_token()** (*b2sdk.v2.AbstractAccountInfo* method), 41  
**get\_account\_auth\_token()** (*b2sdk.v2.SqliteAccountInfo* method), 35  
**get\_account\_auth\_token()** (*b2sdk.v2.UrlPoolAccountInfo* method), 47  
**get\_account\_id()** (*b2sdk.v2.AbstractAccountInfo* method), 41  
**get\_account\_id()** (*b2sdk.v2.B2Api* method), 56

## G

**gen\_parts()** (*in module b2sdk.\_internal.transfer.inbound.downloader.parallel*), 168  
**get\_application\_key\_id()** (*b2sdk.v2.SqliteAccountInfo* method), 34  
**get\_application\_key\_id()** (*b2sdk.v2.UrlPoolAccountInfo* method), 47  
**get\_bucket\_by\_id()** (*b2sdk.v2.B2Api* method), 53  
**get\_bucket\_by\_name()** (*b2sdk.v2.B2Api* method), 56  
**get\_bucket\_id\_or\_none\_from\_bucket\_name()** (*b2sdk.\_internal.cache.AbstractCache* method), 130  
**get\_bucket\_id\_or\_none\_from\_bucket\_name()** (*b2sdk.\_internal.cache.AuthInfoCache* method), 132  
**get\_bucket\_id\_or\_none\_from\_bucket\_name()** (*b2sdk.\_internal.cache.DummyCache* method), 130  
**get\_bucket\_id\_or\_none\_from\_bucket\_name()** (*b2sdk.\_internal.cache.InMemoryCache* method), 131  
**get\_bucket\_id\_or\_none\_from\_bucket\_name()** (*b2sdk.v2.AbstractAccountInfo* method), 42



```

get_content_sha1() (b2sdk.v2.DownloadVersion
 method), 84
get_content_sha1() (b2sdk.v2FileVersion method), 82
get_content_sha1() (b2sdk.v2.OutboundTransferSource
 method), 104
get_content_sha1() (b2sdk.v2.WriteIntent method), 103
get_destination_setting_for_copy() (b2sdk.v2.AbstractSyncEncryptionSettingsProvider
 method), 100
get_digest() (b2sdk._internal.stream.hashing.StreamWithDigests
 class method), 134
get_download_authorization() (b2sdk._internal.raw_api.AbstractRawApi
 method), 113
get_download_authorization() (b2sdk._internal.raw_api.B2RawHTTPApi
 method), 117
get_download_authorization() (b2sdk._internal.raw_simulator.RawSimulator
 method), 182
get_download_authorization() (b2sdk._internal.session.B2Session method),
 108
get_download_authorization() (b2sdk.v2.Bucket method), 71
get_download_url() (b2sdk.v2.AbstractAccountInfo
 method), 42
get_download_url() (b2sdk.v2.Bucket method), 71
get_download_url() (b2sdk.v2.SqliteAccountInfo
 method), 35
get_download_url() (b2sdk.v2.UrlPoolAccountInfo
 method), 47
get_download_url_by_id() (b2sdk._internal.raw_api.AbstractRawApi
 method), 115
get_download_url_by_id() (b2sdk._internal.session.B2Session method),
 109
get_download_url_by_name() (b2sdk._internal.raw_api.AbstractRawApi
 method), 115
get_download_url_by_name() (b2sdk._internal.session.B2Session method),
 109
get_download_url_for_file_name() (b2sdk.v2.B2Api method), 57
get_download_url_for_fileid() (b2sdk.v2.B2Api
 method), 57
get_file() (b2sdk._internal.raw_simulator.BucketSimulator
 method), 178
get_file_info() (b2sdk.v2.B2Api method), 57
get_file_info_by_id() (b2sdk._internal.raw_api.AbstractRawApi
 method), 113
get_file_info_by_id() (b2sdk._internal.raw_api.B2RawHTTPApi
 method), 117
get_file_info_by_id() (b2sdk._internal.raw_simulator.BucketSimulator
 method), 179
get_file_info_by_id() (b2sdk._internal.raw_simulator.RawSimulator
 method), 182
get_file_info_by_id() (b2sdk._internal.session.B2Session method),
 108
get_file_info_by_id() (b2sdk.v2.Bucket method), 71
get_file_info_by_name() (b2sdk._internal.raw_api.AbstractRawApi
 method), 113
get_file_info_by_name() (b2sdk._internal.raw_api.B2RawHTTPApi
 method), 117
get_file_info_by_name() (b2sdk._internal.raw_simulator.BucketSimulator
 method), 179
get_file_info_by_name() (b2sdk._internal.raw_simulator.RawSimulator
 method), 182
get_file_info_by_name() (b2sdk._internal.session.B2Session method),
 108
get_file_info_by_name() (b2sdk.v2.B2Api method), 57
get_file_info_by_name() (b2sdk.v2.Bucket method),
 71
get_file_mtime() (in module b2sdk._internal.utils),
 128
get_file_versions() (b2sdk._internal.scan.folder.B2Folder method),
 139
get_fresh_state() (b2sdk.v2.Bucket method), 60
get_fresh_state() (b2sdk.v2FileVersion method), 82
get_id() (b2sdk.v2.Bucket method), 72
get_incremental_sources() (b2sdk._internal.transfer.outbound.upload_source.UploadSource
 method), 173
get_key() (b2sdk.v2.B2Api method), 57
get_length() (b2sdk._internal.encryption.types.EncryptionAlgorithm
 method), 106
get_notification_rules() (b2sdk._internal.raw_simulator.BucketSimulator
 method), 180
get_notification_rules() (b2sdk.v2.Bucket method), 72
get_policy() (b2sdk._internal.sync.policy_manager.SyncPolicyManager
 method)

```

method), 161  
get\_policy\_class() (*b2sdk.\_internal.sync.policy\_manager.SyncPolicyManager* method), 162  
get\_realm() (*b2sdk.v2.AbstractAccountInfo* method), 42  
get\_realm() (*b2sdk.v2.SqliteAccountInfo* method), 35  
get\_realm() (*b2sdk.v2.UrlPoolAccountInfo* method), 48  
get\_recommended\_part\_size() (*b2sdk.v2.AbstractAccountInfo* method), 42  
get\_recommended\_part\_size() (*b2sdk.v2.SqliteAccountInfo* method), 35  
get\_recommended\_part\_size() (*b2sdk.v2.UrlPoolAccountInfo* method), 48  
get\_s3\_api\_url() (*b2sdk.v2.AbstractAccountInfo* method), 42  
get\_s3\_api\_url() (*b2sdk.v2.SqliteAccountInfo* method), 36  
get\_s3\_api\_url() (*b2sdk.v2.UrlPoolAccountInfo* method), 48  
get\_setting\_for\_download() (*b2sdk.v2.AbstractSyncEncryptionSettingsProvider* method), 100  
get\_setting\_for\_upload() (*b2sdk.v2.AbstractSyncEncryptionSettingsProvider* method), 99  
get\_source\_setting\_for\_copy() (*b2sdk.v2.AbstractSyncEncryptionSettingsProvider* method), 100  
get\_upload\_file\_headers() (*b2sdk.\_internal.raw\_api.AbstractRawApi* class method), 114  
get\_upload\_file\_headers() (*b2sdk.\_internal.raw\_simulator.RawSimulator* class method), 184  
get\_upload\_part\_url() (*b2sdk.\_internal.raw\_api.AbstractRawApi* method), 113  
get\_upload\_part\_url() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi* method), 117  
get\_upload\_part\_url() (*b2sdk.\_internal.raw\_simulator.BucketSimulator* method), 179  
get\_upload\_part\_url() (*b2sdk.\_internal.raw\_simulator.RawSimulator* method), 182  
get\_upload\_part\_url() (*b2sdk.\_internal.session.B2Session* method), 108  
get\_upload\_url() (*b2sdk.\_internal.raw\_api.AbstractRawApi* method), 113  
get\_upload\_url() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi* method), 117  
get\_upload\_url() (*b2sdk.\_internal.raw\_simulator.BucketSimulator* method), 179  
get\_upload\_url() (*b2sdk.\_internal.raw\_simulator.RawSimulator* method), 182  
get\_upload\_url() (*b2sdk.\_internal.session.B2Session* method), 108  
GOVERNANCE (*b2sdk.v2.RetentionMode* attribute), 78

## H

has\_capabilities() (*b2sdk.v2.ApplicationKey* method), 31  
has\_capabilities() (*b2sdk.v2.FullApplicationKey* method), 32  
has\_errors\_or\_warnings() (*b2sdk.v2.SyncReport* method), 98  
has\_large\_header (*b2sdk.v2FileVersion* property), 82  
head\_content() (*b2sdk.\_internal.b2http.B2Http* method), 124  
headers (*b2sdk.\_internal.raw\_simulator.FakeRequest* attribute), 177  
hex\_digest (*b2sdk.\_internal.utils.IncrementalHexDigester* property), 126  
hex\_md5\_of\_bytes() (in module *b2sdk.\_internal.utils*), 127  
hex\_sha1\_of\_bytes() (in module *b2sdk.\_internal.utils*), 127  
hex\_sha1\_of\_bytes() (in module *b2sdk.v2*), 102  
hex\_sha1\_of\_file() (in module *b2sdk.\_internal.utils*), 127  
hex\_sha1\_of\_stream() (in module *b2sdk.\_internal.utils*), 126  
hex\_sha1\_of\_stream() (in module *b2sdk.v2*), 102  
hex\_sha1\_of\_unlimited\_stream() (in module *b2sdk.\_internal.utils*), 127  
hexdigest() (*b2sdk.\_internal.transfer.inbound.downloader.abstract.Empty* method), 164  
hide\_file() (*b2sdk.\_internal.raw\_api.AbstractRawApi* method), 113  
hide\_file() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi* method), 117  
hide\_file() (*b2sdk.\_internal.raw\_simulator.BucketSimulator* method), 179  
hide\_file() (*b2sdk.\_internal.raw\_simulator.RawSimulator* method), 182  
hide\_file() (*b2sdk.\_internal.session.B2Session* method), 108  
hide\_file() (*b2sdk.v2.Bucket* method), 72  
MacSha256SigningSecret (*b2sdk.\_internal.raw\_api.NotificationTargetConfiguration* attribute), 111  
HttpCallback (class in *b2sdk.\_internal.b2http*), 120

## I

**id\_**(*b2sdk.v2.DownloadVersion attribute*), 84  
**id\_**(*b2sdk.v2FileVersion attribute*), 82  
**IncompleteSync**, 152  
**INCREMENTAL**(*b2sdk.\_internal.transfer.outbound.upload\_source.upload\_attribute*), 171  
**IncrementalHexDigester** (class in *b2sdk.\_internal.utils*), 126  
**InMemoryAccountInfo** (class in *b2sdk.v2*), 32  
**InMemoryCache** (class in *b2sdk.\_internal.cache*), 131  
**InMemoryCache** (class in *b2sdk.v2*), 52  
**IntegerRange** (class in *b2sdk.\_internal.scan.policies*), 142  
**invalid\_name()** (*b2sdk.v2.SyncReport method*), 98  
**is\_allowed\_to\_read\_bucket\_encryption\_setting()** (*b2sdk.\_internal.raw\_simulator.BucketSimulator method*), 178  
**is\_allowed\_to\_read\_bucket\_retention()** (*b2sdk.\_internal.raw\_simulator.BucketSimulator method*), 178  
**is\_allowed\_to\_read\_file\_legal\_hold()** (*b2sdk.\_internal.raw\_simulator.FileSimulator method*), 177  
**is\_allowed\_to\_read\_file\_retention()** (*b2sdk.\_internal.raw\_simulator.FileSimulator method*), 176  
**is\_copy()** (*b2sdk.\_internal.transfer.outbound.upload\_source.AbstractUploadDataSource method*), 171  
**is\_copy()** (*b2sdk.v2.OutboundTransferSource method*), 104  
**is\_copy()** (*b2sdk.v2.WriteIntent method*), 103  
**is\_file\_readable()** (in module *b2sdk.\_internal.utils*), 128  
**is\_master\_key()** (*b2sdk.v2.AbstractAccountInfo method*), 42  
**is\_master\_key()** (*b2sdk.v2.SqliteAccountInfo method*), 37  
**is\_master\_key()** (*b2sdk.v2.UrlPoolAccountInfo method*), 48  
**is\_off()** (*b2sdk.v2.LegalHold method*), 78  
**is\_on()** (*b2sdk.v2.LegalHold method*), 78  
**is\_same\_account()** (*b2sdk.v2.AbstractAccountInfo method*), 42  
**is\_same\_account()** (*b2sdk.v2.SqliteAccountInfo method*), 37  
**is\_same\_account()** (*b2sdk.v2.UrlPoolAccountInfo method*), 48  
**is\_same\_key()** (*b2sdk.v2.AbstractAccountInfo method*), 43  
**is\_same\_key()** (*b2sdk.v2.SqliteAccountInfo method*), 38  
**is\_same\_key()** (*b2sdk.v2.UrlPoolAccountInfo method*), 48  
**is\_sha1\_known()** (*b2sdk.\_internal.transfer.outbound.upload\_source.UploadMode method*), 173  
**is\_sha1\_known()** (*b2sdk.\_internal.transfer.outbound.upload\_source.UploadMethod method*), 172  
**is\_sha1\_known()** (*b2sdk.\_internal.transfer.outbound.upload\_source.UploadMethod method*), 174  
**is\_special\_file()** (in module *b2sdk.\_internal.utils*), 128  
**is\_suitable()** (*b2sdk.\_internal.transfer.inbound.downloader.abstract.AbstractDownloader method*), 165  
**is\_unknown()** (*b2sdk.v2.LegalHold method*), 78  
**is\_upload()** (*b2sdk.\_internal.transfer.outbound.upload\_source.AbstractUploadDataSource method*), 171  
**is\_upload()** (*b2sdk.v2.OutboundTransferSource method*), 104  
**is\_upload()** (*b2sdk.v2.WriteIntent method*), 103  
**is\_visible()** (*b2sdk.\_internal.raw\_simulator.FileSimulator method*), 177  
**is\_visible()** (*b2sdk.\_internal.scan.path.AbstractPath method*), 140  
**is\_visible()** (*b2sdk.\_internal.scan.path.B2Path method*), 141  
**is\_visible()** (*b2sdk.\_internal.scan.path.LocalPath method*), 140  
**isEnabled** (*b2sdk.\_internal.raw\_api.NotificationRule attribute*), 111  
**isEnabled**(*b2sdk.\_internal.raw\_api.NotificationRuleResponse attribute*), 111  
**isSuspended** (*b2sdk.\_internal.raw\_api.NotificationRule attribute*), 111  
**isSuspended**(*b2sdk.\_internal.raw\_api.NotificationRuleResponse attribute*), 111  
**iter\_content()** (*b2sdk.\_internal.raw\_simulator.FakeResponse method*), 178  
**iter\_content()** (*b2sdk.\_internal.requests.NotDecompressingResponse method*), 125  
**iterator\_peek()** (in module *b2sdk.\_internal.utils*), 130

## J

**join\_b2\_path()** (in module *b2sdk.\_internal.scan.folder*), 138

## K

**KEEP\_BEFORE\_DELETE** (*b2sdk.\_internal.sync.sync.KeepOrDeleteMode attribute*), 162  
**KEEP\_BEFORE\_DELETE** (*b2sdk.v2.KeepOrDeleteMode attribute*), 88  
**KeepOrDeleteMode** (class in *b2sdk.\_internal.sync.sync*), 162  
**KeepOrDeleteMode** (class in *b2sdk.v2*), 88  
**KeySimulator** (class in *b2sdk.\_internal.raw\_simulator*), 175  
**KNOWN\_UNTIL\_TS** (*b2sdk.\_internal.upload.UploadRetentionPeriod attribute*), 79

**L**

LARGE\_FILE\_UPLOAD\_POOL\_CLASS  
    (*b2sdk.v2.SqliteAccountInfo attribute*), 37

LARGE\_FILE\_UPLOAD\_POOL\_CLASS  
    (*b2sdk.v2.UrlPoolAccountInfo attribute*), 45

legal\_hold (*b2sdk.v2.DownloadVersion attribute*), 84

legal\_hold (*b2sdk.v2FileVersion attribute*), 82

LegalHold (*class in b2sdk.v2*), 78

length (*b2sdk.v2.WriteIntent property*), 103

LifecycleRule (*class in b2sdk.\_internal.raw\_api*), 110

list\_bucket\_names\_ids()  
    (*b2sdk.\_internal.cache.AbstractCache method*), 130

list\_bucket\_names\_ids()  
    (*b2sdk.\_internal.cache.AuthInfoCache method*), 132

list\_bucket\_names\_ids()  
    (*b2sdk.\_internal.cache.DummyCache method*), 131

list\_bucket\_names\_ids()  
    (*b2sdk.\_internal.cache.InMemoryCache method*), 131

list\_bucket\_names\_ids()  
    (*b2sdk.v2.AbstractAccountInfo method*), 40

list\_bucket\_names\_ids() (*b2sdk.v2.AbstractCache method*), 51

list\_bucket\_names\_ids() (*b2sdk.v2.AuthInfoCache method*), 51

list\_bucket\_names\_ids() (*b2sdk.v2.DummyCache method*), 52

list\_bucket\_names\_ids()  
    (*b2sdk.v2.InMemoryCache method*), 52

list\_bucket\_names\_ids()  
    (*b2sdk.v2.SqliteAccountInfo method*), 36

list\_bucket\_names\_ids()  
    (*b2sdk.v2.UrlPoolAccountInfo method*), 48

list\_buckets() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 113

list\_buckets() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 117

list\_buckets() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 183

list\_buckets() (*b2sdk.\_internal.session.B2Session method*), 108

list\_buckets() (*b2sdk.v2.B2Api method*), 58

list\_file\_names() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 113

list\_file\_names() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 117

list\_file\_names() (*b2sdk.\_internal.raw\_simulator.BucketSimulator method*), 179

list\_file\_names() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 183

*method*), 183

list\_file\_names() (*b2sdk.\_internal.session.B2Session method*), 108

list\_file\_versions()  
    (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 114

list\_file\_versions()  
    (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 117

list\_file\_versions()  
    (*b2sdk.\_internal.raw\_simulator.BucketSimulator method*), 179

list\_file\_versions()  
    (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 183

list\_file\_versions()  
    (*b2sdk.\_internal.session.B2Session method*), 108

list\_file\_versions() (*b2sdk.v2.Bucket method*), 72

list\_keys() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 114

list\_keys() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 117

list\_keys() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 183

list\_keys() (*b2sdk.\_internal.session.B2Session method*), 108

list\_keys() (*b2sdk.v2.B2Api method*), 58

list\_parts() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 114

list\_parts() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 117

list\_parts() (*b2sdk.\_internal.raw\_simulator.BucketSimulator method*), 180

list\_parts() (*b2sdk.\_internal.raw\_simulator.FileSimulator method*), 177

list\_parts() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 183

list\_parts() (*b2sdk.\_internal.session.B2Session method*), 109

list\_parts() (*b2sdk.v2.B2Api method*), 58

list\_parts() (*b2sdk.v2.Bucket method*), 72

list\_unfinished\_large\_files()  
    (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 114

list\_unfinished\_large\_files()  
    (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 117

list\_unfinished\_large\_files()  
    (*b2sdk.\_internal.raw\_simulator.BucketSimulator method*), 180

list\_unfinished\_large\_files()  
    (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 183

**list\_unfinished\_large\_files()** (*b2sdk.\_internal.session.B2Session* method), 109  
**list\_unfinished\_large\_files()** (*b2sdk.v2.Bucket* method), 72  
**local\_access\_error()** (*b2sdk.v2.SyncReport* method), 98  
**local\_permission\_error()** (*b2sdk.v2.SyncReport* method), 98  
**LocalDeleteAction** (class in *b2sdk.\_internal.sync.action*), 152  
**LocalFolder** (class in *b2sdk.\_internal.scan.folder*), 138  
**LocalPath** (class in *b2sdk.\_internal.scan.path*), 140  
**ls()** (*b2sdk.v2.Bucket* method), 73

**M**

**make\_b2\_delete\_actions()** (in *b2sdk.\_internal.sync.policy*), 160  
**make\_b2\_delete\_note()** (in *b2sdk.\_internal.sync.policy*), 160  
**make\_b2\_keep\_days\_actions()** (in *b2sdk.\_internal.sync.policy*), 161  
**make\_full\_path()** (*b2sdk.\_internal.scan.folder.AbstractFolder* method), 138  
**make\_full\_path()** (*b2sdk.\_internal.scan.folder.B2Folder* method), 139  
**make\_full\_path()** (*b2sdk.\_internal.scan.folder.LocalFolder* method), 139  
**make\_progress\_listener()** (in module *b2sdk.v2*), 90  
**master application key**, 27  
**matches()** (*b2sdk.\_internal.scan.policies.RegexSet* method), 141  
**MAX\_CHUNK\_SIZE** (*b2sdk.\_internal.transfer.inbound.download\_manager* attribute), 170  
**MAX\_DURATION\_IN\_SECONDS** (*b2sdk.\_internal.raw\_simulator.RawSimulator* attribute), 181  
**MAX\_PART\_ID** (*b2sdk.\_internal.raw\_simulator.RawSimulator* attribute), 181  
**MAX\_SIMPLE\_COPY\_SIZE** (*b2sdk.\_internal.raw\_simulator.BucketSimulator* attribute), 178  
**md5\_of\_bytes()** (in module *b2sdk.\_internal.utils*), 127  
**MetadataDirectiveMode** (class in *b2sdk.\_internal.raw\_api*), 110  
**MetadataDirectiveMode** (class in *b2sdk.v2*), 88  
**MIN\_CHUNK\_SIZE** (*b2sdk.\_internal.transfer.inbound.download\_manager* attribute), 170  
**MIN\_PART\_SIZE** (*b2sdk.\_internal.raw\_simulator.RawSimulator* attribute), 181  
**mod\_time** (*b2sdk.\_internal.scan.path.B2Path* property), 141  
**mod\_time** (*b2sdk.\_internal.scan.path.LocalPath* attribute), 141  
**mod\_time\_millis** (*b2sdk.v2.DownloadVersion* attribute), 84  
**mod\_time\_millis** (*b2sdk.v2FileVersion* attribute), 82  
**MODTIME** (*b2sdk.\_internal.sync.policy.CompareVersionMode* attribute), 153  
**MODTIME** (*b2sdk.v2.CompareVersionMode* attribute), 88  
**module**  
*b2sdk.\_internal.b2http*, 120  
*b2sdk.\_internal.cache*, 130  
*b2sdk.\_internal.encryption.types*, 106  
*b2sdk.\_internal.raw\_api*, 110  
*b2sdk.\_internal.raw\_simulator*, 175  
*b2sdk.\_internal.requests*, 125  
*b2sdk.\_internal.scan.folder*, 137  
*b2sdk.\_internal.scan.folder\_parser*, 137  
*b2sdk.\_internal.scan.path*, 140  
*b2sdk.\_internal.scan.policies*, 141  
*b2sdk.\_internal.scan.scan*, 144  
*b2sdk.\_internal.session*, 106  
*b2sdk.\_internal.stream.chained*, 132  
*b2sdk.\_internal.stream.hashing*, 133  
*b2sdk.\_internal.stream.progress*, 134  
*b2sdk.\_internal.stream.range*, 135  
*b2sdk.\_internal.stream.wrapper*, 136  
*b2sdk.\_internal.sync.action*, 146  
*b2sdk.\_internal.sync.exception*, 152  
*b2sdk.\_internal.sync.policy*, 153  
*b2sdk.\_internal.sync.policy\_manager*, 161  
*b2sdk.\_internal.sync.sync*, 162  
*b2sdk.\_internal.transfer.inbound.download\_manager*, 170  
*b2sdk.\_internal.transfer.inbound.downloader.abstract*, 164  
*DownloadManager*  
*b2sdk.\_internal.transfer.inbound.downloader.parallel*, 166  
*b2sdk.\_internal.transfer.inbound.downloader.simple*, 169  
*b2sdk.\_internal.transfer.outbound.upload\_source*, 171  
*b2sdk.\_internal.utils*, 125  
*b2sdk.v2.exception*, 60  
**MtimeUpdatedFile** (class in *b2sdk.v2*), 87

**N**

**name** (*b2sdk.\_internal.raw\_api.NameValueDict* attribute), 111  
**name** (*b2sdk.\_internal.download\_manager.NotificationRule* attribute), 111  
**name** (*b2sdk.\_internal.raw\_api.NotificationRuleResponse* attribute), 112  
**NameValueDict** (class in *b2sdk.\_internal.raw\_api*), 110  
**NewerFileSyncMode** (class in *b2sdk.\_internal.sync.policy*), 153  
**NewerFileSyncMode** (class in *b2sdk.v2*), 88

NO\_DELETE (*b2sdk.\_internal.sync.sync.KeepOrDeleteMode* ParallelDownloader  
attribute), 162  
NO\_DELETE (*b2sdk.v2.KeepOrDeleteMode* attribute), 88  
no\_progress (*b2sdk.v2.SyncReport* attribute), 99  
NO\_RETENTION\_BUCKET\_SETTING (*in module b2sdk.v2*),  
80  
NO\_RETENTION\_FILE\_SETTING (*in module b2sdk.v2*),  
80  
non-master application key, 27  
NONE (*b2sdk.\_internal.encryption.types.EncryptionMode*  
attribute), 106  
NONE (*b2sdk.\_internal.sync.policy.CompareVersionMode*  
attribute), 153  
NONE (*b2sdk.v2.CompareVersionMode* attribute), 88  
NONE (*b2sdk.v2.RetentionMode* attribute), 78  
NotDecompressingHTTPAdapter (class in  
*b2sdk.\_internal.b2http*), 124  
NotDecompressingResponse (class in  
*b2sdk.\_internal.requests*), 125  
notification\_rule\_response\_to\_request() (*in*  
*module b2sdk.\_internal.raw\_api*), 112  
NotificationRule (class in *b2sdk.\_internal.raw\_api*),  
111  
NotificationRuleResponse (class in  
*b2sdk.\_internal.raw\_api*), 111  
NotificationTargetConfiguration (class in  
*b2sdk.\_internal.raw\_api*), 111

**O**

objectNamePrefix (*b2sdk.\_internal.raw\_api.NotificationRule*  
attribute), 111  
objectNamePrefix (*b2sdk.\_internal.raw\_api.NotificationRuleResponse*  
attribute), 112  
OFF (*b2sdk.v2.LegalHold* attribute), 78  
ON (*b2sdk.v2.LegalHold* attribute), 78  
open() (*b2sdk.\_internal.transfer.outbound.upload\_source.AbstractUploadSource*  
method), 171  
open() (*b2sdk.\_internal.transfer.outbound.upload\_source.UploadSourceByBytes*  
method), 172  
open() (*b2sdk.\_internal.transfer.outbound.upload\_source.UploadSourceByDatabase*  
method), 173  
open() (*b2sdk.\_internal.transfer.outbound.upload\_source.UploadSourceLocalFileRange*  
method), 173  
open() (*b2sdk.\_internal.transfer.outbound.upload\_source.UploadSourceStreamRange*  
method), 174  
open() (*b2sdk.\_internal.transfer.outbound.upload\_source.UploadSourceStreamRange*  
method), 175  
OutboundTransferSource (class in *b2sdk.v2*), 104

**P**

PARALLEL\_DOWNLOADER\_CLASS  
(*b2sdk.\_internal.transfer.inbound.download\_manager.DownloadManager*  
attribute), 170

ParallelDownloader (class in  
*b2sdk.\_internal.transfer.inbound.downloader.parallel*),  
166  
parse\_folder() (in module  
*b2sdk.\_internal.scan.folder\_parser*), 137  
parse\_response\_dict() (*b2sdk.v2.ApplicationKey*  
class method), 31  
parse\_response\_dict()  
(*b2sdk.v2.FullApplicationKey* class method),  
32  
Part (class in *b2sdk.v2*), 85  
PartSimulator (class in  
*b2sdk.\_internal.raw\_simulator*), 175  
PartToDownload (class in  
*b2sdk.\_internal.transfer.inbound.downloader.parallel*),  
168  
path\_ (*b2sdk.v2.MtimeUpdatedFile* property), 87  
post\_content\_return\_json()  
(*b2sdk.\_internal.b2http.B2Http* method),  
122  
post\_json\_return\_json()  
(*b2sdk.\_internal.b2http.B2Http* method),  
123  
post\_request() (*b2sdk.\_internal.b2http.ClockSkewHook*  
method), 120  
post\_request() (*b2sdk.\_internal.b2http.HttpCallback*  
method), 120  
pre\_request() (*b2sdk.\_internal.b2http.HttpCallback*  
method), 120  
print\_completion() (*b2sdk.v2.SyncReport* method),  
99  
ProgressListenerForTest (class in *b2sdk.v2*), 90  
put() (*b2sdk.\_internal.account\_info.upload\_url\_pool.UploadUrlPool*  
method), 50  
put\_bucket\_upload\_url()  
*b2sdk.v2.AbstractAccountInfo* method), 43  
put\_bucket\_upload\_url()  
(*b2sdk.v2.SqliteAccountInfo* method), 38  
put\_bucket\_upload\_url()  
(*b2sdk.v2.UrlPoolAccountInfo* method), 45  
put\_large\_file\_upload\_url()  
(*b2sdk.v2.AbstractAccountInfo* method),  
43  
put\_large\_file\_upload\_url()  
(*b2sdk.v2.UrlPoolAccountInfo* method), 46  
put\_large\_file\_upload\_url()  
(*b2sdk.v2.UrlPoolAccountInfo* method), 46

**R**

RAISE\_ERROR (*b2sdk.\_internal.sync.policy.NewerFileSyncMode*  
attribute), 153  
RAISE\_ERROR (*b2sdk.v2.NewerFileSyncMode* attribute),  
88

random() (*in module b2sdk.\_internal.b2http*), 120  
**Range** (*class in b2sdk.v2*), 86  
**range\_** (*b2sdk.v2.DownloadVersion attribute*), 83  
**RangeOfInputStream** (*class in b2sdk.\_internal.stream.range*), 135  
**raw\_api** (*b2sdk.v2.B2Api property*), 58  
**RawSimulator** (*class in b2sdk.\_internal.raw\_simulator*), 181  
**read()** (*b2sdk.\_internal.raw\_simulator.FakeRaw method*), 177  
**read()** (*b2sdk.\_internal.stream.chained.ChainedStream method*), 133  
**read()** (*b2sdk.\_internal.stream.hashing.StreamWithHash method*), 133  
**read()** (*b2sdk.\_internal.stream.progress.ReadingStreamWithProgress method*), 134  
**read()** (*b2sdk.\_internal.stream.range.RangeOfInputStream method*), 135  
**read()** (*b2sdk.\_internal.stream.wrapper.StreamWrapper method*), 136  
**read()** (*b2sdk.v2.MtimeUpdatedFile method*), 87  
**read\_bytes** (*b2sdk.\_internal.utils.IncrementalHexDigesterRFC attribute*), 126  
**readable()** (*b2sdk.\_internal.stream.chained.ChainedStream method*), 133  
**readable()** (*b2sdk.\_internal.stream.wrapper.StreamWrapper method*), 136  
**ReadingStreamWriterWithProgress** (*class in b2sdk.\_internal.stream.progress*), 134  
**refresh\_entire\_bucket\_name\_cache()** (*b2sdk.v2.AbstractAccountInfo method*), 43  
**refresh\_entire\_bucket\_name\_cache()** (*b2sdk.v2.SqliteAccountInfo method*), 36  
**refresh\_entire\_bucket\_name\_cache()** (*b2sdk.v2.UrlPoolAccountInfo method*), 49  
**RegexSet** (*class in b2sdk.\_internal.scan.policies*), 141  
**relative\_path** (*b2sdk.\_internal.scan.path.B2Path attribute*), 141  
**relative\_path** (*b2sdk.\_internal.scan.path.LocalPath attribute*), 141  
**remove\_bucket\_name()** (*b2sdk.v2.AbstractAccountInfo method*), 43  
**remove\_bucket\_name()** (*b2sdk.v2.SqliteAccountInfo method*), 36  
**remove\_bucket\_name()** (*b2sdk.v2.UrlPoolAccountInfo method*), 49  
**REPLACE** (*b2sdk.\_internal.raw\_api.MetadataDirectiveMode attribute*), 110  
**REPLACE** (*b2sdk.\_internal.sync.policy.NewerFileSyncMode attribute*), 153  
**REPLACE** (*b2sdk.v2.MetadataDirectiveMode attribute*), 88  
**REPLACE** (*b2sdk.v2.NewerFileSyncMode attribute*), 88  
**replication\_status** (*b2sdk.v2.DownloadVersion attribute*), 84  
**replication\_status** (*b2sdk.v2.FileVersion attribute*), 82  
**request** (*b2sdk.\_internal.raw\_simulator.FakeResponse property*), 178  
**request()** (*b2sdk.\_internal.b2http.B2Http method*), 121  
**request\_content\_return\_json()** (*b2sdk.\_internal.b2http.B2Http method*), 122  
**REQUIRES\_SEEKing** (*b2sdk.\_internal.transfer.inbound.downloader.abstract attribute*), 165  
**REQUIRES\_SEEKing** (*b2sdk.\_internal.transfer.inbound.downloader.simple attribute*), 169  
**RESPONSE\_CLASS** (*b2sdk.\_internal.raw\_simulator.BucketSimulator attribute*), 178  
**ResponseContextManager** (*class in b2sdk.\_internal.b2http*), 120  
**RetentionMode** (*class in b2sdk.v2*), 78  
**RetentionPeriod** (*class in b2sdk.v2*), 79  
**RFC 822**, 85  
**run()** (*b2sdk.\_internal.sync.action.AbstractAction method*), 146  
**run()** (*b2sdk.\_internal.transfer.inbound.downloader.parallel.WriterThread method*), 167

## S

**S3\_API\_URL** (*b2sdk.\_internal.raw\_simulator.RawSimulator attribute*), 181  
**samples\_by\_status\_first** (*b2sdk.\_internal.scan.scan.CountAndSampleScanReport attribute*), 145  
**samples\_by\_status\_last** (*b2sdk.\_internal.scan.scan.CountAndSampleScanReport attribute*), 145  
**save()** (*b2sdk.v2.DownloadedFile method*), 86  
**save\_bucket()** (*b2sdk.\_internal.cache.AbstractCache method*), 130  
**save\_bucket()** (*b2sdk.\_internal.cache.AuthInfoCache method*), 132  
**save\_bucket()** (*b2sdk.\_internal.cache.DummyCache method*), 131  
**save\_bucket()** (*b2sdk.\_internal.cache.InMemoryCache method*), 131  
**save\_bucket()** (*b2sdk.v2.AbstractAccountInfo method*), 43  
**save\_bucket()** (*b2sdk.v2.AbstractCache method*), 51  
**save\_bucket()** (*b2sdk.v2.AuthInfoCache method*), 51  
**save\_bucket()** (*b2sdk.v2.DummyCache method*), 52  
**save\_bucket()** (*b2sdk.v2.InMemoryCache method*), 52  
**save\_bucket()** (*b2sdk.v2.SqliteAccountInfo method*), 36

save\_bucket() (*b2sdk.v2.UrlPoolAccountInfo method*), 49  
save\_to() (*b2sdk.v2.DownloadedFile method*), 86  
SCAN\_RESULT\_CLASS (*b2sdk.\_internal.scan.scan.AbstractScanReport method*), 52  
attribute), 145  
ScanPoliciesManager (class in *b2sdk.v2*), 94  
seek() (*b2sdk.\_internal.stream.chained.ChainedStream method*), 132  
seek() (*b2sdk.\_internal.stream.hashing.StreamWithHash method*), 133  
seek() (*b2sdk.\_internal.stream.progress.ReadingStreamWithProgress method*), 134  
seek() (*b2sdk.\_internal.stream.range.RangeOfInputStream set*)  
method), 135  
seek() (*b2sdk.\_internal.stream.wrapper.StreamWrapper method*), 136  
seek() (*b2sdk.v2.MtimeUpdatedFile method*), 87  
seekable() (*b2sdk.\_internal.stream.chained.ChainedStream method*), 132  
seekable() (*b2sdk.\_internal.stream.wrapper.StreamWrapper method*), 136  
seekable() (*b2sdk.v2.MtimeUpdatedFile method*), 87  
selected\_version (*b2sdk.\_internal.scan.path.B2Path attribute*), 141  
server\_side\_encryption  
(*b2sdk.v2.DownloadVersion attribute*), 84  
server\_side\_encryption (*b2sdk.v2FileVersion attribute*), 82  
ServerDefaultSyncEncryptionSettingsProvider  
(class in *b2sdk.v2*), 100  
SERVICES\_CLASS (*b2sdk.v2.B2Api attribute*), 53  
SESSION\_CLASS (*b2sdk.v2.B2Api attribute*), 53  
set\_auth\_data() (*b2sdk.v2.AbstractAccountInfo method*), 43  
set\_auth\_data() (*b2sdk.v2.SqliteAccountInfo method*), 38  
set\_auth\_data() (*b2sdk.v2.UrlPoolAccountInfo method*), 49  
set\_auth\_data\_with\_schema\_0\_for\_test()  
(*b2sdk.v2.SqliteAccountInfo method*), 34  
set\_bucket\_name\_cache()  
(*b2sdk.\_internal.cache.AbstractCache method*), 130  
set\_bucket\_name\_cache()  
(*b2sdk.\_internal.cache.AuthInfoCache method*), 132  
set\_bucket\_name\_cache()  
(*b2sdk.\_internal.cache.DummyCache method*), 131  
set\_bucket\_name\_cache()  
(*b2sdk.\_internal.cache.InMemoryCache method*), 131  
set\_bucket\_name\_cache() (*b2sdk.v2.AbstractCache method*), 51  
set\_bucket\_name\_cache() (*b2sdk.v2.AuthInfoCache method*), 52  
set\_bucket\_name\_cache() (*b2sdk.v2.DummyCache method*), 52  
set\_bucket\_name\_cache() (*b2sdk.v2.InMemoryCache method*), 53  
set\_bucket\_notification\_rules()  
(*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 115  
set\_bucket\_notification\_rules()  
(*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 119  
set\_bucket\_notification\_rules()  
(*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 184  
set\_bucket\_notification\_rules()  
(*b2sdk.\_internal.session.B2Session method*), 110  
set\_file\_mtime() (in module *b2sdk.\_internal.utils*), 128  
set\_info() (*b2sdk.v2.Bucket method*), 73  
set\_notification\_rules()  
(*b2sdk.\_internal.raw\_simulator.BucketSimulator method*), 180  
set\_notification\_rules() (*b2sdk.v2.Bucket method*), 73  
set\_total\_bytes() (*b2sdk.v2.AbstractProgressListener method*), 89  
set\_type() (*b2sdk.v2.Bucket method*), 74  
set\_upload\_errors()  
(*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 181  
set\_locale() (in module *b2sdk.\_internal.b2http*), 120  
should\_exclude\_b2\_directory()  
(*b2sdk.\_internal.scan.policies.ScanPoliciesManager method*), 144  
should\_exclude\_b2\_directory()  
(*b2sdk.v2.ScanPoliciesManager method*), 95  
should\_exclude\_b2\_file\_version()  
(*b2sdk.\_internal.scan.policies.ScanPoliciesManager method*), 143  
should\_exclude\_b2\_file\_version()  
(*b2sdk.v2.ScanPoliciesManager method*), 95  
should\_exclude\_local\_directory()  
(*b2sdk.\_internal.scan.policies.ScanPoliciesManager method*), 144  
should\_exclude\_local\_directory()  
(*b2sdk.v2.ScanPoliciesManager method*), 95  
should\_exclude\_local\_path()

(*b2sdk.\_internal.scan.policies.ScanPoliciesManager* method), 143

**should\_exclude\_local\_path()** (*b2sdk.v2.ScanPoliciesManager* method), 95

**SIMPLE\_DOWNLOADER\_CLASS** (*b2sdk.\_internal.transfer.inbound.download\_manager.DownloadManager* attribute), 170

**SimpleDownloader** (class in *b2sdk.\_internal.transfer.inbound.downloader.simple*), 169

**SimpleProgressListener** (class in *b2sdk.v2*), 90

**simulate\_notification\_rule\_suspension()** (*b2sdk.\_internal.raw\_simulator.BucketSimulator* method), 180

**size** (*b2sdk.\_internal.scan.path.B2Path* property), 141

**size** (*b2sdk.\_internal.scan.path.LocalPath* attribute), 141

**SIZE** (*b2sdk.\_internal.sync.policy.CompareVersionMode* attribute), 153

**SIZE** (*b2sdk.v2.CompareVersionMode* attribute), 88

**size** (*b2sdk.v2.DownloadVersion* attribute), 84

**size** (*b2sdk.v2FileVersion* attribute), 82

**SKIP** (*b2sdk.\_internal.sync.policy.NewerFileSyncMode* attribute), 153

**SKIP** (*b2sdk.v2.NewerFileSyncMode* attribute), 88

**sort\_key()** (*b2sdk.\_internal.raw\_simulator.FileSimulator* method), 176

**SOURCE\_PREFIX** (*b2sdk.\_internal.sync.policy.AbstractFileSyncPolicy* attribute), 154

**SOURCE\_PREFIX** (*b2sdk.\_internal.sync.policy.CopyPolicy* attribute), 159

**SOURCE\_PREFIX** (*b2sdk.\_internal.sync.policy.DownPolicy* attribute), 155

**SOURCE\_PREFIX** (*b2sdk.\_internal.sync.policy.UpPolicy* attribute), 156

**SPECIAL\_FILE\_INFOS** (*b2sdk.\_internal.raw\_simulator.FileSimulator* attribute), 176

**SQLITE\_ACCOUNT\_INFO\_CLASS** (*b2sdk.\_internal.session.B2Session* attribute), 107

**SqliteAccountInfo** (class in *b2sdk.v2*), 33

**SSE\_B2** (*b2sdk.\_internal.encryption.types.EncryptionMode* attribute), 106

**SSE\_B2\_AES** (*b2sdk.v2* attribute), 105

**SSE\_C** (*b2sdk.\_internal.encryption.types.EncryptionMode* attribute), 106

**SSE\_NONE** (*b2sdk.v2* attribute), 105

**start\_large\_file()** (*b2sdk.\_internal.raw\_api.AbstractRawApi* method), 114

**start\_large\_file()** (*b2sdk.\_internal.raw\_api.B2RawHTTTP* method), 117

**start\_large\_file()** (*b2sdk.\_internal.raw\_simulator.BucketSimulator* method), 180

**start\_large\_file()** (*b2sdk.\_internal.raw\_simulator.RawSimulator* method), 183

**start\_large\_file()** (*b2sdk.\_internal.session.B2Session* method), 109

**stdout** (*b2sdk.v2.SyncReport* attribute), 99

**stream** (*b2sdk.\_internal.stream.chained.ChainedStream* attribute), 126

**StreamOpener** (class in *b2sdk.\_internal.stream.chained*), 133

**StreamWithHash** (class in *b2sdk.\_internal.stream.hashing*), 133

**StreamWithLengthWrapper** (class in *b2sdk.\_internal.stream.wrapper*), 137

**StreamWrapper** (class in *b2sdk.\_internal.stream.wrapper*), 136

**SUPPORTS\_DECODE\_CONTENT** (*b2sdk.\_internal.transfer.inbound.downloader.abstract.AbstractDownloader* attribute), 165

**SUPPORTS\_DECODE\_CONTENT** (*b2sdk.\_internal.transfer.inbound.downloader.parallel.ParallelDownloader* attribute), 166

**SUPPORTS\_DECODE\_CONTENT** (*b2sdk.\_internal.transfer.inbound.downloader.simple.SimpleDownloader* attribute), 169

**suspensionReason** (*b2sdk.\_internal.raw\_api.NotificationRule* attribute), 111

**suspensionReason** (*b2sdk.\_internal.raw\_api.NotificationRuleResponse* attribute), 112

**symlink\_skipped()** (*b2sdk.v2.SyncReport* method), 99

**sync\_folders()** (*b2sdk.\_internal.sync.sync.Synchronizer* method), 164

**sync\_folders()** (*b2sdk.v2.Synchronizer* method), 96

**Synchronizer** (class in *b2sdk.\_internal.sync.sync*), 163

**Synchronizer** (class in *b2sdk.v2*), 95

**SynchronizerManager** (class in *b2sdk.\_internal.sync.policy\_manager*), 161

**SyncReport** (class in *b2sdk.v2*), 97

**T**

**take()** (*b2sdk.\_internal.account\_info.upload\_url\_pool.UploadUrlPool* method), 50

**take\_bucket\_upload\_url()** (*b2sdk.v2.AbstractAccountInfo* method), 44

**take\_bucket\_upload\_url()** (*b2sdk.v2.SqliteAccountInfo* method), 39

**take\_bucket\_upload\_url()** (*b2sdk.v2.UrlPoolAccountInfo* method), 45

**take\_large\_file\_upload\_url()** (*b2sdk.v2.AbstractAccountInfo* method), 45

take\_large\_file\_upload\_url()  
    (*b2sdk.v2.SqliteAccountInfo* method), 39  
take\_large\_file\_upload\_url()  
    (*b2sdk.v2.UrlPoolAccountInfo* method), 46  
targetConfiguration  
    (*b2sdk.\_internal.raw\_api.NotificationRule*  
        attribute), 111  
targetConfiguration  
    (*b2sdk.\_internal.raw\_api.NotificationRuleResponse*  
        attribute), 112  
targetType (*b2sdk.\_internal.raw\_api.NotificationTarget*  
    attribute), 111  
tell()     (*b2sdk.\_internal.raw\_simulator.FakeRaw*  
        method), 177  
tell() (*b2sdk.\_internal.stream.chained.ChainedStream*  
        method), 132  
tell() (*b2sdk.\_internal.stream.range.RangeOfInputStream*  
        method), 135  
tell() (*b2sdk.\_internal.stream.wrapper.StreamWrapper*  
        method), 136  
tell() (*b2sdk.v2.MtimeUpdatedFile* method), 87  
TempDir (class in *b2sdk.v2*), 102  
TIMEOUT (*b2sdk.\_internal.b2http.B2Http* attribute), 121  
TIMEOUT\_FOR\_COPY (*b2sdk.\_internal.b2http.B2Http* at-  
    tribute), 121  
TIMEOUT\_FOR\_UPLOAD (*b2sdk.\_internal.b2http.B2Http*  
    attribute), 121  
TokenType (class in *b2sdk.\_internal.session*), 106  
TqdmProgressListener (class in *b2sdk.v2*), 89  
truncate() (*b2sdk.\_internal.stream.wrapper.StreamWrapper*  
    method), 136  
TRY\_COUNT\_DATA     (*b2sdk.\_internal.b2http.B2Http*  
        attribute), 121  
TRY\_COUNT\_DOWNLOAD (*b2sdk.\_internal.b2http.B2Http*  
        attribute), 121  
TRY\_COUNT\_HEAD     (*b2sdk.\_internal.b2http.B2Http*  
        attribute), 121  
TRY\_COUNT\_OTHER    (*b2sdk.\_internal.b2http.B2Http* at-  
        tribute), 121

U

UnfinishedLargeFile (class in *b2sdk.v2*), 85  
UNKNOWN (*b2sdk.\_internal.encryption.types.EncryptionMode*  
    attribute), 106  
UNKNOWN (*b2sdk.v2.LegalHold* attribute), 78  
UNKNOWN (*b2sdk.v2.RetentionMode* attribute), 78  
UNKNOWN\_BUCKET\_RETENTION (in module *b2sdk.v2*), 80  
UNKNOWN\_FILE\_LOCK\_CONFIGURATION (in module  
    *b2sdk.v2*), 80  
UNKNOWN\_FILE\_RETENTION\_SETTING (in module  
    *b2sdk.v2*), 80  
UNKNOWN\_KEY\_ID (in module *b2sdk.v2*), 105  
UNSET (*b2sdk.v2.LegalHold* attribute), 78

UpAndDeletePolicy     (class  
    ***b2sdk.\_internal.sync.policy***), 156  
UpAndKeepDaysPolicy     (class  
    ***b2sdk.\_internal.sync.policy***), 157  
update() (*b2sdk.\_internal.transfer.inbound.downloader.abstract.EmptyHa*  
    method), 164  
update() (*b2sdk.v2.Bucket* method), 74  
update\_bucket() (*b2sdk.\_internal.raw\_api.AbstractRawApi*  
    method), 114  
update\_bucket() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi*  
    method), 118  
update\_bucket() (*b2sdk.\_internal.raw\_simulator.RawSimulator*  
    method), 183  
update\_bucket() (*b2sdk.\_internal.session.B2Session*  
    method), 109  
update\_compare() (*b2sdk.v2.SyncReport* method), 97  
update\_count() (*b2sdk.v2.SyncReport* method), 99  
update\_digest\_from\_stream() (in module  
    *b2sdk.\_internal.utils*), 126  
update\_file\_legal\_hold()  
    (*b2sdk.\_internal.raw\_api.B2RawHTTPApi*  
        method), 118  
update\_file\_legal\_hold()  
    (*b2sdk.\_internal.raw\_simulator.BucketSimulator*  
        method), 179  
update\_file\_legal\_hold()  
    (*b2sdk.\_internal.raw\_simulator.RawSimulator*  
        method), 182  
update\_file\_legal\_hold()  
    (*b2sdk.\_internal.session.B2Session* method),  
        110  
update\_file\_legal\_hold()     (*b2sdk.v2.B2Api*  
        method), 58  
update\_file\_retention()  
    (*b2sdk.\_internal.raw\_api.AbstractRawApi*  
        method), 114  
update\_file\_retention()  
    (*b2sdk.\_internal.raw\_api.B2RawHTTPApi*  
        method), 118  
update\_file\_retention()  
    (*b2sdk.\_internal.raw\_simulator.BucketSimulator*  
        method), 179  
update\_file\_retention()  
    (*b2sdk.\_internal.raw\_simulator.RawSimulator*  
        method), 182  
update\_file\_retention()  
    (*b2sdk.\_internal.session.B2Session* method),  
        110  
update\_file\_retention()     (*b2sdk.v2.B2Api* method),  
        59  
update\_from\_stream()  
    (*b2sdk.\_internal.utils.IncrementalHexDigester*  
        method), 127  
UPDATE\_INTERVAL (*b2sdk.v2.SyncReport* attribute), 97

update\_legal\_hold() (*b2sdk.v2.DownloadVersion method*), 84  
 update\_legal\_hold() (*b2sdk.v2FileVersion method*), 82  
 update\_retention() (*b2sdk.v2.DownloadVersion method*), 85  
 update\_retention() (*b2sdk.v2FileVersion method*), 82  
 update\_total() (*b2sdk.v2.SyncReport method*), 99  
 update\_transfer() (*b2sdk.v2.SyncReport method*), 97  
 upload() (*b2sdk.v2.Bucket method*), 74  
 upload\_bytes() (*b2sdk.v2.Bucket method*), 60  
 upload\_file() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 115  
 upload\_file() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 118  
 upload\_file() (*b2sdk.\_internal.raw\_simulator.BucketSimulator method*), 180  
 upload\_file() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 184  
 upload\_file() (*b2sdk.\_internal.session.B2Session method*), 109  
 upload\_local\_file() (*b2sdk.v2.Bucket method*), 61  
 UPLOAD\_PART (*b2sdk.\_internal.session.TokenType attribute*), 106  
 upload\_part() (*b2sdk.\_internal.raw\_api.AbstractRawApi method*), 115  
 upload\_part() (*b2sdk.\_internal.raw\_api.B2RawHTTPApi method*), 119  
 upload\_part() (*b2sdk.\_internal.raw\_simulator.BucketSimulator method*), 180  
 upload\_part() (*b2sdk.\_internal.raw\_simulator.RawSimulator method*), 184  
 upload\_part() (*b2sdk.\_internal.session.B2Session method*), 109  
 UPLOAD\_PART\_MATCHER (*b2sdk.\_internal.raw\_simulator.RawSimulator attribute*), 181  
 UPLOAD\_SMALL (*b2sdk.\_internal.session.TokenType attribute*), 107  
 upload\_timestamp (*b2sdk.v2.DownloadVersion attribute*), 85  
 upload\_timestamp (*b2sdk.v2FileVersion attribute*), 83  
 upload\_unbound\_stream() (*b2sdk.v2.Bucket method*), 75  
 UPLOAD\_URL\_MATCHER (*b2sdk.\_internal.raw\_simulator.RawSimulator attribute*), 181  
 UploadMode (*class in b2sdk.\_internal.transfer.outbound.upload\_source*), 171  
 UploadSourceBytes (*class in b2sdk.\_internal.transfer.outbound.upload\_source*), 171  
 UploadSourceLocalFile (*class in b2sdk.\_internal.transfer.outbound.upload\_source*), 173  
 UploadSourceLocalFileBase (*class in b2sdk.\_internal.transfer.outbound.upload\_source*), 172  
 UploadSourceLocalFileRange (*class in b2sdk.\_internal.transfer.outbound.upload\_source*), 173  
 UploadSourceStream (*class in b2sdk.\_internal.transfer.outbound.upload\_source*), 174  
 UploadSourceStreamRange (*class in b2sdk.\_internal.transfer.outbound.upload\_source*), 174  
 UploadUrlPool (*class in b2sdk.\_internal.account\_info.upload\_url\_pool*), 50  
 UpPolicy (*class in b2sdk.\_internal.sync.policy*), 155  
 url (*b2sdk.\_internal.raw\_api.NotificationTargetConfiguration attribute*), 111  
 url (*b2sdk.\_internal.raw\_simulator.FakeRequest attribute*), 177  
 UrlPoolAccountInfo (*class in b2sdk.v2*), 45  
**V**  
 validate\_b2\_file\_name() (*in module b2sdk.\_internal.utils*), 128  
 value (*b2sdk.\_internal.raw\_api.NameValueDict attribute*), 111  
**W**  
 wrap\_sources\_iterator() (*b2sdk.v2.WriteIntent class method*), 103  
 wrap\_with\_range() (*in module b2sdk.\_internal.stream.range*), 136  
 writable() (*b2sdk.\_internal.stream.wrapper.StreamWrapper method*), 137  
 write() (*b2sdk.\_internal.stream.progress.WritingStreamWithProgress method*), 135  
 write() (*b2sdk.\_internal.stream.wrapper.StreamWrapper method*), 137  
 write() (*b2sdk.v2.MtimeUpdatedFile method*), 87  
 WriteIntent (*class in b2sdk.v2*), 103  
 WriterThread (*class in b2sdk.\_internal.transfer.inbound.downloader.parallel*), 167  
 WritingStreamWithProgress (*class in b2sdk.\_internal.stream.progress*), 135  
**Z**  
 zip\_folders() (*in module b2sdk.\_internal.scan.scan*), 144